


PS24 POWER SUPPLY

- High efficiency, universal input switching supply.
- IEC 320/13 AC connector.
- Efficiency: 75% typical, full load.



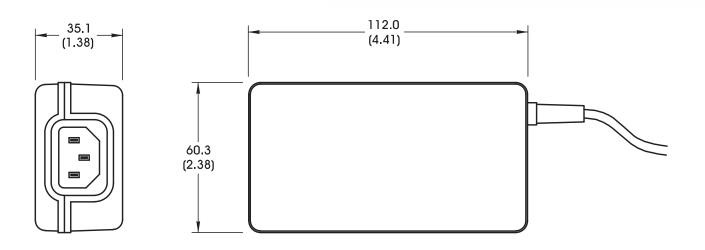

DIMENSIONS ARE IN MILLIMETERS (INCHES)

SPECIFICATION

1. Input power	90 VAC to 264 VAC universal; AC input frequency: 47 Hz to 63 Hz
2. Output power	30 Watts
3. Protection	Overvoltage protection: 150% max., non-latching
	Overcurrent protection: short circuit protected
4. MTBF	Calculated MTBF is greater than 100,000 hours
5. Safety compliance	1) UL1950; 2) CSA 22.2, No. 950; 3) CSA 22.2, No. 234 Levels 3;
	4) IEC 950; 5) TUV/CS (EN60950)

6. Operating temperature range... 0 to 65 degrees centigrade

PART NUMBER DESIGNATION

PS24

The standard product; P/N PS24, when in stock, can be shipped the day after receipt of purchase order. Purchase orders must arrive at the factory by 12:00 noon to begin processing that day.

For information on electronic controllers, lighting devices, filters and camera brackets, please see their respective specification pages.

Data and specifications are subject to change without notice.

To locate a local distributor, request a quote or place an order, please contact ADVANCED iLLUMINATION'S

Customer Service Department at (802) 767-3830, between the hours of 8:30 a.m. and 5:00 p.m. E.S.T.

ADVANCED ILLUMINATION

24 Peavine Drive Rochester, VT 05767 Phone: (802) 767-3830 Fax: (802) 767-3831 www.advancedillumination.com