

Features

- 2:1 wide input range
- Short circuit, overload, over-voltage protected
- Built in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty
- 15 Watt



Model ^{1,3}	Input Voltage	Output Voltage	Output Current	Ripple ² & Noise	Load/Line Regulation	Efficiency
VSD-15A-5	9.2~18V DC	5V DC	3 A	100mV	±0.5%	68%
VSD-15A-12	9.2~18V DC	12V DC	1.25 A	120mV	±0.3%	72%
VSD-15A-24	9.2~18V DC	24V DC	0.625 A	150mV	±0.2%	70%
VSD-15B-5	18~36V DC	5V DC	3 A	100mV	±0.5%	76%
VSD-15B-12	18~36V DC	12V DC	1.25 A	120mV	±0.3%	76%
VSD-15B-24	18~36V DC	24V DC	0.625 A	150mV	±0.2%	77%
VSD-15C-5	36~72V DC	5V DC	3 A	100mV	±0.5%	75%
VSD-15C-12	36~72V DC	12V DC	1.25A	120mV	±0.3%	79%
VSD-15C-24	36~72V DC	24V DC	0.625 A	150mV	±0.2%	81%

Notes:

- 1 All parameters Not specifically mentioned are measured at normal input, rated load and 25°C of ambient temp.
- 2 Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
- 3 The power supply is considered a component which will be installed into final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

Input Voltage

Parameter	Conditions/Description	Min	Nom	Max	Units
Input voltage	A	9.2	12	18	DC
	B	18	24	36	DC
	C	36	48	72	DC

Output

Parameter	Conditions/Description	Min	Nom	Max	Units
DC Voltage adj.		4.75	5	5.5	VDC
		10.8	12	13.2	VDC
		21.6	24	26.4	VDC
Over Voltage Protection		5.75		6.75	VDC
		13.8		16.2	VDC
		27.6		32.4	VDC
DC output power	For all models		15 Watts		
Voltage Tolerance	Model B is $\pm 2\%$, $\pm 1\%$ for all other models				
Overload	hiccup mode, recovers automatically after fault condition is removed. For all models.				105~160%
Hold up time	12VDC/24VDC/48VDC at full load		25		mS
Set up	For all models		2.5s		

Protection Circuit

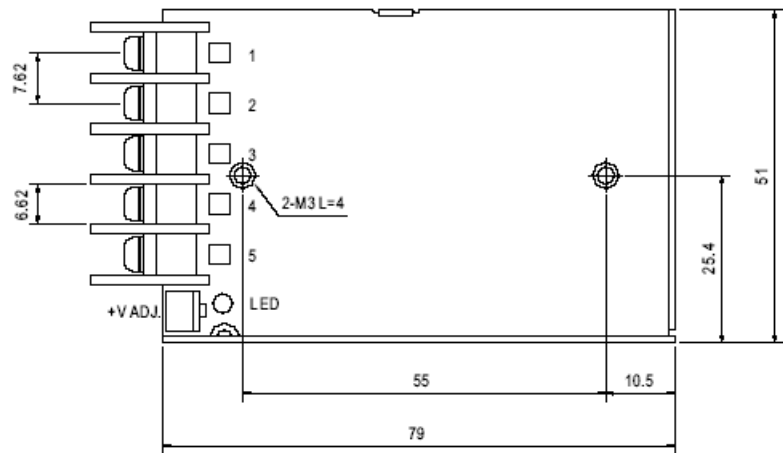
Parameter	Conditions/Description
Input Fuse	Built-in ac fuse. A blown fuse usually indicates permanent damage to the power supply serviceable by factory only.
Overload	Current limiting starts at 110-140% of the rated output current in foldback mode and recovers automatically.
Short circuit	Short circuit can be continuous. Recovers automatically upon removal of short.
Output Over-voltage	Output is protected against overvoltage. Unit shuts down and latches when voltage at output terminals exceeds 130%. AC input needs to be reset to restart the power supply.
Over temp.	Power supply shuts down when temperature is in excess of 85 °C. Auto recovery.

General and Safety

Parameter	Conditions/Description	Min	Nom	Max	Units
Operating temp.	(refer to output derating curve)	-10		60	°C
Storage temp.		-20		85	°C
Operating humid.	Non-condensing	20%		90%	RH
Storage humid.	Non-condensing	10%		95%	RH
Temperature coefficient		±0.3% / °C (0~50°C)			
EMI	EN55022(CISPR22) CLASS B				
Safety (EMC)	EN55022 Class B (radiation), En61000-4-2, 3, 4, 6, 8, ENV50204				
Vibration	2G 10min/i cycle, 60 min on X, Y and Z Axis	10		500	Hz
Withstand Voltage	I/P-O/P	3000			VDC
	I/P-FG	1500			VDC
	O/P-FG	800			VDC
Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG	100mΩ min. / 500VDC			
Cooling	Convection				

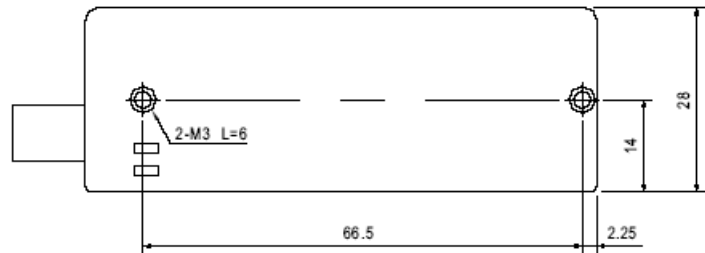
Mechanical

Parameter	Conditions/Description	Min	Nom	Max	Units
Weight				360	grams
Enclosure	79(L) x 51(W) x 28(H) mm				inches

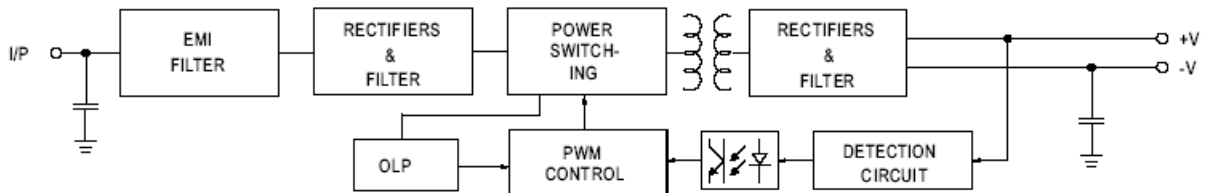


Terminal Pin. No Assignment

Pin No.	Assignment	Pin No.	Assignment
1	DC INPUT V+	4	DC OUTPUT +V
2	DC INPUT V-	5	DC OUTPUT -V
3	FG		


Block Diagram

fosc : 96KHz


Output Derating
Static Characteristics
