


RM44 magnetic encoder base unit

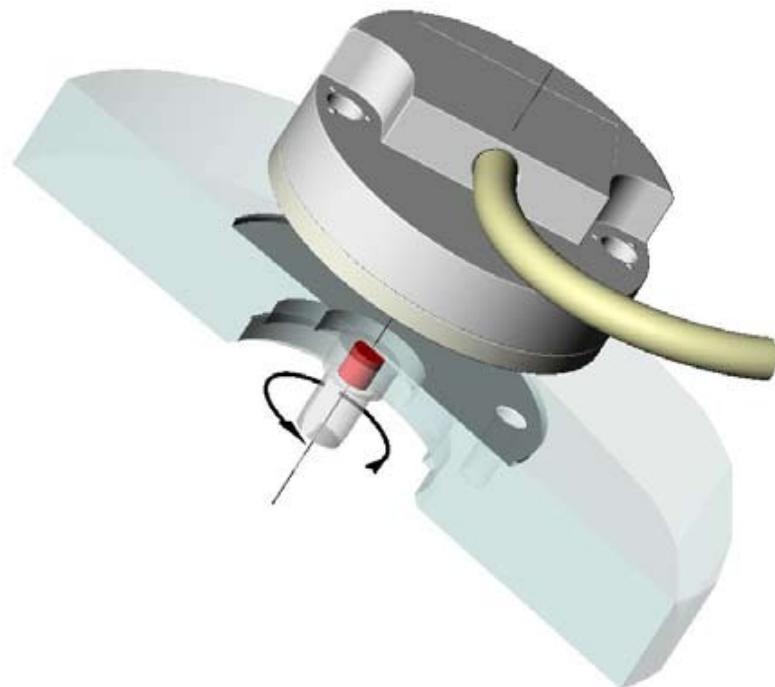

General description

The RM44 is an encoder designed for integration onto electric motors or other devices for shaft position and rotational speed measurement.

The solid metal housing helps achieve the highest IP ratings, high EMC immunity, extended operating temperature range and the best possible shock and vibration resistance.

Output signals are provided in industry standard absolute,

incremental, analogue sinusoidal and linear voltage formats.


Available are resolutions of up to 13 bit absolute SSI and/or 8192 cpr incremental for 5 V or 24 V power supply.

With the provided magnet a system accuracy of 0.2° is achievable. A range of magnetic actuators for easy integration onto or into the shaft is also offered for easy system integration.


System features

- Easy to install – with self locating design
- Low cost for OEM integration
- Fully sealed to IP68
- High reliability from proven non-contact sensing technology
- RoHS compliant (lead free)

RM44 dimensions

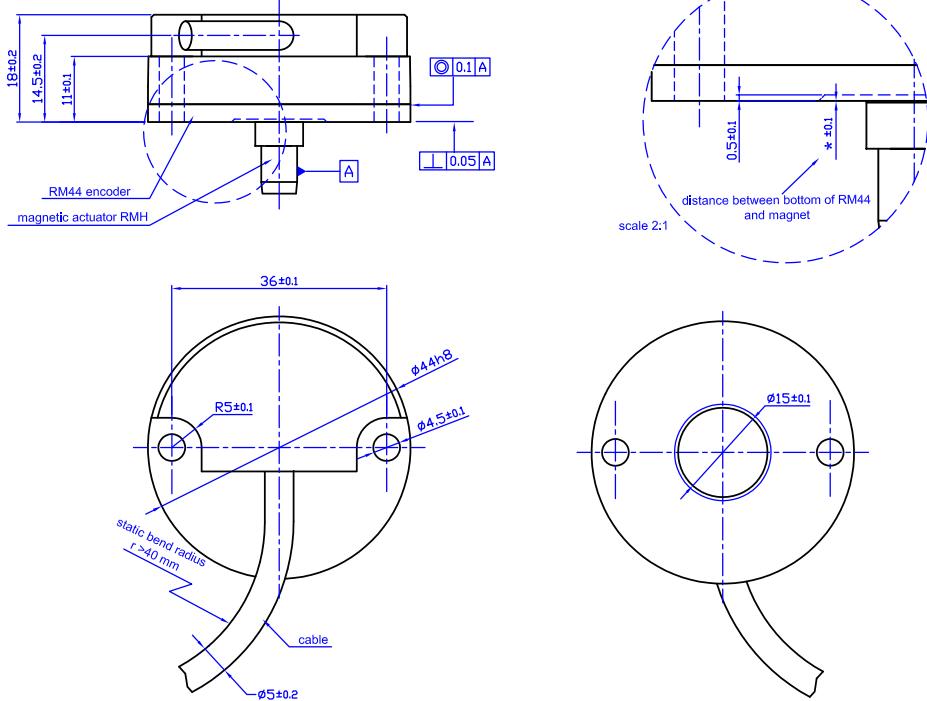

RM44 installation drawing

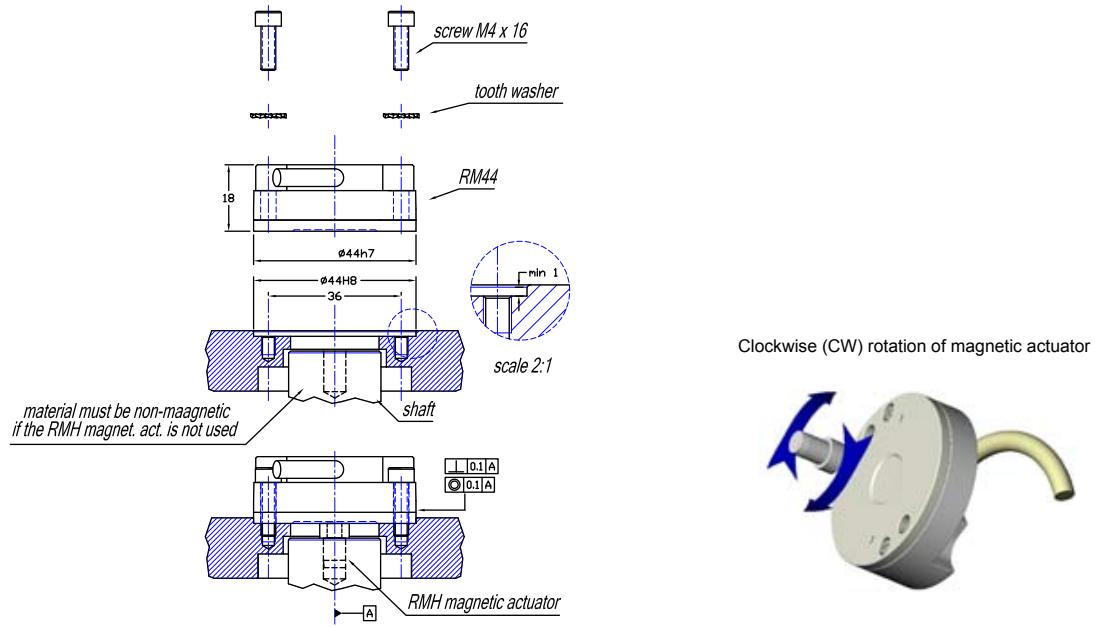

Operating and electrical specifications

Humidity (for IP64 version)	Storage 95% maximum relative humidity (non-condensing) (IEC 61010-1) Operating 80% maximum relative humidity (non-condensing) (IEC 61010-1)
Acceleration	Operating 500 m/s ² BS EN 60068-2-7:1993 (IEC 68-2-7:1983)
Shock (non-operating)	1000 m/s ² , 6 ms, 1/2 sine BS EN 60068-2-27:1993 (IEC 68-2-27:1987)
Vibration (operating)	100 m/s ² max at 55 to 2000 Hz BS EN 60068-2-6:1996 (IEC 68-2-6:1995)
EMV compliance	BS EN 61326
Cable	Outside diameter 5 mm
Mass	Encoder unit 1 m cable (no connector) IP64 112 g, IP68 129 g. Magnetic actuator <2 g
Environmental sealing	IP64 (IP68 optional) BS EN 60529

Output specifications - 5 V supply


RM44AC – Analogue sinusoidal outputs

2 channels V_A V_B sinusoids (90° phase shifted, single ended)

Power supply	$V_{dd} = 5 \text{ V} \pm 5\%$
Power consumption	13 mA
Outputs	Signal amplitude $2 \pm 0.2 \text{ V}_{pp}$ Signal offset $V_{dd}/2 \pm 5 \text{ mV}$
Max. output frequency	1 kHz
Max. cable length	3 m
Operating temperature	-40 °C to +125 °C (IP64) -40 °C to +85 °C (IP68)
Maximum speed	60,000 rpm
Internal serial impedance	720 Ω

Connections	Function	Wire colour
Shield	-	
V_{dd}	Red	
GND	Orange	
V_A	Black	
V_B	Brown	

Timing diagram

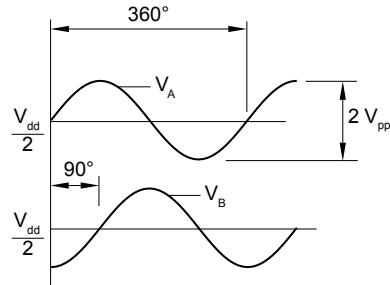

V_A leads V_B by 90° for clockwise rotation of magnetic actuator.

RM44IE - Incremental open collector


Low cost alternative for ball bearing encoders

Power supply	$V_{dd} = 5 \text{ V} \pm 5\%$
Resolution	32, 64 ppr (128, 256 cpr)
Power consumption	13 mA (not loaded)
Maximum output load	20 mA
Output signals	A, B, Z
Max. cable length	20 m
Operating temperature	0 °C to +70 °C (-40 °C to +125 °C IP64, option 18) (-40 °C to +85 °C IP68, option 18)
Maximum speed	60,000 rpm
Accuracy*	±0.7°
Hysteresis	0.45°

* Worst case within operational parameters including magnet position and temperature.


Connections	Function	Wire colour
Shield	-	
V_{dd}	Red	
GND	Blue	
A	Grey	
B	Green	
Z	White	

Timing diagram

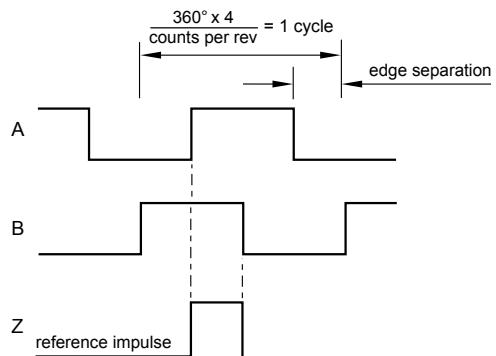

Z reference impulse
 Z leads A for clockwise rotation of magnetic actuator.

Recommended signal termination

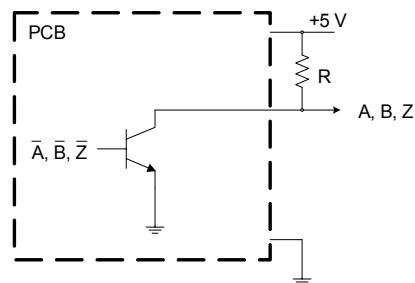

A **RENISHAW** associate company

Data sheet
RM44D01_03

RM44IC - Incremental, RS422A, 5 V

Alternative for optical encoders

Power supply	$V_{dd} = 5 \text{ V} \pm 5\%$
Power consumption	35 mA
Output signals	A, B, Z, A-, B-, Z- (RS422A)
Max. cable length	50 m
Operating temperature	-25 °C to +85 °C (-40 °C to +125 °C option 18)*
Edge separation	1 μs minimum

* Only available with IP64 sealing.

Resolution options (counts per rev)	Maximum speed (rpm)	Accuracy*	Hysteresis
320, 400, 500, 512	30,000	±0.7°	0.18°
800, 1,000, 1,024	20,000	±0.5°	0.18°
1,600, 2,000, 2,048	10,000	±0.5°	0.18°
4,096	5,000	±0.5°	0.18°
8,192	2,500	±0.5°	0.18°

* Worst case within operational parameters including magnet position and temperature.

Connections

Function	Wire colour
Shield	-
V_{dd}	Red
GND	Blue
A	Grey
A-	Pink
B	Green
B-	Yellow
Z	White
Z-	Brown

RM44SC - Absolute binary synchro-serial (SSI), RS422A, 5 V

Alternative for optical encoders

Power supply	$V_{dd} = 5 \text{ V} \pm 5\%$
Power consumption	35 mA
SSI output code	Natural binary
Data outputs	Serial data (RS422A)
Data inputs	Clock (RS422A)
Repeatability	≤0.07°
Max. cable length	100 m (at 1 MHz)
Operating temperature	-40 °C to +125 °C (IP64) -40 °C to +85 °C (IP68)


Resolution options (positions per rev)	Maximum speed (rpm)	Accuracy*	Hysteresis
320, 400, 500, 512	30,000	±0.7°	0.18°
800, 1,000, 1,024	20,000	±0.5°	0.18°
1,600, 2,000, 2,048	10,000	±0.5°	0.18°
4,096	5,000	±0.5°	0.18°
8,192	2,500	±0.5°	0.18°

* Worst case within operational parameters including magnet position and temperature.

Connections


Function	Wire colour
Shield	-
V_{dd}	Red
GND	Blue
Clock	White
Clock-	Brown
Data	Green
Data-	Yellow

Timing diagram
(complementary signals not shown)

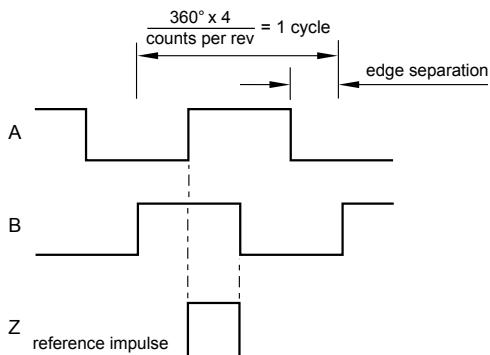


B leads A for clockwise rotation of magnetic actuator.

Recommended signal termination

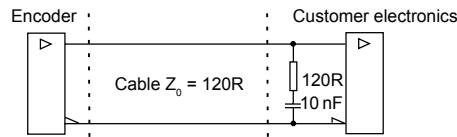


Timing diagram

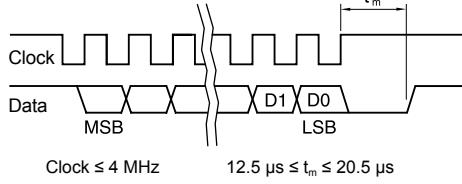

Position increases for clockwise rotation of magnetic actuator.

Recommended signal termination

(For data output lines only)

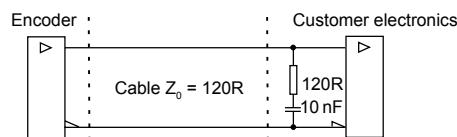

RM44SI - Absolute binary synchro-serial (SSI) + Incremental, RS422A, 5 V

Complex feedback device for absolute position at start up as well as during operation + incremental outputs.

Both the incremental and the SSI output always have the same fixed resolution.

Power supply	$V_{dd} = 5 \text{ V} \pm 5\%$
Power consumption	35 mA
SSI output code	Natural binary
Data outputs	Serial data (RS422A)
Data inputs	Clock (RS422A)
Incremental outputs	A, B, Z, A-, B-, Z- (RS422A)
Max. cable length	50 m
Operating temperature	-25 °C to +85 °C (-40 °C to +125 °C option 18)*

* Only available with IP64 sealing.

Resolution options (positions/counts per rev)	Maximum speed (rpm)	Accuracy*	Hysteresis
320, 400, 500, 512	30,000	±0.7°	0.18°
800, 1,000, 1,024	20,000	±0.5°	0.18°
1,600, 2,000, 2,048	10,000	±0.5°	0.18°
4,096	5,000	±0.5°	0.18°
8,192	2,500	±0.5°	0.18°

* Worst case within operational parameters including magnet position and temperature.

Connections


	Function	Wire colour
Incremental	Shield	-
	V_{dd}	Red
	GND	Blue
	A	Grey
	A-	Pink
	B	Green
SSI	B-	Yellow
	Z	White
	Z-	Brown
	Clock	Black
	Clock-	Violet
	Data	Grey/Pink
	Data-	Red/Blue

RM44V - Linear voltage output

Alternative for potentiometers

Power supply	$V_{dd} = 5 \text{ V} \pm 5\%$
Power consumption	20 mA (not loaded)
Output voltage	0 V to V_{dd}
Output loading	Max. 10 mA
Nonlinearity	1 %
Max. cable length	20 m
Operating temperature	-40 °C to +125 °C (IP64) -40 °C to +85 °C (IP68)
Maximum speed*	30,000 rpm


Connections	Function	Wire colour
	Shield	-
	V_{dd}	Red
	GND	Orange
	V_{out}	Black

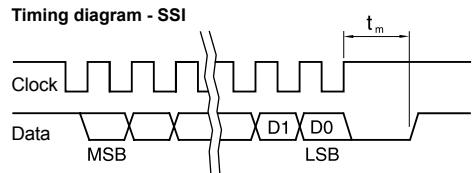

Clock ≤ 4 MHz $12.5 \mu\text{s} \leq t_m \leq 20.5 \mu\text{s}$
Position increases for clockwise rotation of magnetic actuator.

Timing diagram - Incremental


(complementary signals not shown)

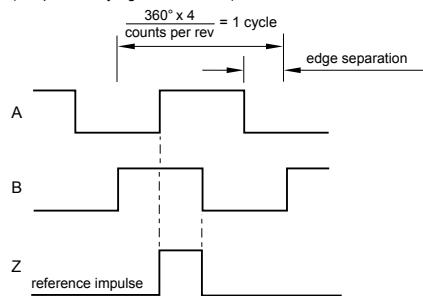


B leads A for CW rotation of magnetic actuator.

Recommended signal termination

(for incremental signals + SSI data output lines only)

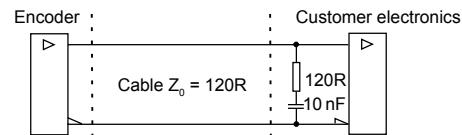

Electrical output

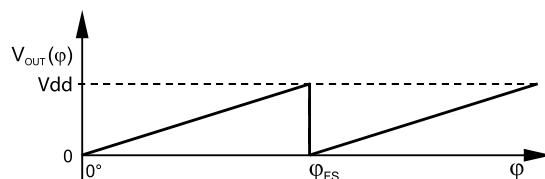

Output type and electrical variant

φ _{FS}	360°	180°	90°	45°
CW	VA	VB	VC	VD
CCW	VE	VF	VG	VH

A RENISHAW® associate company

Output specifications - 24 V supply

RM44IA - Incremental, push-pull, 24 V

Power supply	$V_{dd} = 8 \text{ V to } 26 \text{ V}$
Power consumption	50 mA - at 24 V
Max. output load	30 mA
Output signals	A, B, Z, A-, B-, Z- (RS422A)
Max. cable length	20 m
Operating temperature	-40 °C to +85 °C
Edge separation	min. 1 μs

Resolution options (counts per rev)	Maximum speed (rpm)	Accuracy*	Hysteresis
320, 400, 500, 512	30,000	±0.7°	0.18°
800, 1,000, 1,024	20,000	±0.5°	0.18°
1,600, 2,000, 2,048	10,000	±0.5°	0.18°
4,096	5,000	±0.5°	0.18°
8,192	2,500	±0.5°	0.18°


* Worst case within operational parameters including magnet position and temperature.

Connections

Function	Wire colour
Shield	-
V_{dd}	Red
GND	Blue
A	Grey
A-	Pink
B	Green
B-	Yellow
Z	White
Z-	Brown

Timing diagram

(complementary signals not shown)

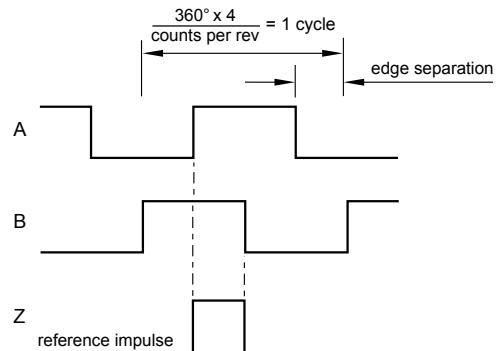

B leads A for clockwise rotation of magnetic actuator.

RM44IB - Incremental, open collector NPN, 24 V

Square wave output


Power supply	$V_{dd} = 8 \text{ V to } 26 \text{ V}$
Power consumption	25 mA
Max. output load	20 mA
Output signals	A, B, Z
Resolution	32, 64 ppr (128, 256 cpr)
Max. cable length	20 m
Temperature	Operating 0 °C to +70 °C (-40 °C to +85 °C option 18) Storage -25 °C to +85 °C

Connections

Function	Wire colour
Shield	-
V_{dd}	Red
GND	Blue
A	Grey
B	Green
Z	White

Timing diagram

(complementary signals not shown)

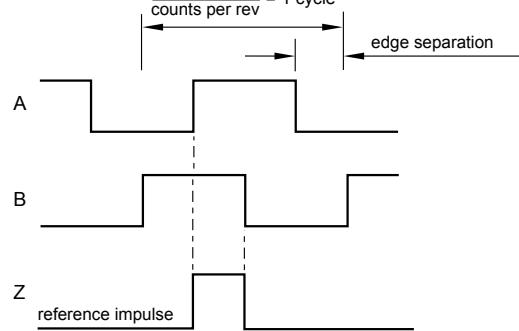

B leads A for CW rotation of magnetic actuator.

RM44 ordering code



RM44 encoder-sensor unit
eg. RM44IC0013B10F2E10

RM44	IC	00	13B	10	F	2	E	10
Series								
Output type								
AC - Analogue sinusoidal, 5 V								
IA - Incremental, push pull, 24 V								
IB - Incremental, open collector NPN, 24 V								
IC - Incremental, RS422A, 5 V								
IE - Incremental, open collector, 5 V								
SC - Absolute binary synchro-serial (SSI), RS422A, 5 V								
SI - SSI + Incremental, RS422A, 5 V								
V _x - Linear voltage:								
Linear voltage output 0 - 5 V, supply 5 V DC								
	360°	180°	90°	45°				
CW	VA	VB	VC	VD				
CCW	VE	VF	VG	VH				
Shaft size								
00 - N/A								
Resolution								
01S - one sine/cosine period per rev (for AC output only)								
07B - 128 counts or positions per revolution (for output types IE and IB)								
08B - 256 counts or positions per revolution (for output types IE and IB)								
09B - 512 counts or positions per revolution (for output types V _x and IB)								
For output types IC, IA, SC and SI:								
Decimal								
D32 - 320	D80 - 800	2D0 - 2000	08B - 256	11B - 2048				
D40 - 400	1D0 - 1000		09B - 512	12B - 4096				
D50 - 500	1D6 - 1600		10B - 1024	13B - 8192				

NOTE: Not all combinations are valid.


A **RENISHAW**® associate company

Magnetic actuator and magnet ordering information

Actuator for integration onto shaft



Shaft = Ø^ah7
Fixing: Grub screw provided

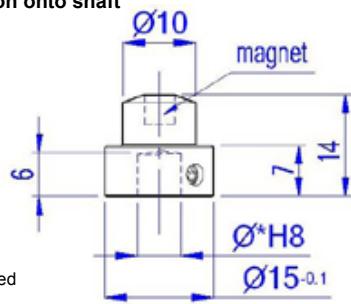

Part numbers:


For resolutions up to 9 bit absolute (512 cpr incremental)
RMA04A2A00 – Ø4 mm shaft **RMA10A2A00** – Ø10 mm shaft
RMA05A2A00 – Ø5 mm shaft **RMA19A2A00** – Ø3/16" shaft
RMA06A2A00 – Ø6 mm shaft **RMA25A2A00** – Ø1/4" shaft
RMA08A2A00 – Ø8 mm shaft **RMA37A2A00** – Ø3/8" shaft

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMA04A3A00 – Ø4 mm shaft **RMA10A3A00** – Ø10 mm shaft
RMA05A3A00 – Ø5 mm shaft **RMA19A3A00** – Ø3/16" shaft
RMA06A3A00 – Ø6 mm shaft **RMA25A3A00** – Ø1/4" shaft
RMA08A3A00 – Ø8 mm shaft **RMA37A3A00** – Ø3/8" shaft

Actuator for integration into shaft



Hole = Ø6G7
Fixing: Glue (recommended – LOCTITE 648)

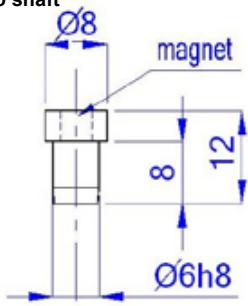

Part numbers:


For resolutions up to 9 bit absolute (512 cpr incremental)
RMH06A2A00

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMH06A3A00

Magnet for direct recessing in non-ferrous shafts



Fixing: Glue (recommended – LOCTITE 648)



Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMM44A2A00 (individually packed) – for sample quantities only
RMM44A2C00 (packed in tubes)

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMM44A3A00 (individually packed) – for sample quantities only
RMM44A3C00 (packed in tubes)

RE58 flange part numbering

Refer to RE58 datasheet for further details.



Part numbers:

RE58A10 - Ø58 mm	10 mm shaft
RE58B06 - Ø58 mm	6 mm shaft
RE58C10 - Ø58 mm	10 mm shaft

All RE58 flanges are supplied with required washer and M4 screws for RM44 encoder attachment.

Head office

RLS merilna tehnika d.o.o.
Cesta II. grupe odredov 25
SI-1261 Ljubljana - Dobrunje
Slovenia

T: +386 1 5272100
F: +386 1 5272129
E: mail@rls.si
www.rls.si

Document revision details

Issue	Date	Page	Amendments done
02	26. 2. 2008	-	New layout with new images, outputs V and IB, SSI clock, vibration shock test
03	14. 1. 2009	-	New layout

RENISHAW is our worldwide sales support partner for Magnetic Encoders.

Australia
T +61 3 9521 0922
E australia@renishaw.com

Germany
T +49 7127 9810
E germany@renishaw.com

The Netherlands
T +31 76 543 11 00
E benelux@renishaw.com

Sweden
T +46 8 584 90 880
E sweden@renishaw.com

Austria
T +43 2236 379790
E austria@renishaw.com

Hong Kong
T +852 2753 0638
E hongkong@renishaw.com

Poland
T +48 22 577 11 80
E poland@renishaw.com

Switzerland
T +41 55 415 50 60
E switzerland@renishaw.com

Brazil
T +55 11 4195 2866
E brazil@renishaw.com

Hungary
T +36 23 502 183
E hungary@renishaw.com

Russia
T +7 495 231 1677
E russia@renishaw.com

Taiwan
T +886 4 2473 3177
E taiwan@renishaw.com

Canada
T +1 905 828 0104
E canada@renishaw.com

India
T +91 20 6674 6751
E india@renishaw.com

Singapore
T +65 6897 5466
E singapore@renishaw.com

UK
T +44 1453 524524
E uk@renishaw.com

The People's Republic of China
T +86 10 8448 5306
E beijing@renishaw.com

Israel
T +972 4 953 6595
E israel@renishaw.com

Slovenia (Head Office)
T +386 1 52 72 100
E mail@rls.si

USA
T +1 847 286 9953
E usa@renishaw.com

Czech Republic
T +420 5 4821 6553
E czech@renishaw.com

Italy
T +39 011 966 10 52
E italy@renishaw.com

South Korea
T +82 2 2108 2830
E southkorea@renishaw.com

For all other countries
Please contact RLS head office

France
T +33 1 64 61 84 84
E france@renishaw.com

Japan
T +81 3 5366 5316
E japan@renishaw.com

Spain
T +34 93 663 34 20
E spain@renishaw.com

T +386 1 52 72 100
E mail@rls.si

RLS merilna tehnika d.o.o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS merilna tehnika d.o.o. excludes liability, howsoever arising, for any inaccuracies in this document.
© 2009 RLS d.o.o.