


Single Thyristor Module


I_{TRMS} = 85 A
V_{RRM} = 1200-1600 V
I_{TAV} = 54 A

Preliminary data

| V _{RSM} | V _{RRM} | Type |
|------------------|------------------|--------------|
| V _{DSM} | V _{DRM} | |
| V | V | |
| 1200 | 1200 | MCO 50-12i06 |
| 1600 | 1600 | MCO 50-16i06 |



miniBLOC, SOT-227 B



| Symbol | Conditions | Maximum Ratings | | |
|-----------------------|---|--|--|--------------------------------------|
| I _{TRMS} | T _{VJ} = T _{VJM} | 85 | A | |
| I _{TAV} | T _C = 80°C; (180° sine) | 54 | A | |
| I _{TSM} | T _{VJ} = 45°C; V _R = 0 | t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine | 740 800 | A A |
| | T _{VJ} = T _{VJM} V _R = 0 | t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine | 650 700 | A A |
| I ² t | T _{VJ} = 45°C V _R = 0 | t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine | 2740 2700 | A ² s A ² s |
| | T _{VJ} = T _{VJM} V _R = 0 | t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine | 2100 2100 | A ² s A ² s |
| (di/dt) _{cr} | T _{VJ} = T _{VJM} f = 50 Hz, t _p = 200 µs V _D = $\frac{2}{3}$ V _{DRM} I _G = 0.3 A di _G /dt = 0.3 A/µs | repetitive, I _T = 150 A non repetitive, I _T = I _{TAVM} | 100 500 | A/µs A/µs |
| (dv/dt) _{cr} | T _{VJ} = T _{VJM} ; R _{GK} = ∞; method 1 (linear voltage rise) | V _{DR} = $\frac{2}{3}$ V _{DRM} | 1000 | V/µs |
| P _{GM} | T _{VJ} = T _{VJM} I _T = I _{TAVM} | t _p = 30 µs t _p = 300 µs | 10 5 0.5 | W W W |
| P _{GAVM} | | | | 0.5 W |
| V _{RGM} | | | 10 | V |
| T _{VJ} | | | -40...+150 | °C |
| T _{VJM} | | | 150 | °C |
| T _{stg} | | | -40...+150 | °C |
| V _{ISOL} | 50/60 Hz, RMS; I _{ISOL} ≤ 1 mA | | 2500 | V~ |
| M _d | Mounting torque (M4) Terminal connection torque (M4) | | 1.1 - 1.5 / 9 - 13 Nm/lb.in. 1.1 - 1.5 / 9 - 13 Nm/lb.in. | |
| Weight | typ. | | 30 | g |


Data according to IEC 60747 and to a single thyristor/diode unless otherwise stated.

IXYS reserves the right to change limits, Conditions and dimensions.

© 2004 IXYS All rights reserved

| Symbol | Conditions | Characteristic Values | | |
|---------------|--|-----------------------|------|-----------|
| $I_{RRM/DRM}$ | $T_{VJ} = 125^\circ C; V_R = V_{RRM}; V_D = V_{DRM}$ | \leq | 3 | mA |
| V_T | $I_T = 50; T_{VJ} = 25^\circ C$ | \leq | 1.3 | V |
| V_{TO} | For power-loss calculations only | | 0.9 | V |
| r_T | | | 5.8 | $m\Omega$ |
| V_{GT} | $V_D = 6 V; T_{VJ} = 25^\circ C$ | \leq | 1.4 | V |
| | $T_{VJ} = -40^\circ C$ | \leq | 1.6 | V |
| I_{GT} | $V_D = 6 V; T_{VJ} = 25^\circ C$ | \leq | 80 | mA |
| | $T_{VJ} = -40^\circ C$ | \leq | 120 | mA |
| V_{GD} | $T_{VJ} = T_{VJM}; V_D = \frac{2}{3} V_{DRM}$ | \leq | 0.2 | V |
| I_{GD} | | \leq | 5 | mA |
| I_L | $T_{VJ} = 25^\circ C; t_p = 10 \mu s$ $I_G = 0.3 A; di_G/dt = 0.3 A/\mu s$ | \leq | 450 | mA |
| I_H | $T_{VJ} = 25^\circ C; V_D = 6 V; R_{GK} = \infty$ | \leq | 100 | mA |
| t_{gd} | $T_{VJ} = 25^\circ C; V_D = \frac{1}{2} V_{DRM}$ $I_G = 0.3 A; di_G/dt = 0.3 A/\mu s$ | \leq | 2 | μs |
| t_q | $T_{VJ} = T_{VJM}; I_T = 11 A, t_p = 200 \mu s; di/dt = -10 A/\mu s$ $V_R = 100 V; dv/dt = 15 V/\mu s; V_D = \frac{2}{3} V_{DRM}$ | typ. | 150 | μs |
| R_{thJC} | DC current | | 0.72 | K/W |
| R_{thCH} | DC current | typ. | 0.4 | K/W |
| d_s | Creeping distance on surface | | 8 | mm |
| d_A | Creepage distance in air | | 4 | mm |
| a | Max. allowable acceleration | | 50 | m/s^2 |

miniBLOC, SOT-227 B

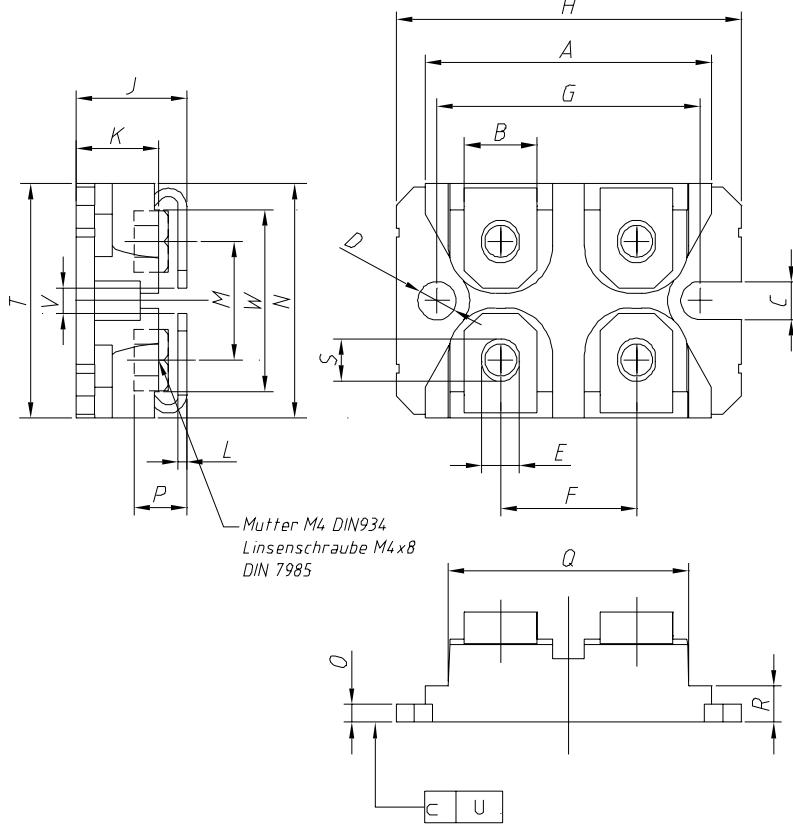

M4 screws (4x) supplied

| Dim. | Millimeter Min. | Millimeter Max. | Inches Min. | Inches Max. |
|------|--------------------|--------------------|----------------|----------------|
| A | 31.50 | 31.88 | 1.240 | 1.255 |
| B | 7.80 | 8.20 | 0.307 | 0.323 |
| C | 4.09 | 4.29 | 0.161 | 0.169 |
| D | 4.09 | 4.29 | 0.161 | 0.169 |
| E | 4.09 | 4.29 | 0.161 | 0.169 |
| F | 14.91 | 15.11 | 0.587 | 0.595 |
| G | 30.12 | 30.30 | 1.186 | 1.193 |
| H | 37.80 | 38.23 | 1.489 | 1.505 |
| J | 11.68 | 12.22 | 0.460 | 0.481 |
| K | 8.92 | 9.60 | 0.351 | 0.378 |
| L | 0.76 | 0.84 | 0.030 | 0.033 |
| M | 12.60 | 12.85 | 0.496 | 0.506 |
| N | 25.15 | 25.42 | 0.990 | 1.001 |
| O | 1.98 | 2.13 | 0.078 | 0.084 |
| P | 4.95 | 5.97 | 0.195 | 0.235 |
| Q | 26.54 | 26.90 | 1.045 | 1.059 |
| R | 3.94 | 4.42 | 0.155 | 0.174 |
| S | 4.72 | 4.85 | 0.186 | 0.191 |
| T | 24.59 | 25.07 | 0.968 | 0.987 |
| U | -0.05 | 0.1 | -0.002 | 0.004 |
| V | 3.30 | 4.57 | 0.130 | 0.180 |
| W | 0.780 | 0.830 | 19.81 | 21.08 |

IXYS reserves the right to change limits, Conditions and dimensions.

© 2004 IXYS All rights reserved