

SHINDENGEN

General Purpose Rectifiers

SMT Bridges

S1WB(A)20

200V 1A


FEATURES

- Small SMT
- High IFSM
- Applicable to Automatic Insertion

APPLICATION

- Switching power supply
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

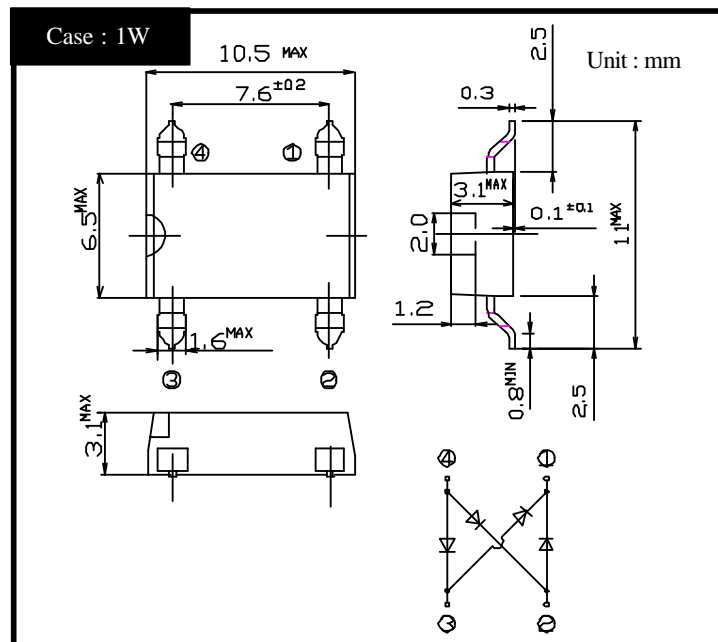

RATINGS


• Absolute Maximum Ratings (If not specified $T_l=25^{\circ}\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40 ~ 150	$^{\circ}\text{C}$
Operating Junction Temperature	T_j		150	$^{\circ}\text{C}$
Maximum Reverse Voltage	V_{RM}		200	V
Average Rectified Forward Current	I_{FRM}	50Hz sine wave, R-load, $T_a=25^{\circ}\text{C}$	1	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value @ $T_j=25^{\circ}\text{C}$	30	A
Current Squared Time	I^2t	1ms...t•f 10ms•@ $T_j=25^{\circ}\text{C}$	4.5	A^2s


• Electrical Characteristics (If not specified $T_l=25^{\circ}\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=0.5\text{A}$, Pulse measurement, Rating of per diode	Max.1.0	V
Reverse Current	I_R	$V_R=V_{RM}$ Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	f/θ_{j-l}	junction to lead	Max.10	$^{\circ}\text{C}/\text{W}$
	f/θ_{j-a}	junction to ambient	Max.65	$^{\circ}\text{C}/\text{W}$

S1WB(A)x Forward Voltage

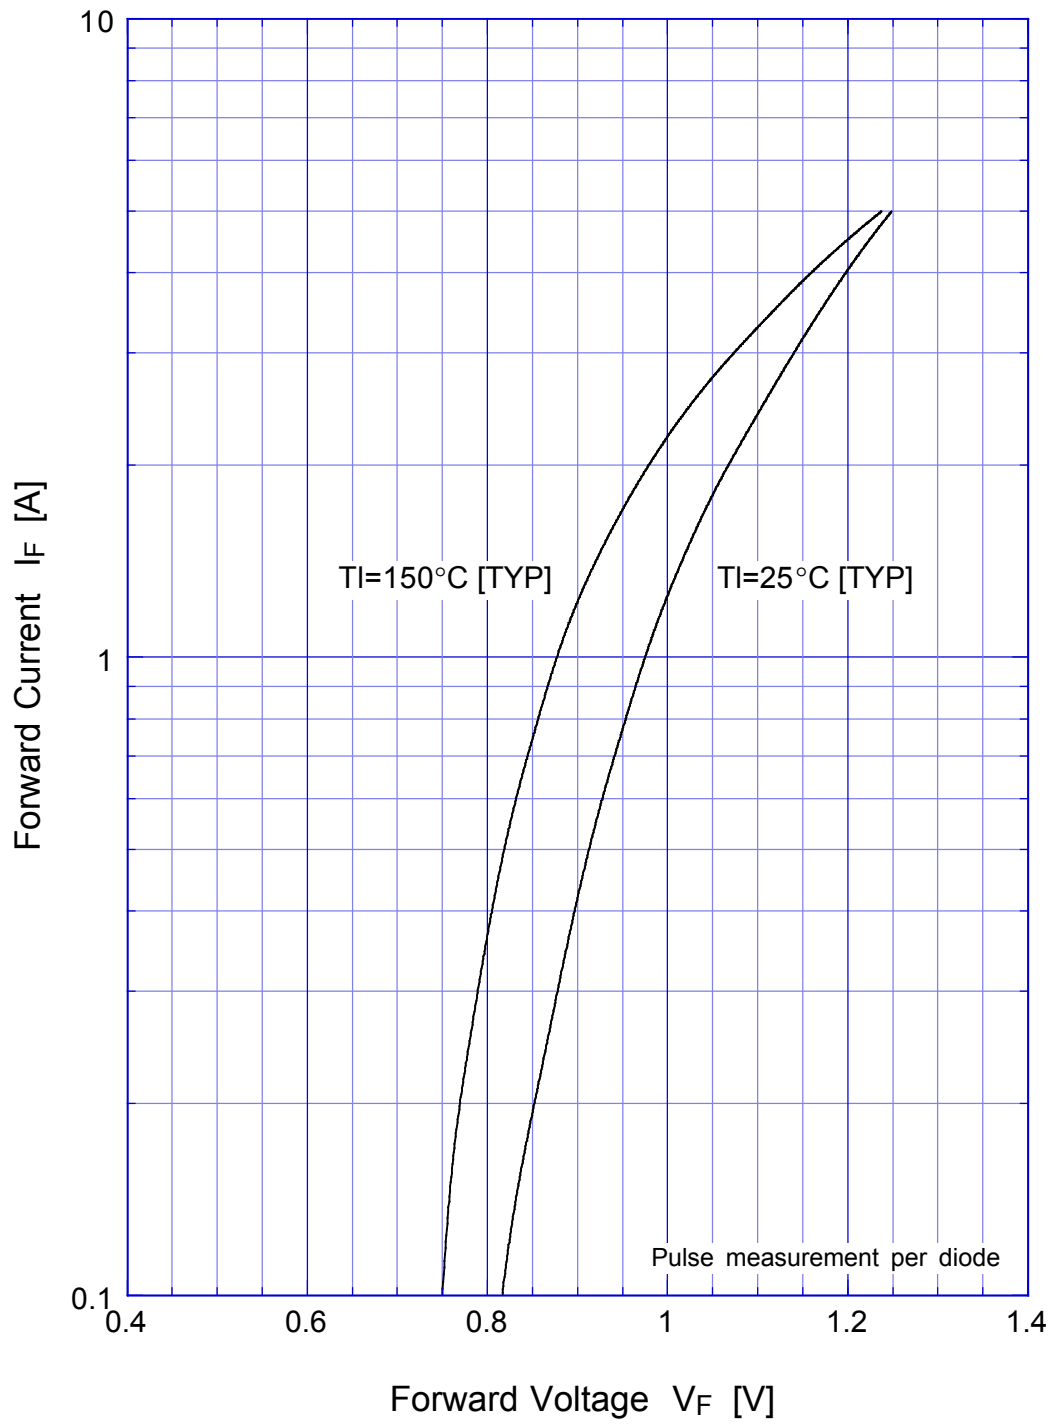


S1WB(A)x Forward Power Dissipation

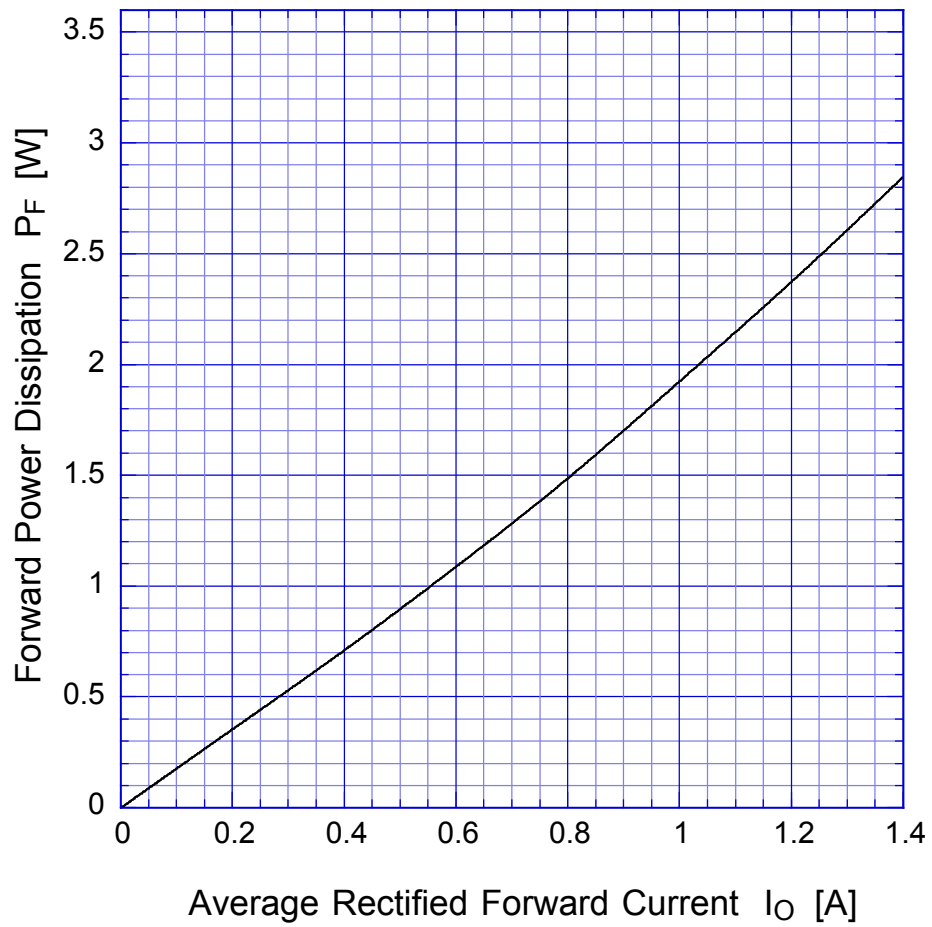

$T_j = 150^\circ\text{C}$
Sine wave

S1WB(A)x

Derating Curve

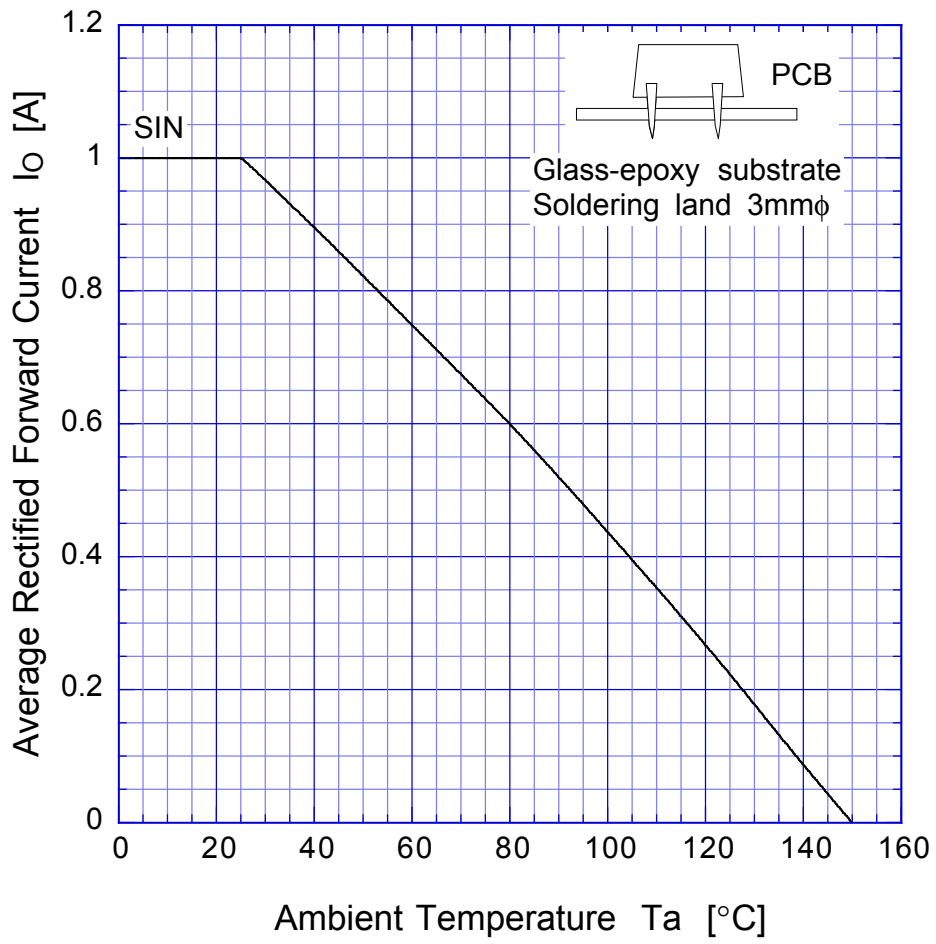

Sine wave
R-load
Free in air

S1WB(A)x Peak Surge Forward Capability

