CMA-40-2606 Power Amplifier 26 GHz - 40 GHz

This Power Amplifier offers exceptional performance over the band 26 GHz to 40 GHz with 13(5) dBm P1dB output power and 25 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.



Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

.....

Specifications:

Model Number: CMA-40-2606 Frequency Range: 26 GHz - 40 GHz Gain (min): 25 dB Gain Vs Temp at any Frequency: This Amplifier is not Temperature Compensated Noise Figure (max): 9 dB Output Power @ 1dB Compression: 13(5) dBm Gain Flatness Vs Frequency: +/-1.50 dB3rd Order Intercept (Typ): 19 dBm Power Supply: Input Voltage: 11.5 to 15 VDC Current @ 12 VDC (typ): 400 mA Current @ 12 VDC (max): Contact Factory Case Type (See attached Outline): SK6 Temperature Range: +25




ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com

CMA-40-2606

Power Amplifier

26 GHz - 40 GHz

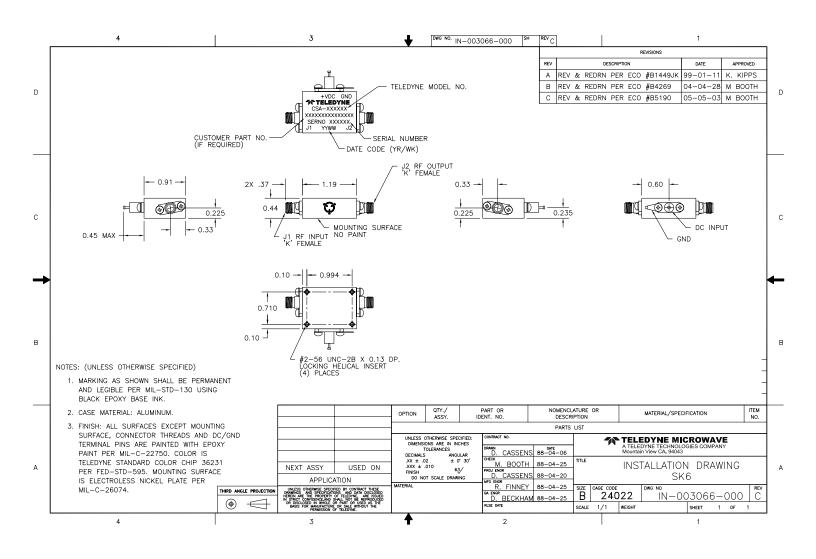

TELEDYNE MICROWAVE

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com

All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product