

LEA-5T

u-blox 5 GPS receiver with Precision Timing

Product description

The LEA-5T supports precision GPS timing for demanding positioning applications such as femto cells and WiMAX base-stations. It features a time mode function whereby the GPS receiver assumes a stationary 3D position, whether programmed manually or determined by an initial self-survey. Stationary operation enables GPS timing with only one visible satellite and eliminates timing errors which otherwise result in positioning errors. An accuracy of up to 15 ns is achievable by using the quantization error information to compensate the granularity of the time pulse. A built-in time mark and counter unit provide precise time measurement of external event inputs.



22.4 x 17 x 3 mm

Highlights


- 50-channel u-blox5 engine with over 1 million effective correlators
- < 1 second Time-To-First-Fix for hot and aided starts
- SuperSense® indoor GPS with best-in-class acquisition and tracking sensitivity
- Supports AssistNow Online A-GPS service; OMA SUPL compliant
- Hybrid GPS, GALILEO and SBAS (WAAS, EGNOS, MSAS, GAGAN) engine
- Stationary mode for GPS timing operation
- Output timepulse with at least one satellite in view

Features

Series	Power	Size	Memory	Function				Antenna		Input / Output						
	Voltage range [V]	Thickness [mm]	Programmable (Flash) FW update	Power Save mode	KickStart	Dead Reckoning	Raw data	Precision Timing	Antenna supply	Antenna supervisor	UART	USB	SPI	DDC (I ² C compliant)	Reset input	Configuration pin
LEA-5T	2.7 - 3.6	3		P	•		•	•	•	•	1	1	1	•		

P = Planned

Mechanical data

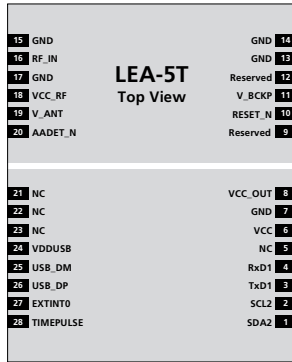

Dimensions
22.4 x 17 x 3 mm

Weight
2.1 g

Electrical data

Power supply	2.7 to 3.6V
Power consumption	129 mW @ 3.0V Eco mode 135 mW @ 3.0V Max. Performance mode
Backup power	1.4 V to 3.6 V, 25 μ A
Antenna type	Active and passive
Antenna power	External or internal VCC_RF
Antenna supervision	Integrated short-circuit detection and antenna shutdown, open circuit detection is supported with AADET_N input and little external circuitry

Timer performance data

Timing accuracy	RMS	30 ns
	99%	< 60 ns
	Granularity	21 ns
	Compensated	15 ns ¹
Time pulse	Configurable	0.25 to 1000 Hz
Time mark / Counter	# of Inputs	1

¹ Quantization error information can be used to compensate the granularity related error of the time pulse signal

Ordering information

LEA-5T-0 u-blox 5 Precision Timing GPS Module

Available as samples and tape on reel (250 pieces)

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.

Copyright © 2009, u-blox AG

Interfaces

Serial interfaces	1 UART 1 USB V2.0 full speed 12 Mbit/s 1 DDC (I ² C compliant)
Digital I/O	Configurable time pulse 1 EXTINT input 1 reset
Serial and I/O voltages	2.7 to 3.6V
Protocols	NMEA, UBX binary

Receiver performance data

Receiver type	50-channel u-blox 5 engine GPS L1 C/A code SBAS: WAAS, EGNOS, MSAS, GAGAN	
Accuracy ²	Position	2.5 m CEP
	SBAS	2.0 m CEP
Acquisition ²	Cold starts:	29 s
	Warm starts:	29 s
	Aided starts ³ :	< 1 s
	Hot starts:	< 1 s
Sensitivity ⁴	Cold starts:	-144 dBm
	Reacquisition:	-160 dBm
	Tracking:	-160 dBm
Multipath suppression	Intelligent multipath detection and suppression	
A-GPS	Supports AssistNow Online and AssistNow Offline, OMA SUPL compliant	
Operational limits	Velocity:	500 m/s (972 knots)
	Altitude:	50,000 m
Operating temp.	-40°C to 85°C	
Storage temp.	-40°C to 85°C	

² All SV @ -130 dBm

³ Dependent on aiding data connection speed and latency

⁴ Demonstrated with a good active antenna

Support products

EVK-5T u-blox 5 Evaluation Kit with Precision Timing

Contact us

HQ Switzerland
+41 44 722 7444
info@u-blox.com

EMEA
+41 44 722 7477
info@u-blox.com

Americas
+1 703 483 3180
info_us@u-blox.com

APAC – Singapore
+65 6734 3811
info_ap@u-blox.com

China
+86 10 68 133 545
info_cn@u-blox.com

Japan
+81 3 5775 3850
info_jp@u-blox.com

Korea
+82 02 542 0861
info_kr@u-blox.com

Taiwan
+886 2 2657 1090
info_tw@u-blox.com