


### MATERIAL


Insulator: P.B.T. 30% Glass Fiber (UL 94V-0).  
 Contact: Copper Alloy  
 Finish: Gold Flash Over Nickel.

### SPECIFICATION

Current Rating: 3 Amp.  
 Dielectric Withstanding: 1000V AC.  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -55°C ~ +105°C.

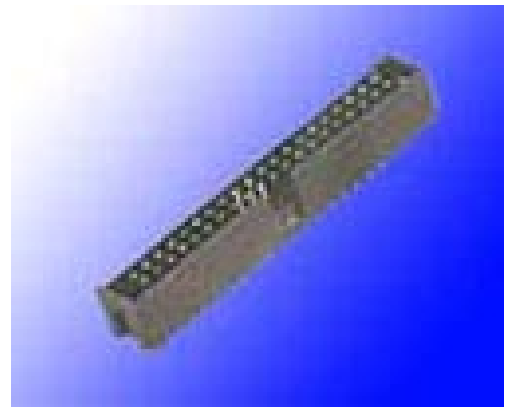





### DIMENSIONS: STRAIGHT

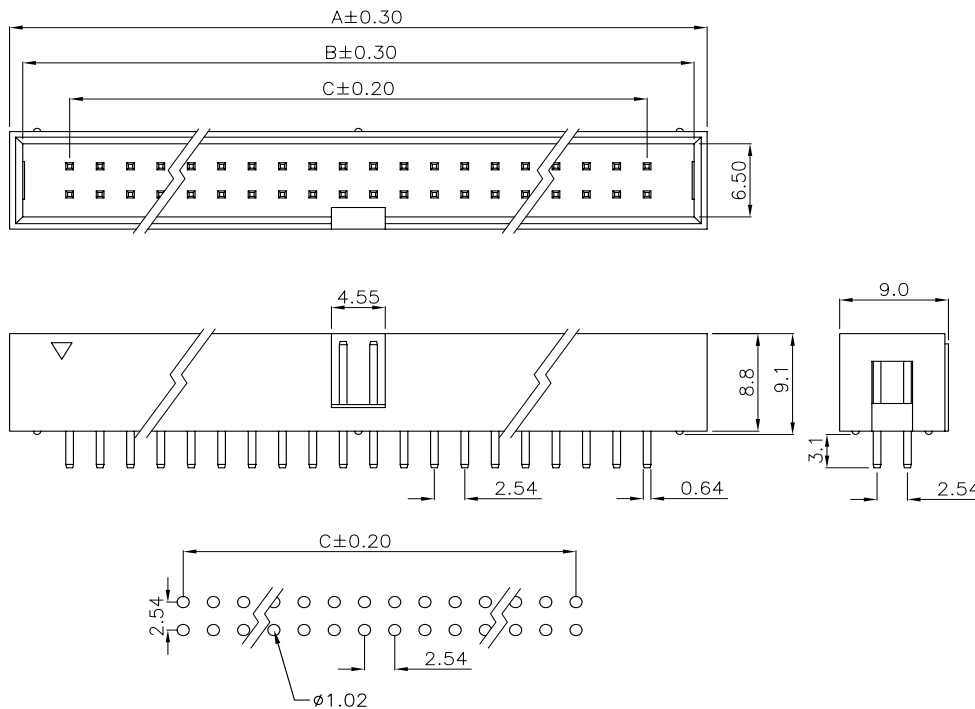

RECOMMEND P.C.B LAYOUT  
TOP VIEW

POSITION	A	B	C
06	15.24	12.94	5.08
08	17.78	15.48	7.62
10	20.32	18.02	10.16
12	22.86	20.56	12.70
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
44	63.50	61.20	53.34
50	71.12	68.82	60.96
60	83.82	82.51	73.66
64	88.90	86.60	78.74

### DIMENSIONS: RIGHT ANGLE

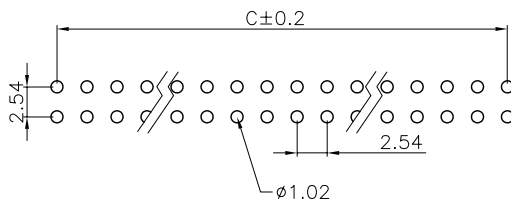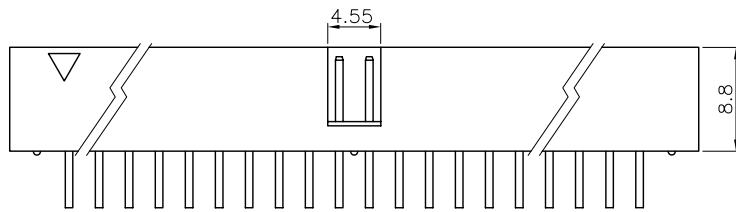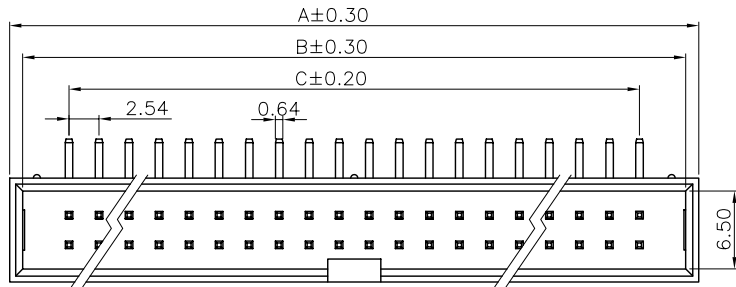

RECOMMEND P.C.B LAYOUT  
TOP VIEW

POSITION	A	B	C
06	15.24	12.94	5.08
08	17.78	15.48	7.62
10	20.32	18.02	10.16
12	22.86	20.56	12.70
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
44	63.50	61.20	53.34
50	71.12	68.82	60.96
60	83.82	82.51	73.66
64	88.90	86.60	78.74

### PART NUMBER

