

## MULTI LAMPS LED BULB

### Data Sheet

**Description:**

These multi lamps LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The top view LED radiation pattern (360°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb. Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

**Feature:**

- Wide view angle
- High luminous output
- Seven kind color
- Solid-state Vibration resistant
- Saving power
- Long life

**Option:**

- 12V to 28V DC
- Other industry standard base

***A-BRIGHT***


A-BRIGHT INDUSTRIAL CO.,LTD.

---

Part No.: AB-18TOPY-12VD-B2G-1

Multi Lamps LED Bulb

PACKAGE DIMENSIONS :

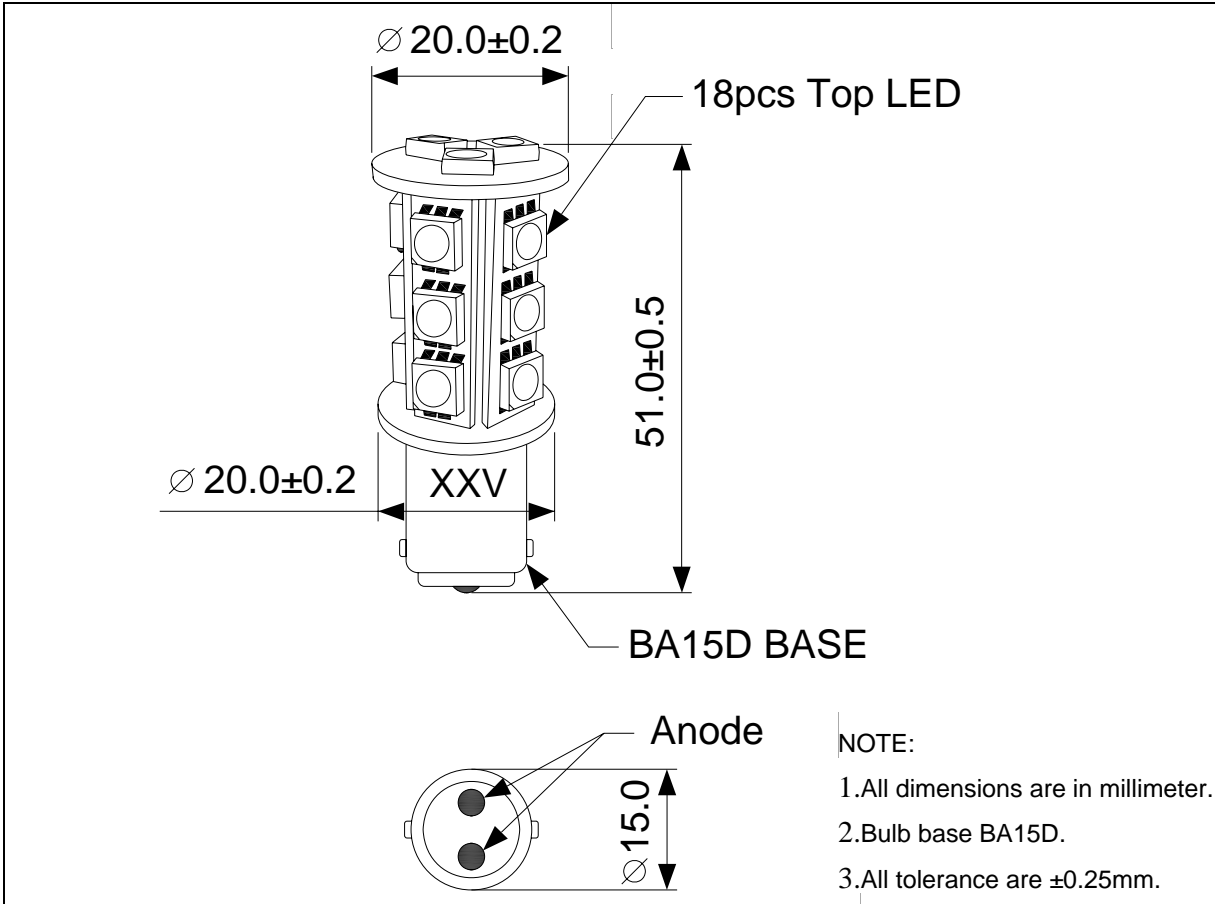

**Part No.: AB-18TOPY-12VD-B2G-1**

**Multi Lamps LED Bulb**

**FEATURE:**

- SUPER LUMINOSITY YELLOW LED (AlGaInP).
- WATER CLEAR PACKAGE.
- 3 CHIPS TOP VIEW LED.
- WIDE VIEWING ANGLE.
- BASE MODEL BA15D.
- ELECTRIC DC.

**MATERIALS:**

- LED LENS: UV RESISTENT EPOXY

**ABSOLUTE MAXIMUM RATING: Ta = 25 °C**

- PEAK OPERATE VOLTAGE..... 14 V
- OPERATING TEMPERATURE..... -25 TO +85°C
- STORAGE TEMPERATURE..... -35 TO +100°C
- LED BULB LIFE..... 50000 HOURS  
(LUMINANCE REDUCES to 50%)

**ABSOLUTE OPTICAL CHARACTERISTIC Ta= 25°C**

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT
Operate Voltage		V	----	12	----	V
Luminous Intensity	IF= 100 mA	Iv	18000	27000	----	mcd
Dominant Wavelength	IF= 100 mA	λd	----	590	----	nm
Spectrum Radiation Bandwidth	IF= 100 mA	Δλ	----	30	----	nm
Forward Current	VIN= 12 V DC	IF	----	100	----	mA
Viewing Angle		2θ1/2	----	360	----	deg