




SERIES KC 1901 SWITCHES

ROTARY SWITCHES

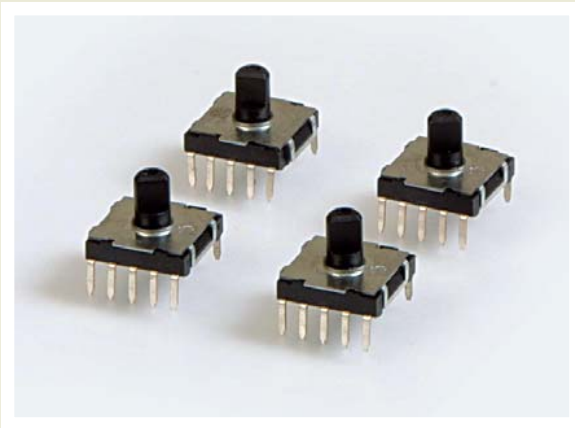

SPECIFICATIONS

Rating:	100 mA @ 16 VDC
Life Expectancy:	10,000 cycles typical
Contact Resistance:	50 mΩ initial @ 2-4 VDC, 100mA
Dielectric Strength:	1,000 max V rms at sea level
Insulation Resistance:	100 MΩ min.
Operating Force:	0.5 N/cm

MATERIALS

Cover:	Stainless steel
Contact:	Silver-plated copper alloy
Terminals:	Silver-plated copper alloy

FEATURES & BENEFITS

- ▶ 9-position rotary
- ▶ Thru-hole termination
- ▶ Positive detents

APPLICATIONS/MARKETS

- ▶ Industrial controls
- ▶ Test & instrumentation
- ▶ Appliance
- ▶ HVAC



HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR LENGTH
KC	1901	N = 7.7mm A = 9.8mm





Example Ordering Number

KC-1901-A



Specifications subject to change without notice.

KC

1901

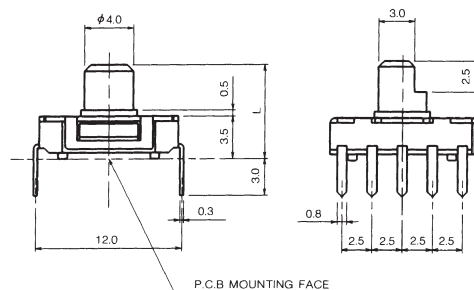

P.C.B MOUNTING FACE

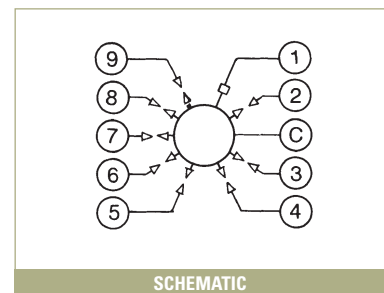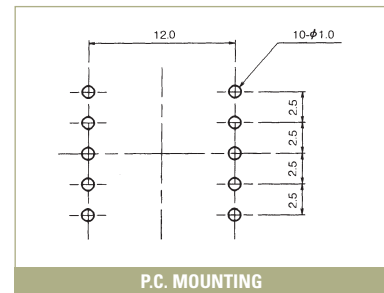

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS