



POSEICO SPA

POwer SEMiconductors Italian COporation

POSEICO SPA  
 Via N. Lorenzi 8, 16152 Genova - ITALY  
 Tel. +39 010 6556234 - Fax +39 010 6557519  
 Sales Office:  
 Tel. +39 010 6556775 - Fax +39 010 6442510

**RECTIFIER DIODES MODULE**

**ADD500**

- \*Full ermetic packaging
- \*Industrial compatible packaging
- \*Insulation using AlN substrate
- \*6KVrms insulation voltage available on request
- \*Contact screws available on request

Repetitive voltage up to **3300 V**  
 Mean on-state current **535 A**  
 Surge current **10.3 kA**

**FINAL SPECIFICATION**

mar 01 - ISSUE : 03

Symbol	Characteristic	Conditions	T <sub>j</sub> [°C]	Value	Unit
<b>BLOCKING</b>					
V <sub>RRM</sub>	Repetitive peak reverse voltage		150	3300	V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage		150	3400	V
I <sub>RRM</sub>	Repetitive peak reverse current		150	50	mA
<b>CONDUCTING</b>					
I <sub>F(AV)</sub>	Mean on-state current	180° sin, 50Hz, T <sub>c</sub> =100°C		535	A
I <sub>F(AV)</sub>	Mean on-state current	180° sin. 50Hz, T <sub>c</sub> =55°C		815	A
I <sub>FSM</sub>	Surge on-state current	sine wave, 10 ms	150	10.3	kA
I <sup>2</sup> t	I <sup>2</sup> t	without reverse voltage		530 x1E3	A <sup>2</sup> s
V <sub>F</sub>	On-state voltage	On-state current = 1600 A	150	1.97	V
V <sub>F(TO)</sub>	Threshold voltage		150	0.89	V
r <sub>F</sub>	On-state slope resistance		150	0.675	mohm
<b>MOUNTING</b>					
R <sub>th(j-c)</sub>	Thermal impedance	Junction to case, per element		50	°C/kW
R <sub>th(c-h)</sub>	Thermal impedance	Case to heatsink, per element		20	°C/kW
T <sub>j</sub>	Operating junction temperature			-30 / 150	°C
V <sub>ins</sub>	RMS insulation voltage	50Hz, circuit to base,all terminal shorted	25	4500(*)	V
T	Mounting torque	Case to heatsink		4 to 6	Nm
		Busbars to terminals		12 to 18	Nm
	Mass			1500	g


ORDERING INFORMATION : ADD500 S 33  
 standard specification  VRRM/100

(\*) 6000V available on request.  
 Add HVI to the desired code in  
 phase of order, i.e. ADD500S33HVI


**DISSIPATION CHARACTERISTICS**

**SQUARE WAVE**

**Tcase [°C]**

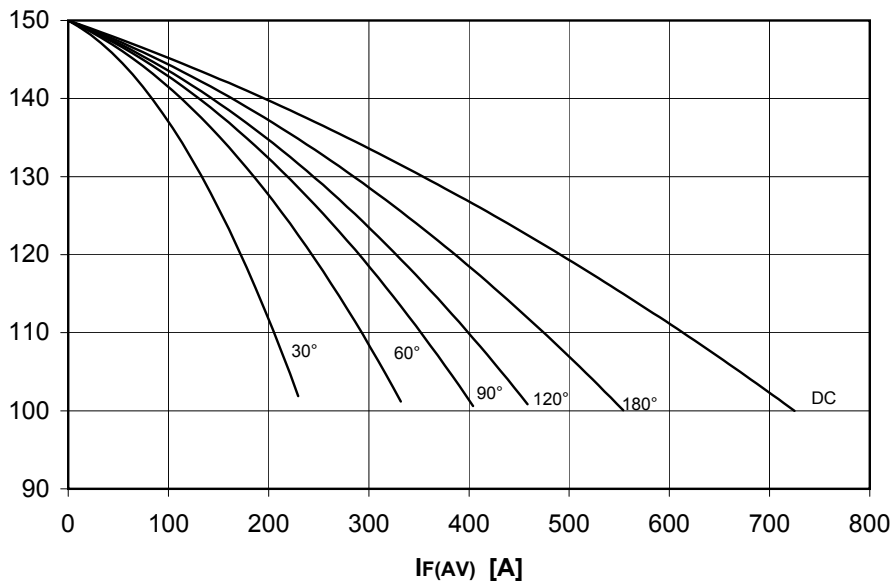


**PF(AV) [W]**

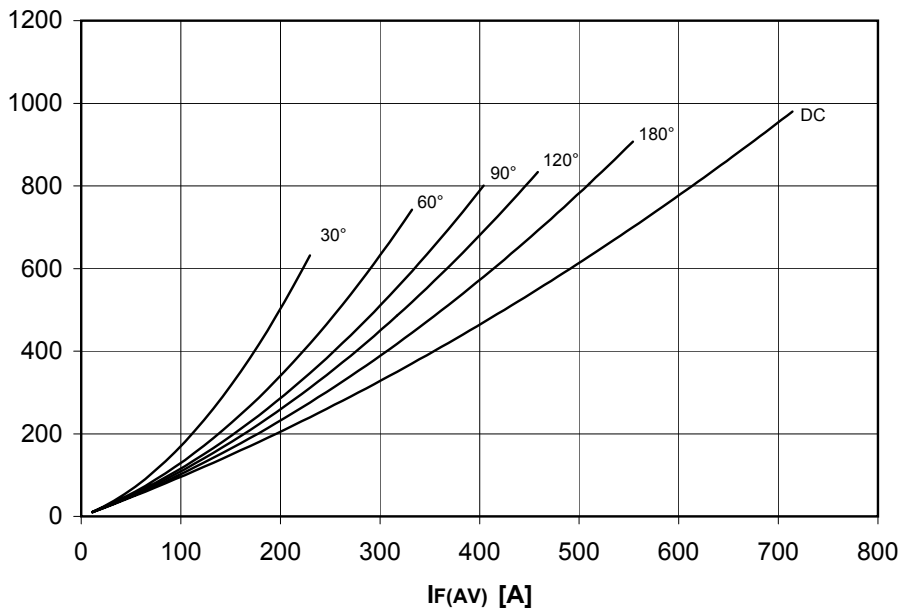


## DISSIPATION CHARACTERISTICS

SINE WAVE

T<sub>case</sub> [°C]

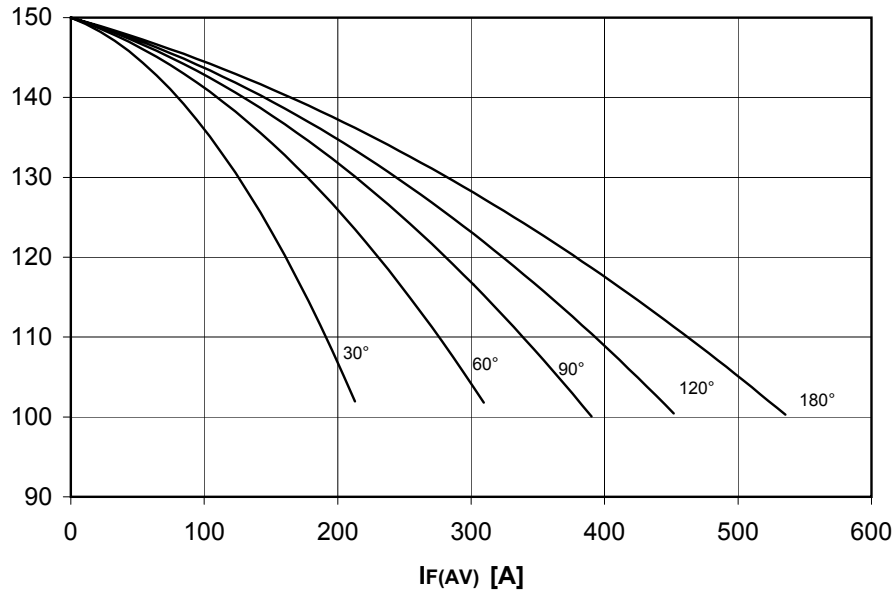

PF(AV) [W]

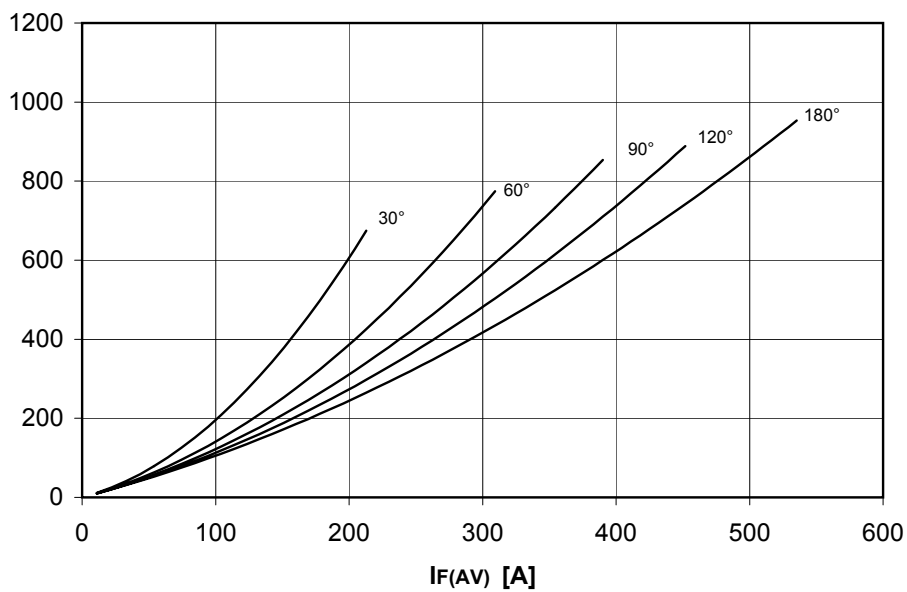


# ADD500 RECTIFIER DIODES MODULE




FINAL SPECIFICATION mar 01 - ISSUE : 03



ON-STATE CHARACTERISTIC  
T<sub>j</sub> = 150 °C

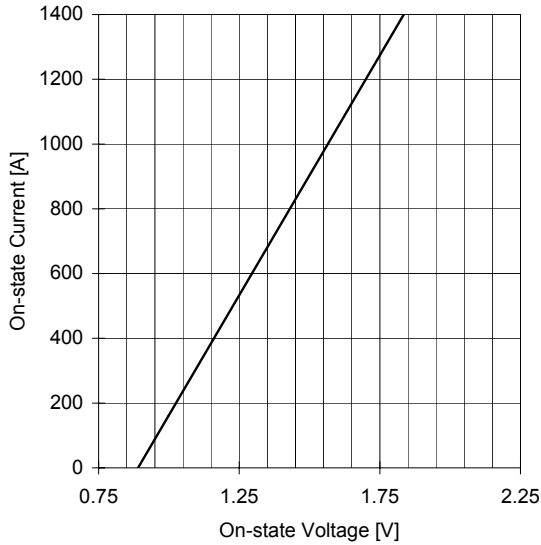

SURGE CHARACTERISTIC  
T<sub>j</sub> = 150 °C

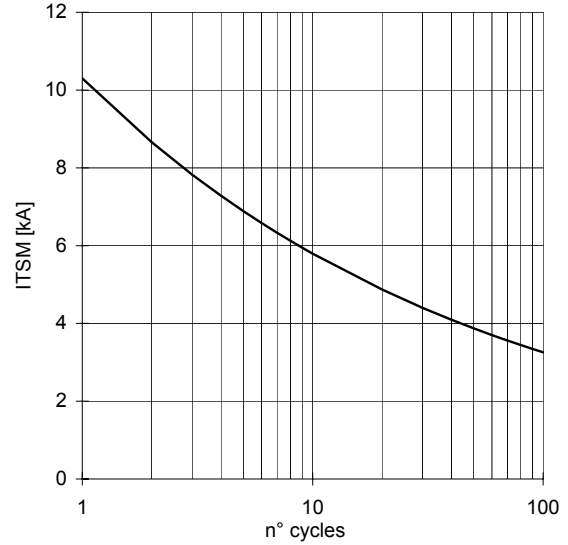

TRANSIENT THERMAL IMPEDANCE

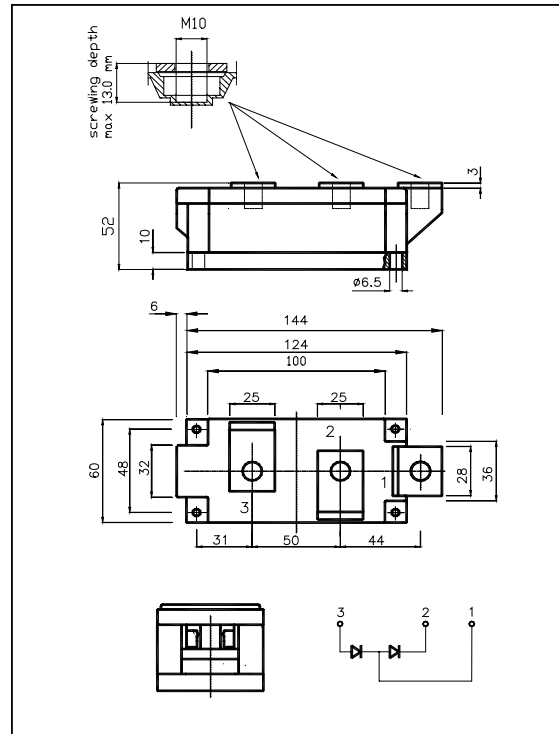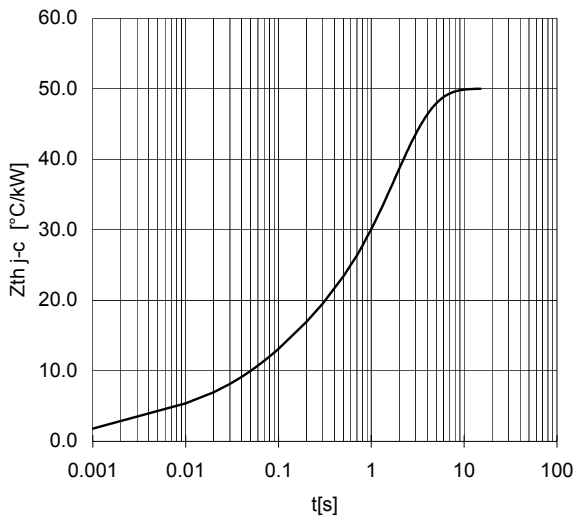

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm.  
In the interest of product improvement POSEICO SPA reserves the right to change any data given in this data sheet at any time without previous notice.  
If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

