

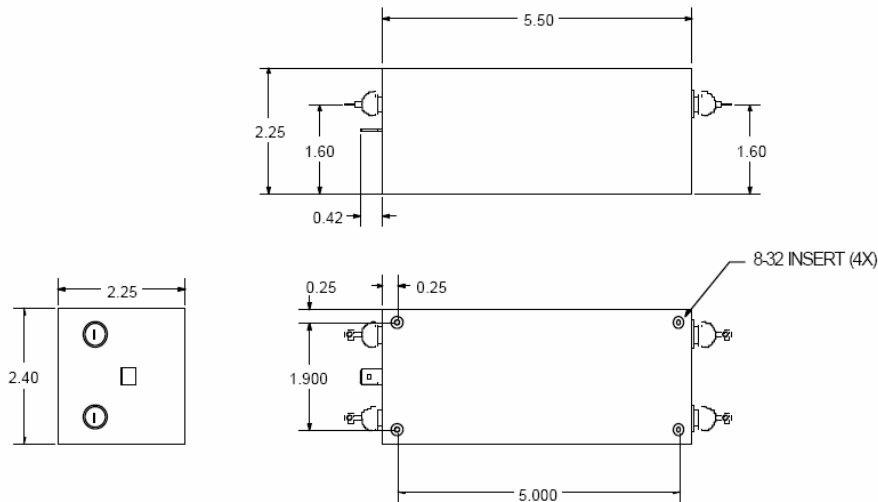


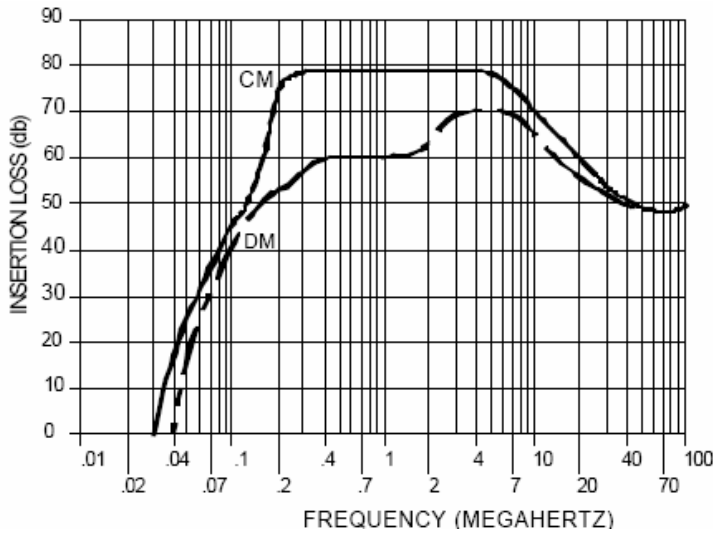

CC-1448-12

Operating Voltage = 250 Vac or Vdc @75oC
Operating Voltage = 125 Vac or Vdc @100oC
Operating Current (Max) = 12 AMP A/C or D/C
MTBF = 193,954 hours GB
Frequency = DC—60 HZ
Temp range (Storage) = -40 to 125oC
Temp range (Operating) @ 12.0 AMP= -65—100oC
Dielectric Withstand voltage (Ph—Case) = 1500 Vac
Dielectric Withstand voltage (Ph—Ph) = 1500 Vdc
Leakage current @ 250 V~, 60 HZ = 2.5 MA max.
Discharge Voltage after 60 sec = 34 V max.
Weight = 1300 gram / 2.9 lb.
Hermetically sealed
Order p/n: CC-1448-12

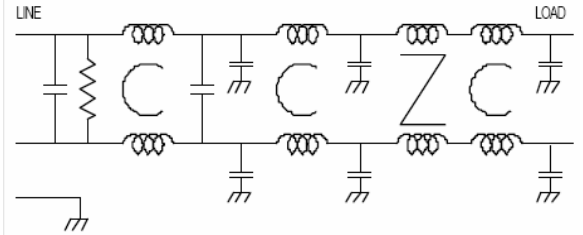

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884