



PT1275 Series

Specifications:

Parameters	Units	PT1275ANP
Min Sound Pressure Level at 10cm	dBA	80
Rated Voltage	V _{pp}	12
Max Operating Voltage	V _{pp}	30
Resonance Frequency	Hz	4500
Capacitance at 120Hz	pF	6000 ± 30%
Operating Temperature	°C	-20 ~ +70
Case Material	-	Noryl
Weight	g	2.0

Unit: mm • Tolerance: $\pm 0.5\text{mm}$ 


► Value applying rated voltage and resonance frequency

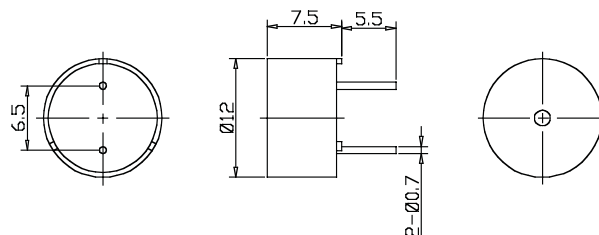


PT1360 Series

Specifications:

Parameters	Units	PT1360AHP
Min Sound Pressure Level at 10cm	dBA	75
Rated Voltage	Vrms	3
Max Operating Voltage	Vp-p	30
Resonance Frequency	Hz	4000
Capacitance at 1000Hz	pF	12000
Operating Temperature	°C	-20 ~ +70
Case Material	-	PBT
Weight	g	0.65

Unit: mm • Tolerance: $\pm 0.5\text{mm}$ 

► Value applying rated voltage and resonance frequency

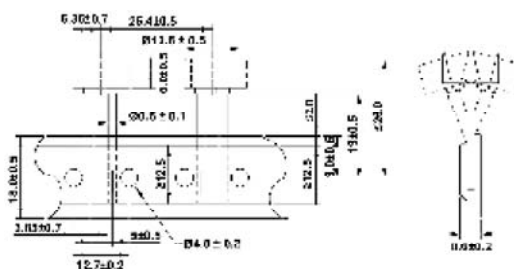

PT1372 Series

Specifications:

Parameters	Units	PT1372AHP
Min Sound Pressure Level at 10cm	dBA	80
Rated Voltage	V _{pp}	5
Max Operating Voltage	V _{pp}	30
Resonance Frequency	Hz	4000
Capacitance at 120Hz	pF	14000 ± 30%
Operating Temperature	°C	-20 ~ +60
Case Material	-	PBT
Weight	g	1.0

Unit: mm • Tolerance: $\pm 0.5\text{mm}$ 

► Value applying rated voltage and resonance frequency

