

PT1325 Series


Specifications:

Parameters	Units	PT1325AAW
▶ Min Sound Pressure Level at 10cm	dBA	80
Rated Voltage	V _{pp}	10
Max Operating Voltage	V _{pp}	30
Resonance Frequency	Hz	4800
Capacitance at 120Hz	pF	15000 ± 30%
Operating Temperature	°C	-20 - +60
Case Material	-	ABS
Weight	g	1.0



Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage and resonance frequency

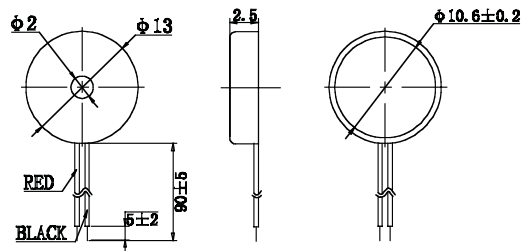

PT1468 Series


Specifications:

Parameters	Units	PT1468ANP
▶ Min Sound Pressure Level at 10cm	dBA	80
Rated Voltage	V _{pp}	5
Max Operating Voltage	V _{pp}	20
Resonance Frequency	Hz	4000
Capacitance at 120Hz	pF	13000 ± 30%
Operating Temperature	°C	-20 - +70
Case Material	-	Noryl
Weight	g	1.0



Unit: mm • Tolerance: ±0.5mm


▶ Value applying rated voltage and resonance frequency

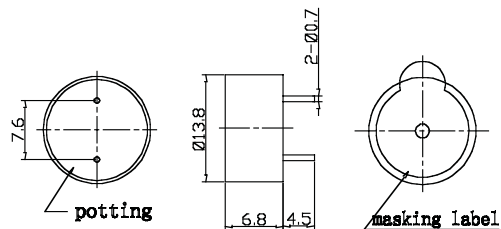

PT1440 Series

Specifications:

Parameters	Units	PT1440ANW
▶ Min Sound Pressure Level at 10cm	dBA	85
Rated Voltage	V _{pp}	10
Max Operating Voltage	V _{pp}	30
Resonance Frequency	Hz	4800
Capacitance at 120Hz	pF	15000 ± 30%
Operating Temperature	°C	-20 - +70
Case Material	-	Noryl
Weight	g	1.0

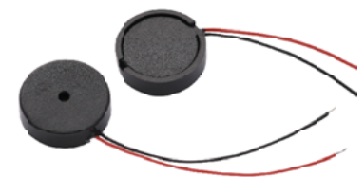

Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage and resonance frequency

