

Features

- Frequency Range 1200 – 1600 MHz
- Low Cost
- Industry Standard SMT package
- Available in Tape-and -Reel
- 50 Ohms Characteristic Impedance

Description

The SPC-1601-25 is a 0° In-phase two way power splitter designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems. S-Parameters are available on request.

SURFACE MOUNT 2-WAY SPLITTER



Specifications


Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1200		1600
Insertion Loss (dB)		0.4	1.0
Isolation (dB)	10	15	
Return Loss (dB)		11	9.8
Amplitude Balance (dB)		0.1	0.5
Phase Balance (Degrees)		2.0	5.0

Absolute Maximum Ratings


Parameter	Maximum
RF Power	+33 dBm
Operating Temperature	-55 to +100 °C
Storage Temperature	-55 to +100 °C
Re-flow Temperature	+ 240 °C

Note: Typical values represent Mid-band performance @ 25°.

Schematic

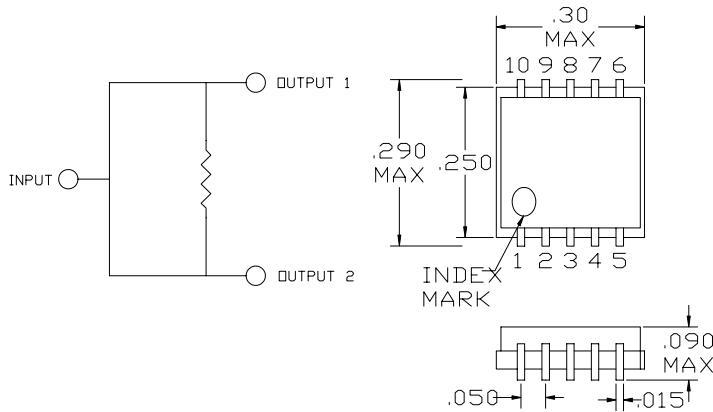


Package – S10

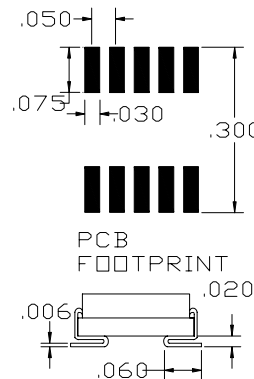


Pin Functions

Function	Pin
INPUT	3
OUTPUT 1	10
OUTPUT 2	6
GROUND	1,2,4,5,7,8,9

Typical Test Data – Insertion Loss and Amplitude Balance

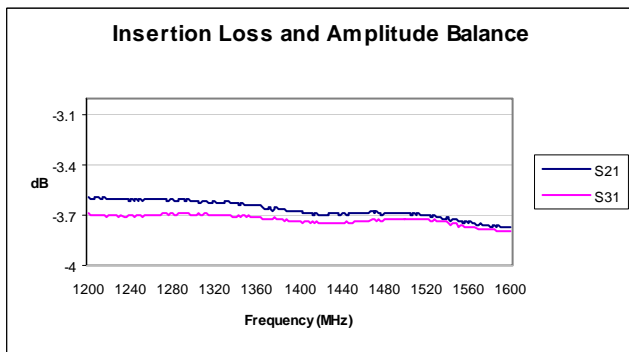

Typical Test Data –Return Loss and Output Isolation

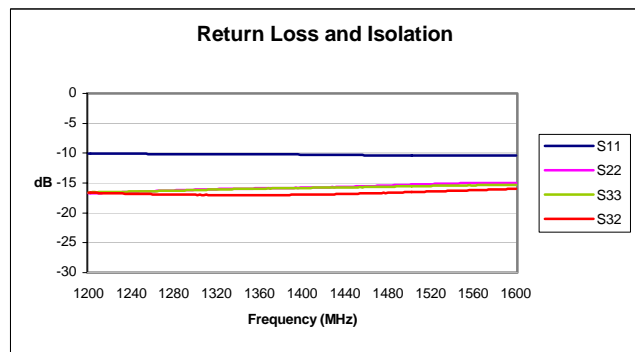

Specifications and information on this data sheet are subject to change without notice..

1860 Hartog Drive, San Jose, California 95131 USA
 Leffelholzstr. 20, D-90441, Nurnberg, Germany
 2/1-2F, No.99 Lane 2535 Gudai Rd, Shanghai, China PC 201100

Tel: 001-408-436-7720
 Tel: +49(0)911/9411 233
 Tel: (86)21-5416-8648

Fax: 001-408-436-7689
 Fax: +49(0)911/9411 198
 Fax: (86)21-5416-8753

Email: Sales@premierdevices.com
 Email: Sales.germany@premierdevices.com
 Email: Sales.china@premierdevices.com