


## MTS8528 Series


Specifications:

Parameters	Units	MTS8528A03LM
▶ Min Sound Pressure Level at 10cm	dBa	82
Rated Voltage	V <sub>o-p</sub>	3
Operating Voltage	V <sub>o-p</sub>	2 - 4
Resonance Frequency	Hz	2731
▶ Max Operating Current	mA	80
Coil Resistance	Ω	1.5 ± 3
Operating Temperature	°C	-30 - +85
Case Material	-	LCP
Weight	g	0.6



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)


Unit: mm • Tolerance: ±0.5mm

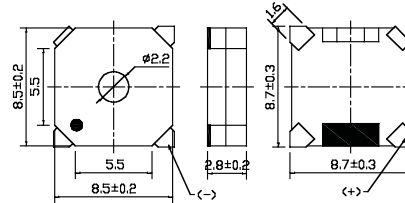

## MTS8528G Series


Specifications:

Parameters	Units	MTS8528GA04LM
▶ Min Sound Pressure Level at 10cm	dBa	85
Rated Voltage	V <sub>o-p</sub>	3.6
Operating Voltage	V <sub>o-p</sub>	2 - 4
Resonance Frequency	Hz	2731
▶ Max Operating Current	mA	90
Coil Resistance	Ω	1.6 ± 3
Operating Temperature	°C	-30 - +85
Case Material	-	LCP
Weight	g	0.6



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)


Unit: mm • Tolerance: ±0.5mm

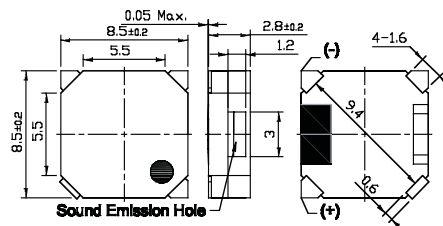

## MTS8530 Series

Specifications:

Parameters	Units	MTS8530A04LM
▶ Min Sound Pressure Level at 10cm	dBa	85
Rated Voltage	V <sub>o-p</sub>	3.6
Operating Voltage	V <sub>o-p</sub>	2 - 4.5
Resonance Frequency	Hz	2731
▶ Max Operating Current	mA	100
Coil Resistance	Ω	1.6 ± 3
Operating Temperature	°C	-30 - +85
Case Material	-	LCP
Weight	g	0.6



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

Unit: mm • Tolerance: ±0.5mm

