


## MTS1430 Series


Specifications:

Parameters	Units	MTS1430A03LM
▶ Min Sound Pressure Level at 10cm	dBa	87
Rated Voltage	V <sub>o-p</sub>	3
Operating Voltage	V <sub>o-p</sub>	2 - 4
Resonance Frequency	Hz	3200
▶ Max Operating Current	mA	80
Coil Resistance	Ω	18 ± 3
Operating Temperature	°C	-30 - +85
Case Material	-	LCP
Weight	g	1.0



Unit: mm • Tolerance: ±0.5mm


▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

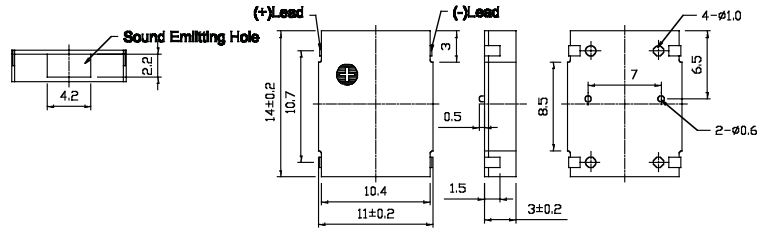

## MTS1430G Series

Specifications:

Parameters	Units	MTS1430GA05LM
▶ Min Sound Pressure Level at 10cm	dBa	90
Rated Voltage	V <sub>o-p</sub>	5
Operating Voltage	V <sub>o-p</sub>	3 - 7
Resonance Frequency	Hz	2731
▶ Max Operating Current	mA	80
Coil Resistance	Ω	30 ± 3
Operating Temperature	°C	-30 - +85
Case Material	-	LCP
Weight	g	1.0



Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

