


MTS8532 Series


Specifications:

| Parameters | Units | MTS8532A03LM |
|------------------------------------|------------------|--------------|
| ▶ Min Sound Pressure Level at 10cm | dBa | 85 |
| Rated Voltage | V _{o-p} | 3 |
| Operating Voltage | V _{o-p} | 2 - 4 |
| Resonance Frequency | Hz | 2731 |
| ▶ Max Operating Current | mA | 80 |
| Coil Resistance | Ω | 15 ± 3 |
| Operating Temperature | °C | -30 - +85 |
| Case Material | - | LCP |
| Weight | g | 0.6 |



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)


Unit: mm • Tolerance: ±0.5mm

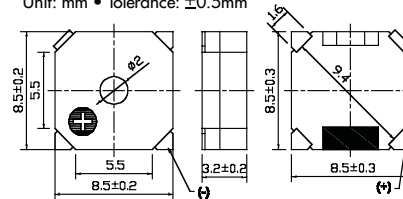

MTS8535 Series


Specifications:

| Parameters | Units | MTS8535A03LM |
|------------------------------------|------------------|--------------|
| ▶ Min Sound Pressure Level at 10cm | dBa | 85 |
| Rated Voltage | V _{o-p} | 3 |
| Operating Voltage | V _{o-p} | 2 - 4.5 |
| Resonance Frequency | Hz | 2731 |
| ▶ Max Operating Current | mA | 80 |
| Coil Resistance | Ω | 15 ± 3 |
| Operating Temperature | °C | -30 - +85 |
| Case Material | - | LCP |
| Weight | g | 0.6 |



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)


Unit: mm • Tolerance: ±0.5mm

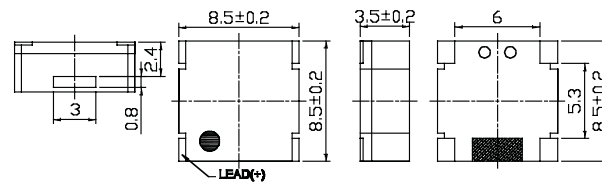

MTS8540 Series

Specifications:

| Parameters | Units | MTS8540A04LM | MTS8540A05LM |
|------------------------------------|------------------|--------------|--------------|
| ▶ Min Sound Pressure Level at 10cm | dBa | 88 | 88 |
| Rated Voltage | V _{o-p} | 3.6 | 5 |
| Operating Voltage | V _{o-p} | 2 - 4.5 | 4 - 7 |
| Resonance Frequency | Hz | 2731 | 2731 |
| ▶ Max Operating Current | mA | 90 | 80 |
| Coil Resistance | Ohm | 16 ± 3 | 40 ± 3 |
| Operating Temperature | °C | -30 - +85 | -30 - +85 |
| Case Material | - | LCP | LCP |
| Weight | g | 0.6 | 0.6 |



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

Unit: mm • Tolerance: ±0.5mm

