

Thermal Print Heads Printer with Card Reader/Writer installed

BHC4270SE

FEATURES

- · Slim series with a light and compact end-face head
- No heat history control type
- · Straight path
- New-BP protective layer with excellent abrasion resistance is used.

APPLICATIONS

- · Printers with a card reader/writer installed
- · Rewrite printers
- Other thermal printers which require a straight path

PRODUCT SPECIFICATIONS


HEATING ELEMENT SPECIFICATIONS

Number of heating elements	(dots)	448
Dot density	(dots/mm)	8
	(DPI)	203
Length of heating element array (effective)	(mm)	56
Heating element average resistance	(Ω)	970

DRIVE CONDITIONS

Applied platen diameter	(mm)	Option
Data transfer frequency	(MHz)	5max.
Driver power supply	(V)	4.5 to 5.5

SHAPES AND DIMENSIONS

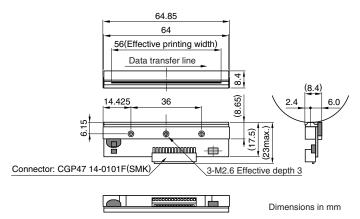

[•] All specifications are subject to change without notice.