

### MT1255G Series


Specifications:

Parameters	Units	MT1255GA01NP
▶ Min Sound Pressure Level at 10cm	dBa	70
Rated Voltage	V <sub>o-p</sub>	1.5
Operating Voltage	V <sub>o-p</sub>	1 - 3
Resonance Frequency	Hz	2048
▶ Max Operating Current	mA	10
Coil Resistance	Ω	50 ± 7.5
Operating Temperature	°C	-20 - +70
Case Material	-	Noryl
Weight	g	2.0



Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

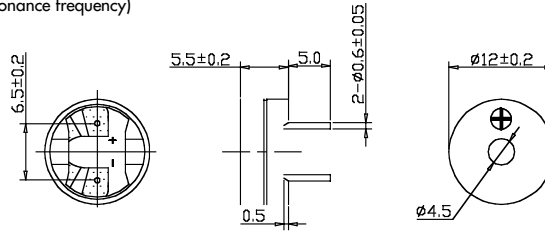

### MT1256 Series


Specifications:

Parameters	Units	MT1256A01PP
▶ Min Sound Pressure Level at 10cm	dBa	75
Rated Voltage	V <sub>o-p</sub>	1.5
Operating Voltage	V <sub>o-p</sub>	1 - 3
Resonance Frequency	Hz	2048
▶ Max Operating Current	mA	30
Coil Resistance	Ω	16 ± 4
Operating Temperature	°C	-20 - +70
Case Material	-	PPS
Weight	g	2.0



Unit: mm • Tolerance: ±0.3mm

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

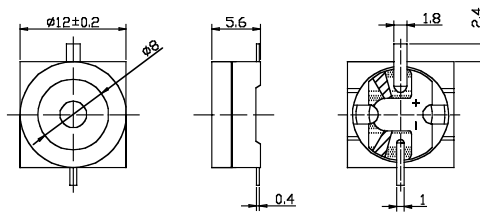

### MT1260 Series

Specifications:

Parameters	Units	MT1260A01NP
▶ Min Sound Pressure Level at 10cm	dBa	88
Rated Voltage	V <sub>o-p</sub>	1.5
Operating Voltage	V <sub>o-p</sub>	1 - 3
Resonance Frequency	Hz	2731
▶ Max Operating Current	mA	70
Coil Resistance	Ω	5 ± 1
Operating Temperature	°C	-40 - +85
Case Material	-	Noryl
Weight	g	2.0



Unit: mm • Tolerance: ±0.3mm

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

