

### MT9671 Series


Specifications:

Parameters	Units	MT9671A01NP
▶ Min Sound Pressure Level at 10cm	dBA	80
Rated Voltage	V <sub>o-p</sub>	1.5
Operating Voltage	V <sub>o-p</sub>	1 - 2
Resonance Frequency	Hz	3100
▶ Max Operating Current	mA	80
Coil Resistance	Ω	5.5 ± 1
Operating Temperature	°C	-20 - +60
Case Material	-	Noryl
Weight	g	0.6



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

Unit: mm • Tolerance: ±0.5mm

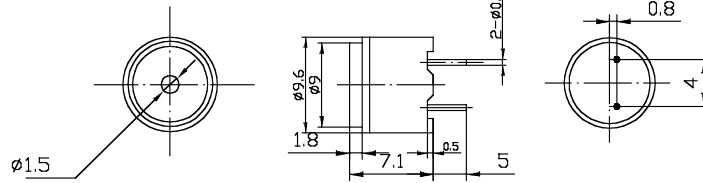

### MT1238 Series


Specifications:

Parameters	Units	MT1238A01NP	MT1238B01NP
▶ Min Sound Pressure Level at 10cm	dBA	75	75
Rated Voltage	V <sub>o-p</sub>	1.5	1.5
Operating Voltage	V <sub>o-p</sub>	1 - 3	1 - 3
Resonance Frequency	Hz	2048	2400
▶ Max Operating Current	mA	40	40
Coil Resistance	Ω	16 ± 4	16 ± 4
Operating Temperature	°C	-20 - +70	-20 - +70
Case Material	-	Noryl	Noryl
Weight	g	2.0	2.0



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

Unit: mm • Tolerance: ±0.5mm

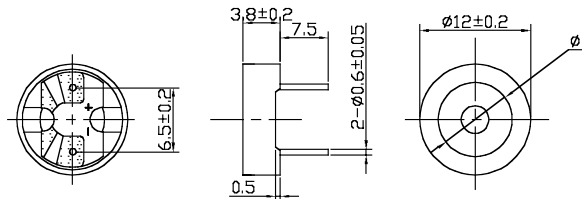

### MT1255 Series

Specifications:

Parameters	Units	MT1255A01NP
▶ Min Sound Pressure Level at 10cm	dBA	75
Rated Voltage	V <sub>o-p</sub>	1.5
Operating Voltage	V <sub>o-p</sub>	1 - 3
Resonance Frequency	Hz	2048
▶ Max Operating Current	mA	30
Coil Resistance	Ω	16 ± 2
Operating Temperature	°C	-20 - +70
Case Material	-	Noryl
Weight	g	2.0



▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

Unit: mm • Tolerance: ±0.5mm

