




## Thermoelectric Cooler


DT3-2.5

### Performance Values

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (°C-dry N <sub>2</sub> ):	65	73
Qmax (watts):	6	6
I <sub>max</sub> (amps):	2.5	2.5
V <sub>max</sub> (vdc):	3.6	4.1
AC Resistance (ohms):	1.2	---

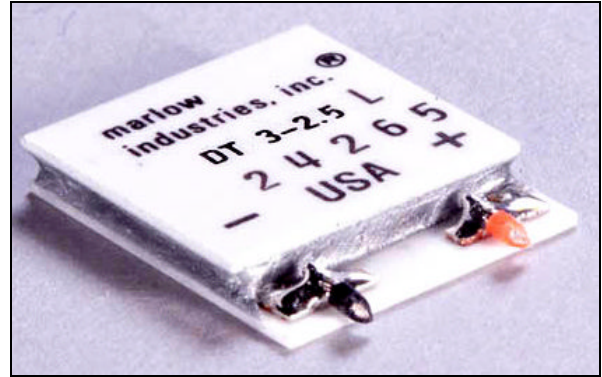

### Mechanical Characteristics

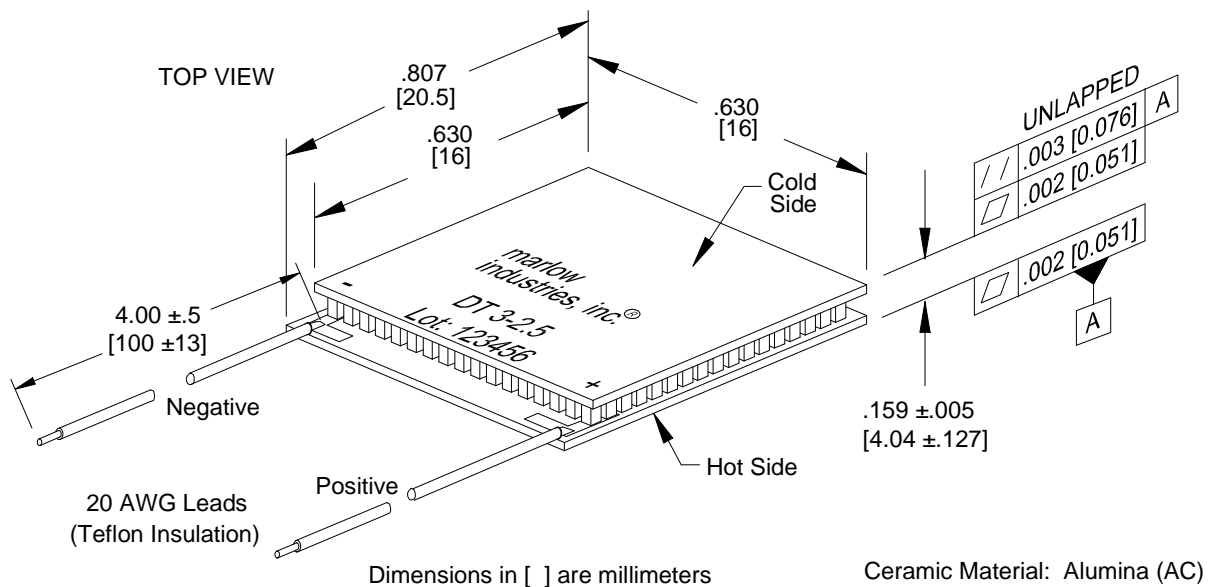

Note: Base model shown

### Ordering Options


Model Number	Description
DT3-2.5-01	Base Model
DT3-2.5-01L	Lapped Model
DT3-2.5-01S	Sealed Model
DT3-2.5-01LS	Lapped and Sealed Model

### Features

- Solid state reliability
- Built with high temperature solder with the ability to withstand higher assembly processing temperatures for short periods of time (<160°C)
- Superior nickel diffusion barriers on elements
- High strength for rugged environment
- Porched configuration for improved leadwire strength
- RTV sealing option available to improve reliability in condensing environment
- Lapped option available for multiple module applications.

Performance Curves

Environment: One atmosphere dry nitrogen

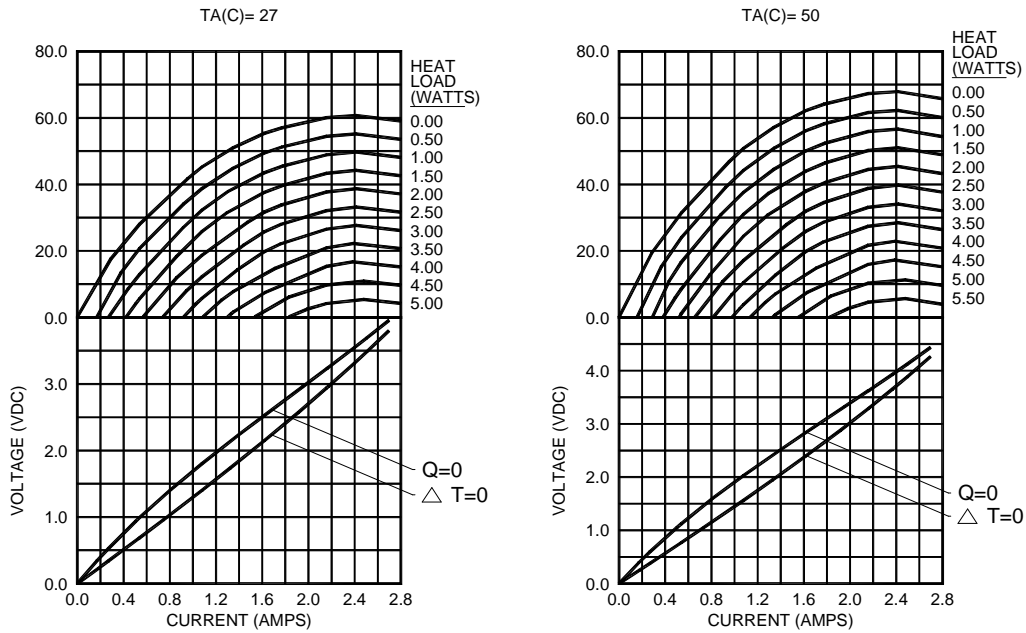

For performance information in a vacuum or with hot side temperatures other than  $27^\circ\text{C}$  or  $50^\circ\text{C}$ , consult one of our Applications Engineers.

Installation

Consult Marlow Industries' Thermoelectric Installation Guide or reliability report for more details. For additional information, please contact one of our application engineers for technical support.

Operation Cautions

Maximum storage and operation  $+150^\circ\text{C}$ .  
 For maximum reliability, storage and operation below  $85^\circ\text{C}$  is recommended. Excessive power cycling and powering through thermostatic (on/off) control is not recommended.



**Marlow Industries, Inc.**  
 10451 Vista Park Road  
 Dallas Texas 75238-1645  
 TEL: 214-340-4900  
 FAX: 214-341-5212  
 Internet: [www.marlow.com](http://www.marlow.com)

**Marlow Industries Europe**  
 Aberdeen House, South Road  
 Haywards Heath  
 West Sussex RH164NG UK  
 TEL: +44 (0)1444-443404  
 FAX: +44 (0)1444-443334

**Marlow Industries Asia**  
 1-1-8-401  
 Uehara, Shibuya-ku  
 Tokyo, Japan 151-0064  
 TEL: +81 (3) 5454-5280  
 FAX: +81 (3) 5454-5281