



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

2SC4081
2SC4081-A
2SC4081-B
2SC4081-C

Features

- Low Cob . Cob=2.0pF(Typ.)
- Complementary to 2SC1576A
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Maximum Ratings

Symbol	Rating	Rating	Unit
V _{CEO}	Collector-Emitter Voltage	50	V
V _{CBO}	Collector-Base Voltage	60	V
V _{EBO}	Emitter-Base Voltage	7	V
I _C	Collector Current	150	mA
P _C	Collector power dissipation	200	mW
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
--------	-----------	-----	-----	-----	-------

OFF CHARACTERISTICS

I _{CBO}	Collector Cutoff Current (V _{CB} =-60Vdc)	---	---	100	nAdc
I _{EBO}	Emitter Cutoff Current (V _{EB} =-6.0Vdc)	---	---	100	nAdc

ON CHARACTERISTICS


BV _{CBO}	Collector-base breakdown voltage (I _C =-50μAdc)	60	---	---	Vdc
BV _{CEO}	Collector-emitter breakdown voltage (I _C =-1μAdc)	50	---	---	Vdc
BV _{EBO}	Emitter-base breakdown voltage (I _E =-50μAdc)	6	---	---	Vdc
h _{FE}	DC Current Gain (I _C =-1mAdc, V _{CE} =-6.0Vdc)	120	---	560	---
V _{CE(sat)}	Collector Saturation Voltage* (I _C =-50mAdc, I _B =-5.0mAdc)	---	---	0.4	Vdc
C _{ob}	Output Capacitance (V _{CB} =-12.0Vdc, I _E =0, f=1.0MHz)	---	2.0	3.5	pF
f _T	Gain Bandwidth product (V _{CE} =-12Vdc, I _E =2mAdc, f=30MHz)	---	180	---	MHz

h_{FE} CLASSIFICATION

Rank	A	B	C
Marking	BQ	BR	BS
h _{FE}	120~270	180~390	270~560


**NPN Silicon
 Epitaxial Transistors**

SOT-323

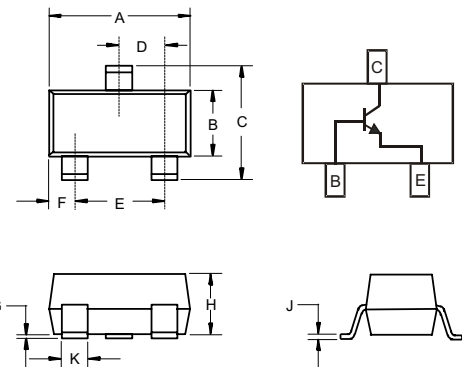

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout

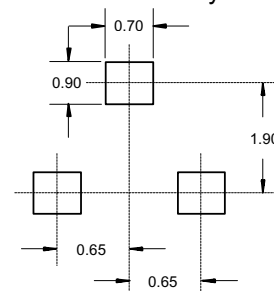

2SC4081

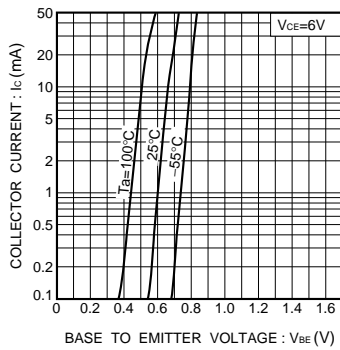


Fig.1 Grounded emitter propagation characteristics

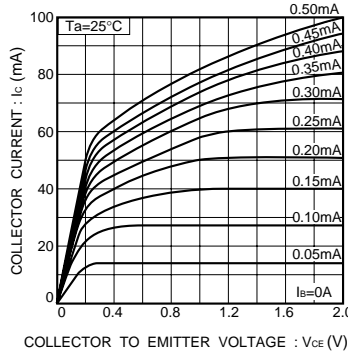


Fig.2 Grounded emitter output characteristics (I)

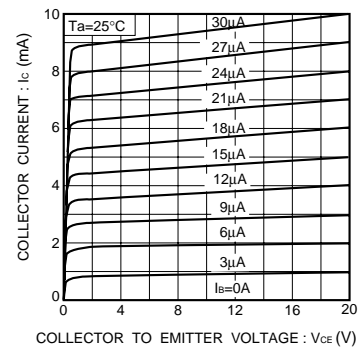


Fig.3 Grounded emitter output characteristics (II)

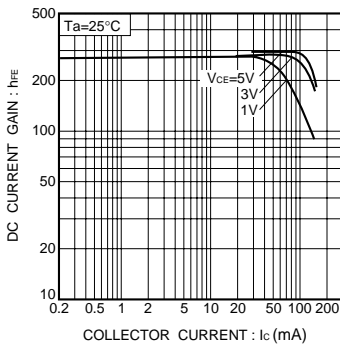


Fig.4 DC current gain vs. collector current (I)

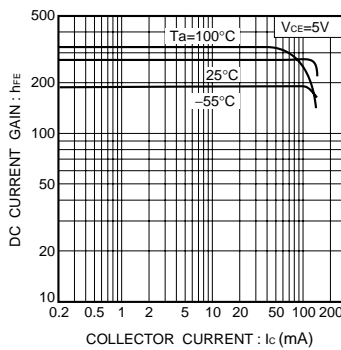


Fig.5 DC current gain vs. collector current (II)

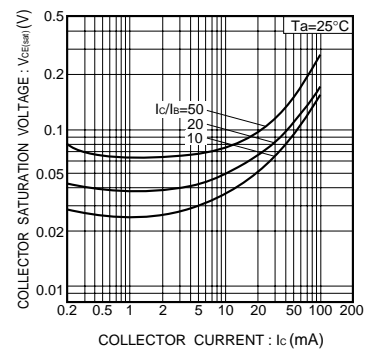


Fig. 6 Collector-emitter saturation voltage vs. collector current

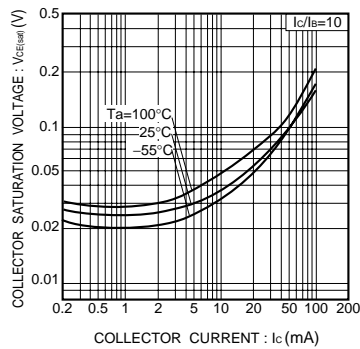


Fig.7 Collector-emitter saturation voltage vs. collector current (I)

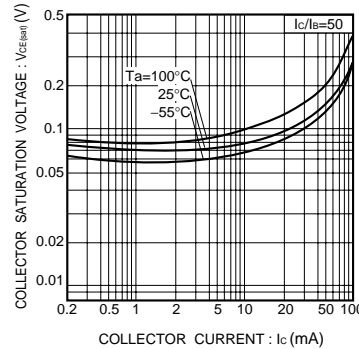


Fig.8 Collector-emitter saturation voltage vs. collector current (II)

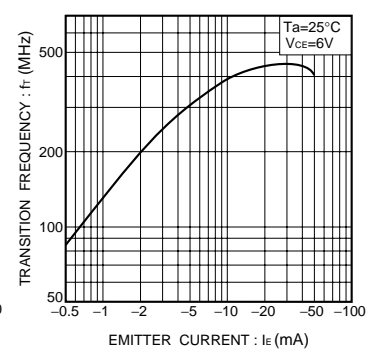


Fig.9 Gain bandwidth product vs. emitter current

2SC4081



Micro Commercial Components

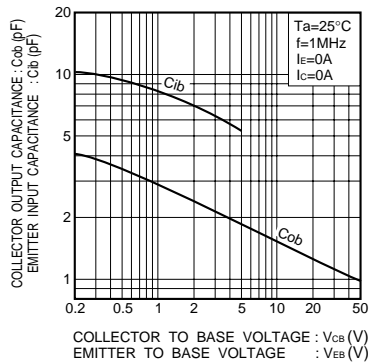


Fig.10 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

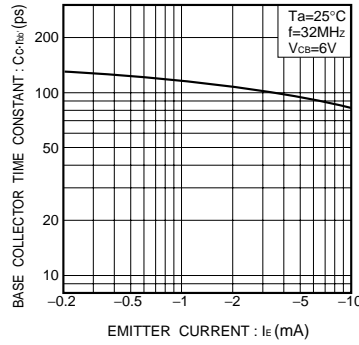


Fig.11 Base-collector time constant vs. emitter current



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.