



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

**2SC5343-O**  
**2SC5343-Y**  
**2SC5343-G**  
**2SC5343-L**

## Features

- Low Collector Saturation Voltage:  $V_{CE(sat)}=0.25V(\text{Max.})$
- Low Output Capacitance:  $C_{ob}=2.0pF(\text{Typ.})$
- Complementary Pair With 2SA1980
- Marking : C5343
- Case Material:Molded Plastic. UL Flammability Classificatio Rating 94-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)

## Maximum Ratings

Symbol	Rating	Rating	Unit
$V_{CEO}$	Collector-Emitter Voltage	50	V
$V_{CBO}$	Collector-Base Voltage	60	V
$V_{EBO}$	Emitter-Base Voltage	5.0	V
$I_C$	Collector Current	150	mA
$P_C$	Collector power dissipation	625	mW
$T_J$	Junction Temperature	150	$^{\circ}C$
$T_{STG}$	Storage Temperature	-55 to +150	$^{\circ}C$

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

### OFF CHARACTERISTICS

$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=100\mu\text{Adc}$ , $I_E=0$ )	60	---	---	Vdc
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ( $I_C=10\text{mAdc}$ , $I_E=0$ )	50	---	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_E=10\mu\text{Adc}$ , $I_C=0$ )	5.0	---	---	Vdc
$I_{CBO}$	Collector-Base Cutoff Current ( $V_{CB}=60\text{Vdc}$ , $I_E=0$ )	---	---	0.1	$\mu\text{Adc}$
$I_{EBO}$	Emitter-Base Cutoff Current ( $V_{EB}=5.0\text{Vdc}$ , $I_C=0$ )	---	---	0.1	$\mu\text{Adc}$


### ON CHARACTERISTICS

$h_{FE}$	Forward Current Transfer ratio* ( $I_C=2.0\text{Adc}$ , $V_{CE}=6.0\text{Vdc}$ )	70	---	700	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=100\text{mAdc}$ , $I_B=10\text{mAdc}$ )	---	---	0.25	Vdc
$f_T$	Transition Frequency ( $V_{CE}=10\text{Vdc}$ , $I_C=1.0\text{mAdc}$ )	80	---	---	MHz
$C_{ob}$	Collector Output Capacitance ( $V_{CB}=10\text{Vdc}$ , $I_E=0$ , $f=1.0\text{MHz}$ )	---	2.0	3.5	pF
NF	Noise Figure ( $V_{CE}=6.0\text{Vdc}$ , $I_C=0.1\text{mAdc}$ , $f=1.0\text{KHz}$ , $R_g=10K\Omega$ )	---	---	10	dB

\*  $h_{FE}$  rank / O: 70-140, Y:120-240, G:200-400, L:300-700

## NPN Silicon Transistors

### TO-92

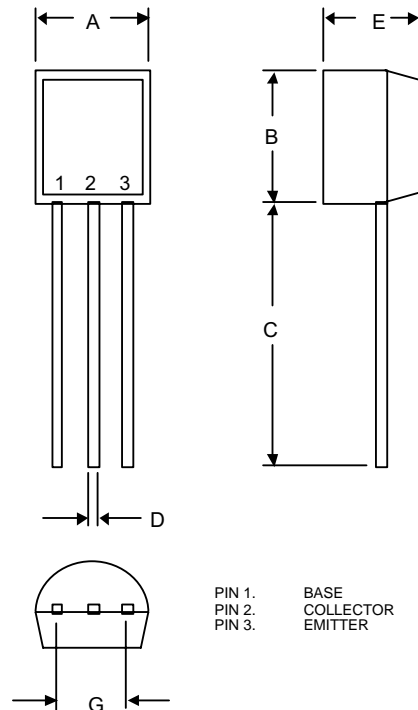

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.170	.190	4.33	4.83	
B	.170	.190	4.30	4.83	
C	.550	.590	13.97	14.97	
D	.010	.020	0.36	0.56	
E	.130	.160	3.30	3.96	
G	.010	.104	2.44	2.64	

[www.mccsemi.com](http://www.mccsemi.com)



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-AP	Ammo Packing;2Kpcs/AmmoBox
(Part Number)-BP	Bulk;1Kpcs/Bag

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .  
*Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

[www.mccsemi.com](http://www.mccsemi.com)