



# MMVL3401TS

## SURFACE MOUNT PIN DIODE

**VOLTAGE** 35 Volts **POWER** 200 mW


SOD-523 Unit: inch ( mm )

### FEATURES

- Very low series resistance at 100MHz (0.45 Ω typical@I<sub>F</sub>=10mA)
- Low capacitance (0.8pF typical@V<sub>R</sub>=20V)
- Surface mount package ideally suited for automatic insertion
- Pb free product are available : 99% Sn above can meet RoHS environment substance directive request

### MECHANICAL DATA

Case: SOD-523 plastic  
 Terminals : Solderable per MIL-STD-750,Method 2026  
 Approx Weight: 0.008 grams  
 Device Marking : 34

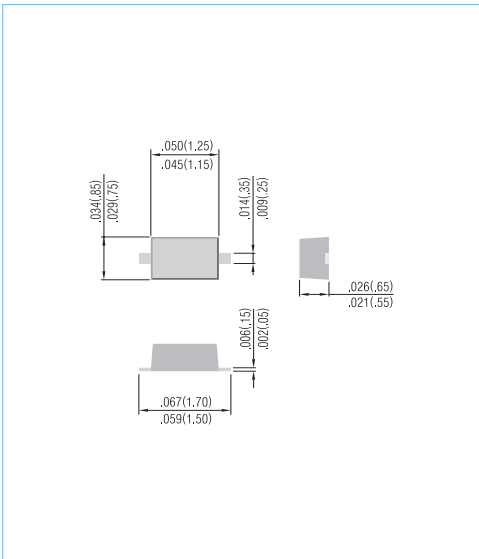

### ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
Maximum Reverse Voltage	V <sub>R</sub>	35	V
Continuous Forward Current	I <sub>F</sub>	0.2	A
Power Dissipation <sup>(1)</sup>	P <sub>TOT</sub>	200	mW
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to 150	°C

### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	VALUE	UNITS
Thermal Resistance , Junction to Ambient <sup>(1)</sup>	R <sub>θJA</sub>	625	°C/W

Note 1 : FR-5 Board 1.0 x 0.75 x 0.062 in.







# MMVL3401TS

## ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=10\mu\text{A}$	35	-	-	V
Reverse Current	$I_R$	$V_R=25\text{V}$	-	-	100	nA
Series Resistance	$R_S$	$I_F=10\text{mA}, f=100\text{MHz}$	-	0.45	0.7	$\Omega$
Total Capacitance	$C_T$	$f=1.0\text{MHz}; V_R=20\text{V}$	-	-	1.0	pF

### ELECTRICAL CHARACTERISTICS CURVE

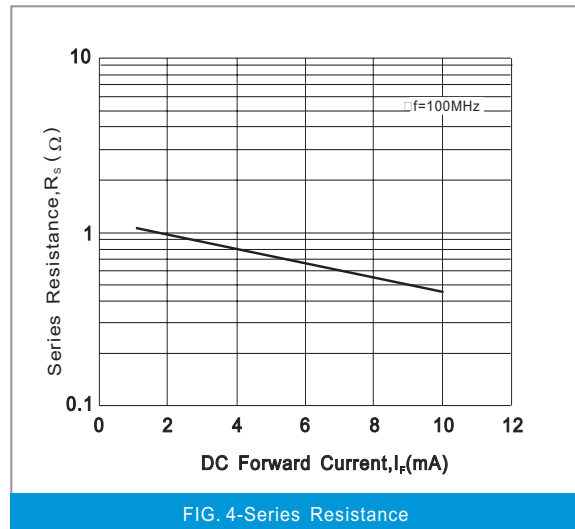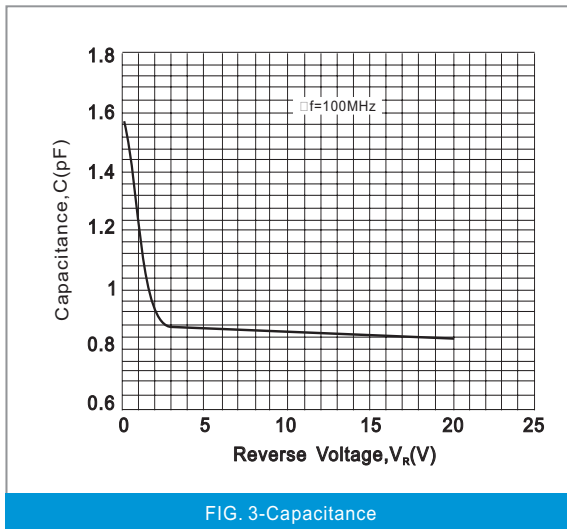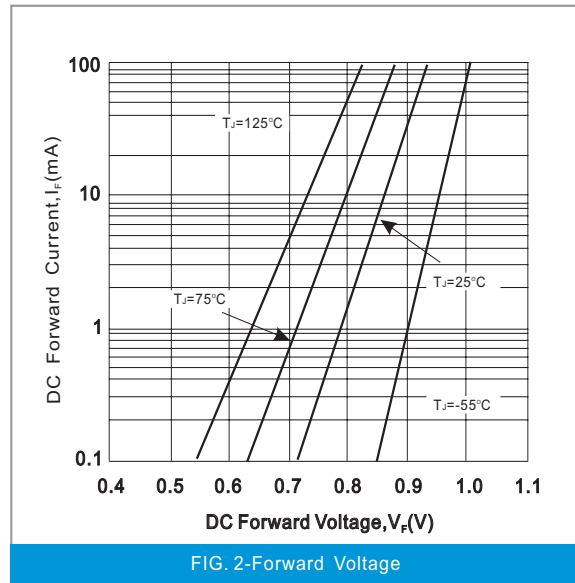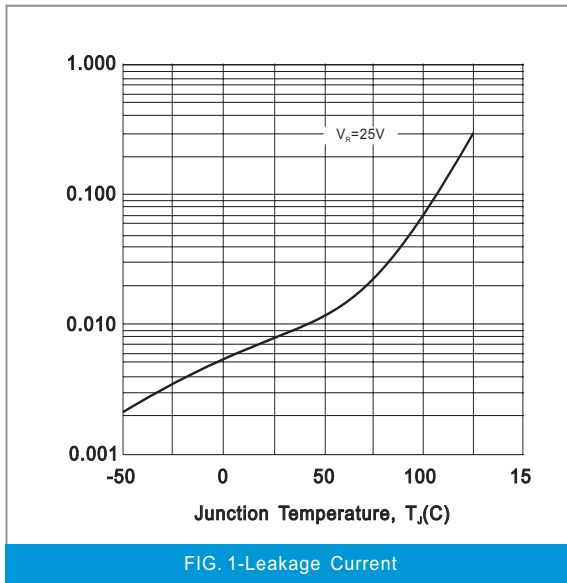




# MMVL3401TS

## MOUNTING PAD LAYOUT

SOD-523

Unit: inch ( mm )

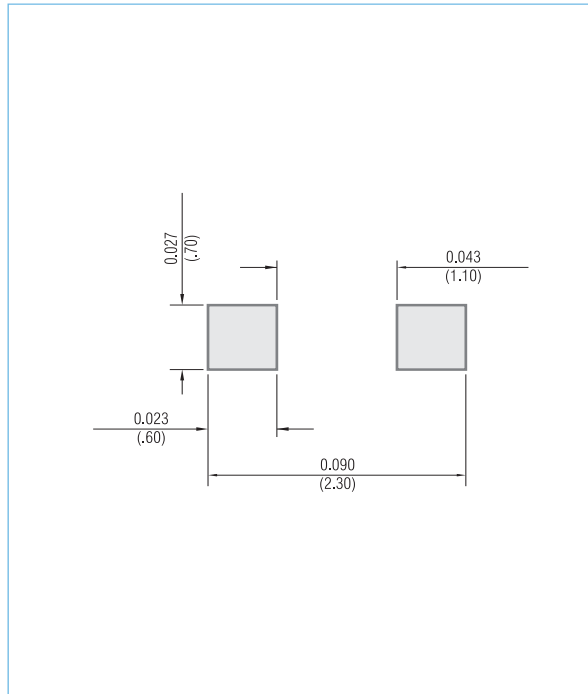

## ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 5K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2005

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.