Schottky barrier diode RB060M-30

Applications


General rectification


Features


 Small power mold type. (PMDU)
Low IR
High reliability

Construction


Silicon epitaxial planar







•Taping dimensions (Unit : mm)

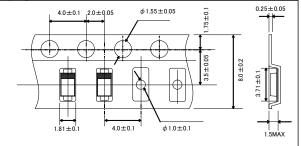

•Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Reverse voltage (repetitive peak)	V _{RM}	30	V
Reverse voltage (DC)	V _R	30	V
Average rectified forward current	lo	2	A
Forward current surge peak (60Hz · 1cyc)	I _{FSM}	55	A
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C

(*1)Tc=65°C MAX. Mounted on epoxy board. 180° Half sine wave

•Electrical characteristic (Ta=25°C)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
Forward voltage	V _F 1	0.32	0.4	0.45	V	I _F =1.0A	
	V _F 2	0.36	0.44	0.49	V	I _F =2.0A	
Reverse current	I _R	-	10	50	μA	V _R =30V	
ESD break down voltage	ESD	7	-	-	kV	C=200pF , R=0 Ω forward and reverse : 1 time	

rohm

Rev.A 1/3


Diodes

•Electrical characteristic curves

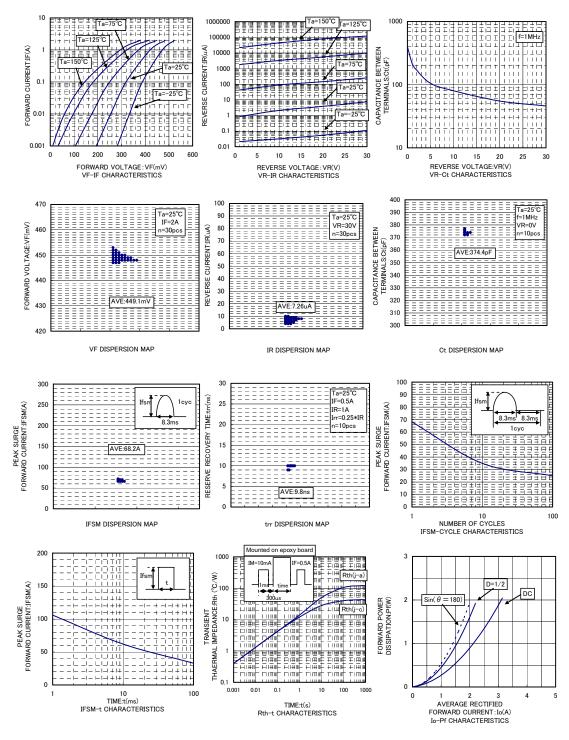


rohm

Rev.A 2/3

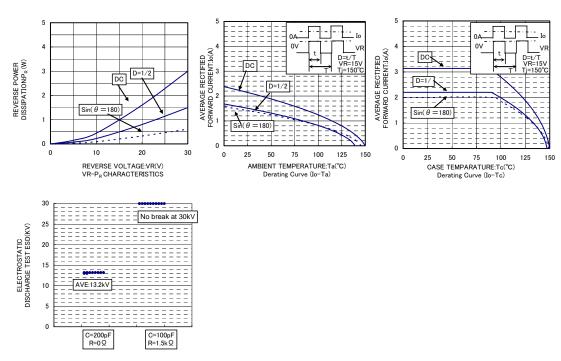

ESD DISPERSION MAP

ROHM

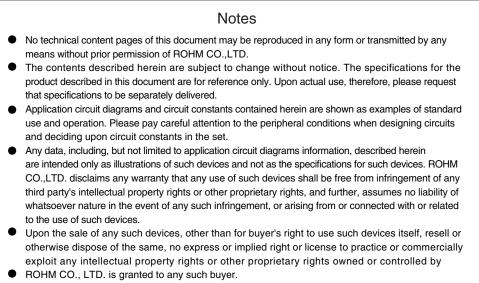

• Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUPOPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2007 ROHM CO., LTD. ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan TEL:+81-75-311-2121 FAX:+81-75-315-0172

ROHM

Appendix1-Rev2.0