

NUR30Q

Quad Schottky Barrier Diodes Array

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

Features:

- Very Low Forward Voltage
- Guard Ring Protected
- Ultra Small SMD Package

Typical Applications:

- Ultra High-Speed Switching
- Low Current Rectification
- Low Power Consumption Applications (e.g. Hand-Held Devices)

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Rating	Symbol	Value	Unit
Reverse Voltage	V_R	30	Volts
Forward Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_F	385 3.1	mW mW/ $^\circ\text{C}$
Forward Current (DC)	I_F	200	mA
Junction Temperature	T_J	125	$^\circ\text{C}$




ON Semiconductor®

<http://onsemi.com>


30 VOLT QUAD SCHOTTKY DIODES ARRAY



MARKING DIAGRAM



SC-88A/SOT-353
CASE 419A
STYLE 9



R9 = Device Marking
D = One Digit Date Code

ORDERING INFORMATION


Device	Package	Shipping†
NUR30QW5T1	SC-88A	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NUR30Q

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (EACH DIODE)

Characteristic	Symbol	Min	Typ	Max	Unit
Total Capacitance ($V_R = 1.0\text{ V}$, $f = 1.0\text{ MHz}$)	C_T	-	10	20	pF
Reverse Leakage ($V_R = 10\text{ V}$)	I_R	-	1.5	30	μA_{dc}
Forward Voltage ($I_F = 0.1\text{ mA}_{dc}$)	V_F	-	0.15	0.19	Vdc
Forward Voltage ($I_F = 1.0\text{ mA}_{dc}$)	V_F	-	0.21	0.25	Vdc
Forward Voltage ($I_F = 10\text{ mA}_{dc}$)	V_F	-	0.28	0.30	Vdc
Forward Voltage ($I_F = 100\text{ mA}_{dc}$)	V_F	-	0.36	0.41	Vdc
Forward Voltage ($I_F = 200\text{ mA}_{dc}$)	V_F	-	0.41	0.50	Vdc
Reverse Recovery Time ($I_F = I_R = 10\text{ mA}_{dc}$, $I_{R(REC)} = 1.0\text{ mA}_{dc}$) Figure 1	t_{rr}	-	5.0	-	ns

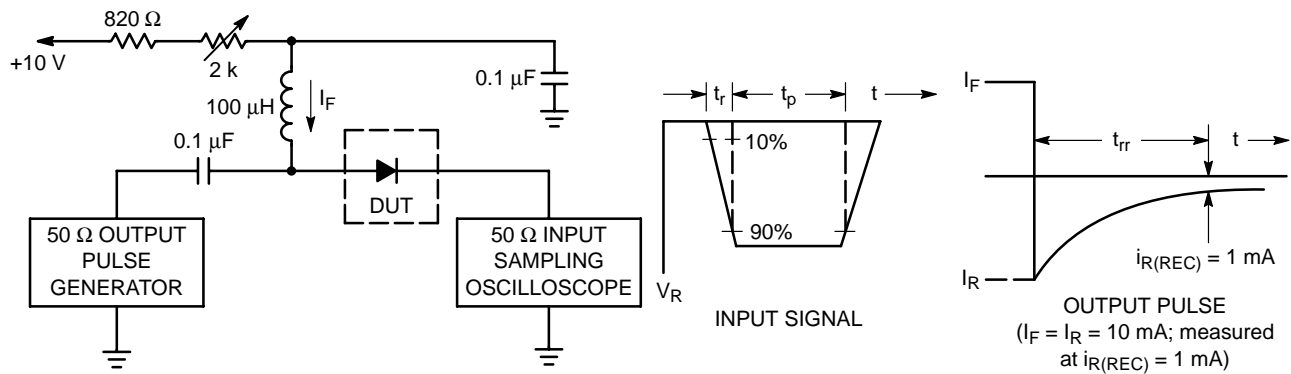

- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
 2. Input pulse is adjusted so $I_{R(\text{peak})}$ is equal to 10 mA.
 3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

NUR30Q

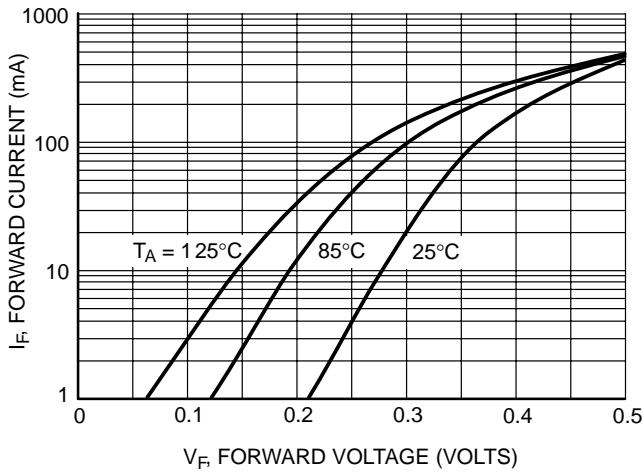


Figure 2. Forward Current as a Function of Forward Voltage; Typical Values

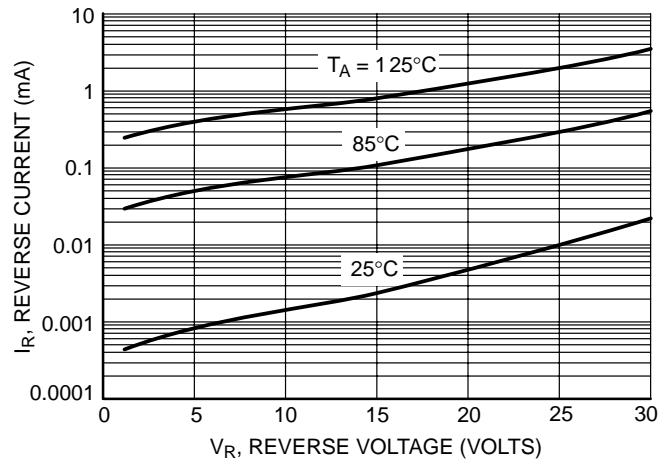


Figure 3. Reverse Current as a Function of Reverse Voltage; Typical Values


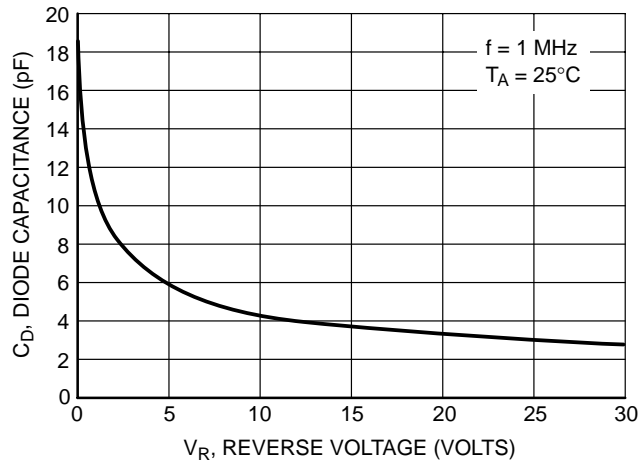


Figure 4. Diode Capacitance as a Function of Reverse Voltage; Typical Values

NUR30Q

PACKAGE DIMENSIONS

SC-88A (SOT-353)
CASE 419A-02
ISSUE G

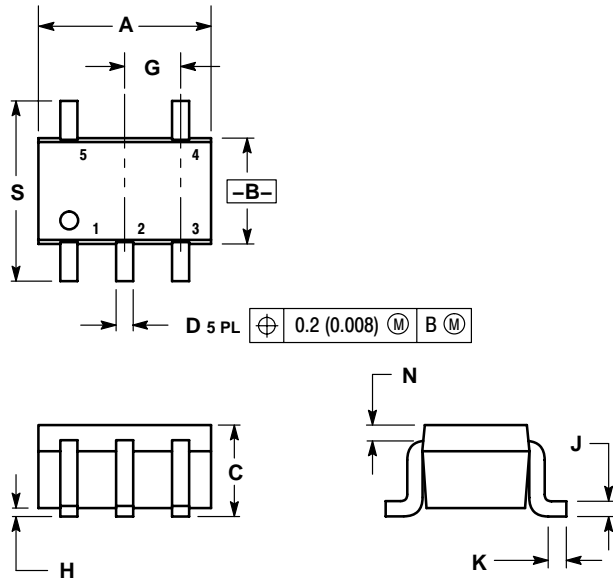

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 419A-01 OBSOLETE. NEW STANDARD 419A-02.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.031	0.043	0.80	1.10
D	0.004	0.012	0.10	0.30
G	0.026 BSC		0.65 BSC	
H	---	0.004	---	0.10
J	0.004	0.010	0.10	0.25
K	0.004	0.012	0.10	0.30
N	0.008 REF		0.20 REF	
S	0.079	0.087	2.00	2.20

STYLE 9:

- PIN 1: ANODE
2: CATHODE
3: ANODE
4: ANODE
5: ANODE

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada

Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada

Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your
local Sales Representative.

NUR30Q/D