



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMDT3946

NPN/PNP Small Signal Surface Mount Transistors

Features



- Complementary Pair: NPN(3904), PNP(3906)
- Ideal for Low Power Amplification and Switching
- Ultra-small Surface Mount Package
- Epitaxial Planar Die Construction
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:K46

Maximum Ratings @ 25°C Unless Otherwise Specified

Symbol	Rating	Rating(NPN)	Unit
V _{CEO}	Collector-Emitter Voltage	40	V
V _{CB0}	Collector-Base Voltage	60	V
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current-Continuous	0.2	A
P _C	Collector Dissipation	0.2	W
R _{θJA}	Thermal Resistance Junction to Ambient	625	°C/W
T _J	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

Symbol	Rating	Rating(PNP)	Unit
V _{CEO}	Collector-Emitter Voltage	-40	V
V _{CB0}	Collector-Base Voltage	-40	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current-Continuous	-0.2	A
P _C	Collector Dissipation	0.2	W
R _{θJA}	Thermal Resistance Junction to Ambient	625	°C/W
T _J	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

SOT-363

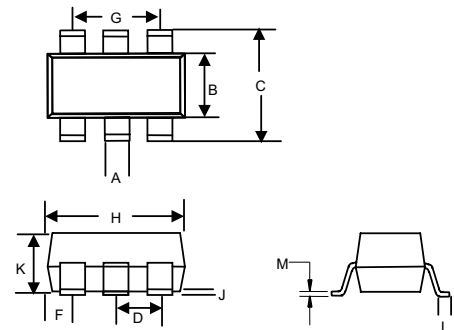

E₁, B₁, C₁ = PNP3906 Section
 E₂, B₂, C₂ = NPN3904 Section


DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	

NPN 3904 Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Typ	Max	Units	
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1mA, I_B=0$)	40	---	---	Vdc	
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\mu A, I_E=0$)	60	---	---	Vdc	
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=10\mu A, I_C=0$)	5	---	---	Vdc	
I_{CBO}	Collector Cutoff Current ($V_{CB}=30Vdc, I_E=0$)	---	---	50	nAdc	
I_{CEO}	Collector Cutoff Current ($V_{CE}=30Vdc, I_B=0$)	---	---	500	nAdc	
I_{EBO}	Emitter Cutoff Current ($V_{EB}=5Vdc, I_C=0$)	---	---	50	nAdc	
h_{FE}	DC Current Gain ($I_C=0.1mA, V_{CE}=1Vdc$)	40	---	---	---	
	($I_C=1mA, V_{CE}=1Vdc$)	70	---	---		
	($I_C=10mA, V_{CE}=1Vdc$)	100	---	300		
	($I_C=50mA, V_{CE}=1Vdc$)	60	---	---		
	($I_C=100mA, V_{CE}=1Vdc$)	30	---	---		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10mA, I_B=1mA$)	---	---	0.2	Vdc	
	($I_C=50mA, I_B=5mA$)	---	---	0.3		
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10mA, I_B=1mA$)	0.65	---	0.85	Vdc	
	($I_C=50mA, I_B=5mA$)	---	---	0.95		
f_T	Current Gain-Bandwidth Product ($V_{CE}=20Vdc, I_C=20mA, f=100MHz$)	300	---	---	MHz	
C_{ob}	Output Capacitance ($V_{CB}=5Vdc, f=1.0MHz, I_E=0$)	---	---	4	pF	
NF	Noise Figure ($V_{CE}=5V, I_C=0.1mA, f=1KHz, R_S=1k\Omega$)	---	---	5	dB	
t_d	Delay Time	$V_{CC}=3V, I_C=10mA, V_{BE}=0.5V,$ $I_{B1}=1mA$	---	---	35	ns
t_r	Rise Time		---	---	35	ns
t_s	Storage Time		---	---	200	ns
t_f	Fall Time		---	---	50	ns

PNP 3906 Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-1\text{mA}$, $I_B=0$)	-40	---	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\mu\text{A}$, $I_E=0$)	-40	---	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=-10\mu\text{A}$, $I_C=0$)	-5	---	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=-30\text{Vdc}$, $I_E=0$)	---	---	-50	nAdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=-5\text{Vdc}$, $I_C=0$)	---	---	-50	nAdc
h_{FE}	DC Current Gain ($I_C=-0.1\text{mA}$, $V_{CE}=-1\text{Vdc}$) ($I_C=-1\text{mA}$, $V_{CE}=-1\text{Vdc}$) ($I_C=-10\text{mA}$, $V_{CE}=-1\text{Vdc}$) ($I_C=-50\text{mA}$, $V_{CE}=-1\text{Vdc}$) ($I_C=-100\text{mA}$, $V_{CE}=-1\text{Vdc}$)	40 70 100 60 30	---	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=-10\text{mA}$, $I_B=-1\text{mA}$) ($I_C=-50\text{mA}$, $I_B=-5\text{mA}$)	---	---	-0.25 -0.4	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=-10\text{mA}$, $I_B=-1\text{mA}$) ($I_C=-50\text{mA}$, $I_B=-5\text{mA}$)	-0.65 ---	---	-0.85 -0.95	Vdc
f_T	Current Gain-Bandwidth Product ($V_{CE}=-20\text{Vdc}$, $I_C=-10\text{mA}$, $f=100\text{MHz}$)	250	---	---	MHz
C_{ob}	Output Capacitance ($V_{CB}=-5\text{Vdc}$, $f=1.0\text{MHz}$, $I_E=0$)	---	---	4.5	pF
NF	Noise Figure ($V_{CE}=-5\text{V}$, $I_C=-0.1\text{mA}$, $f=1\text{KHz}$, $R_S=1\text{k}\Omega$)	---	---	4	dB
t_d	Delay Time	$V_{CC}=-3\text{V}$, $I_C=-10\text{mA}$, $V_{BE}=-0.5\text{V}$,		35	ns
t_r	Rise Time	$I_{B1}=-I_{B2}=-1\text{mA}$		35	ns
t_s	Storage Time	$V_{CC}=-3\text{V}$, $I_C=-10\text{mA}$, $I_{B1}=-I_{B2}=-1\text{mA}$		225	ns
t_f	Fall Time			75	ns

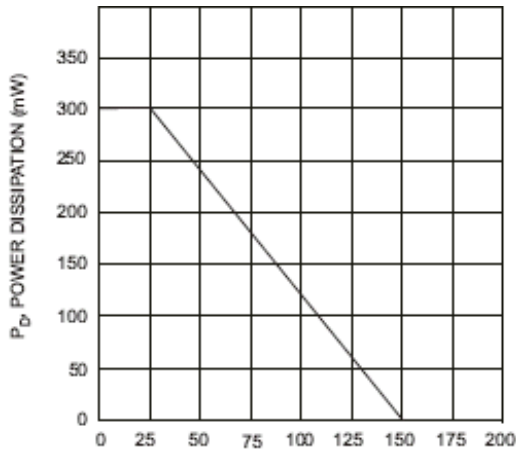


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1, Max Power Dissipation vs Ambient Temperature (Total Device)

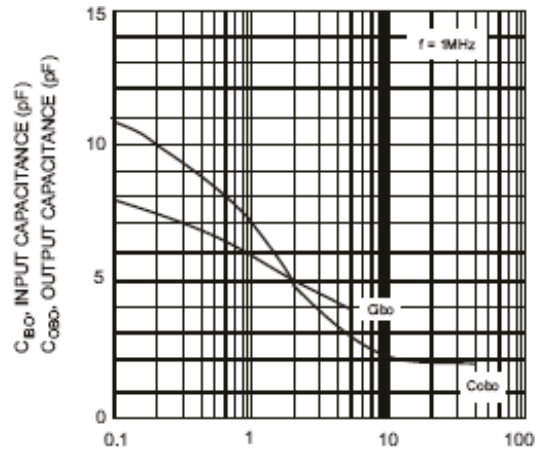


V_{CB} , COLLECTOR-BASE VOLTAGE (V)
Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage (NPN-3904)

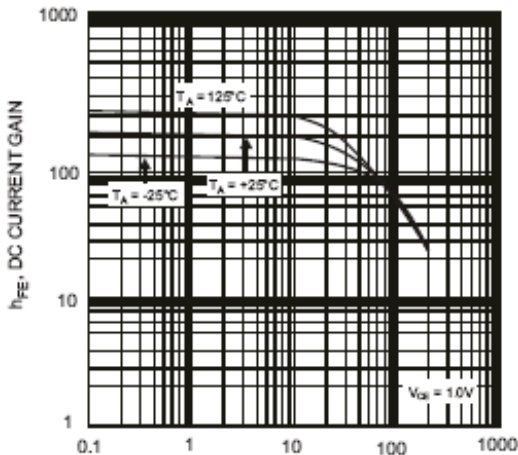


I_C , COLLECTOR CURRENT (mA)
Fig. 3, Typical DC Current Gain vs Collector Current (NPN-3904)

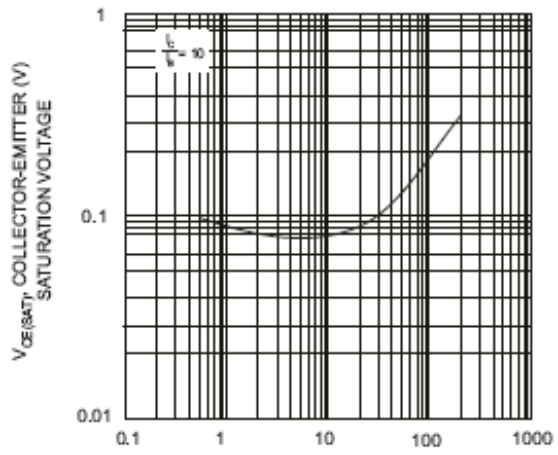




I_C , COLLECTOR CURRENT (mA)
Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current (NPN-3904)

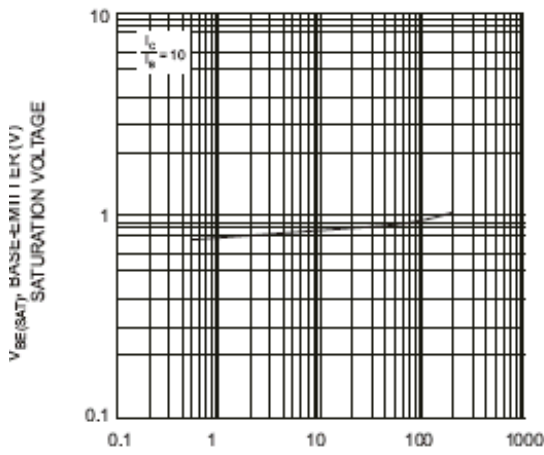

I_C , COLLECTOR CURRENT (mA)
Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current (NPN-3904)

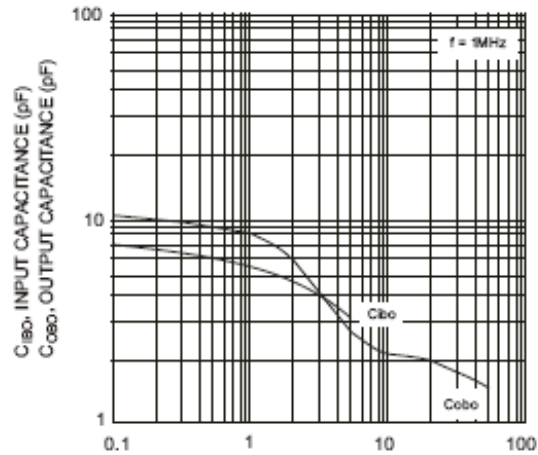

V_{CB} , COLLECTOR-BASE VOLTAGE (V)
Fig. 6, Input and Output Capacitance vs. Collector-Base Voltage (PNP-3906)

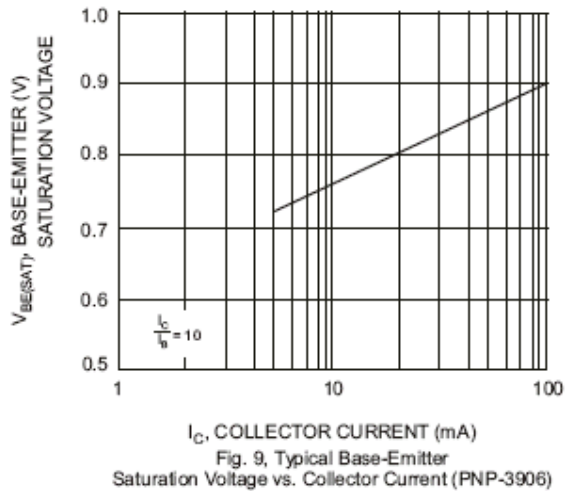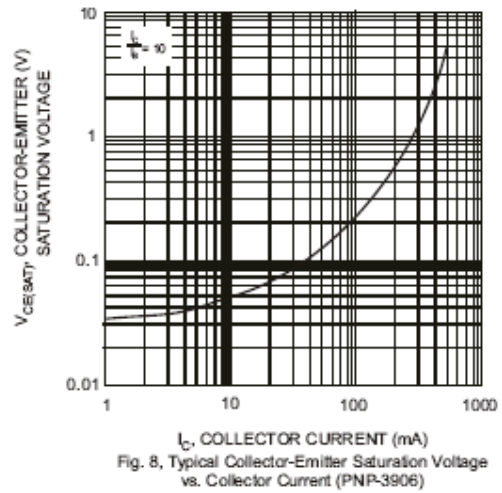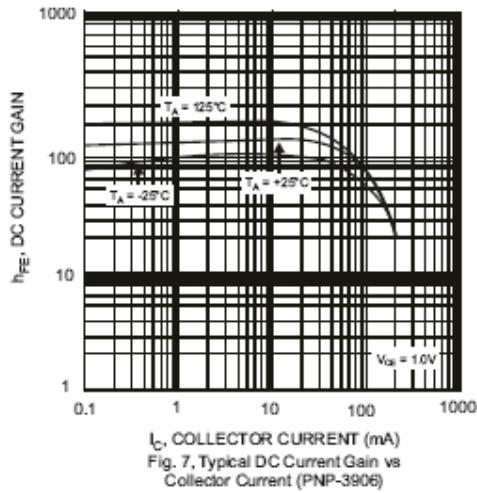



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com