

Coaxial

Power Splitter/Combiner

ZMSC-2-2

2 Way-0° 50Ω 0.002 to 60 MHz




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Outline Drawing

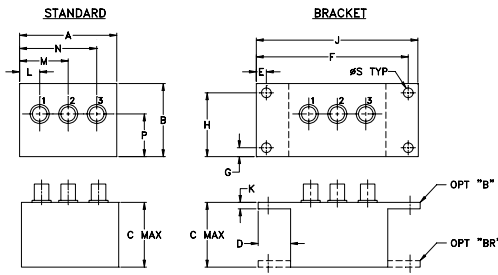

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0

Features

- wideband, 0.002 to 60 MHz
- low insertion loss, 0.3 dB typ.
- good isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- rugged shielded case

Applications

- HF
- amateur radio
- federal communications

CASE STYLE: M21

Connectors	Model	Price	Qty.
SMA	ZMSC-2-2	\$59.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB)** ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L*		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.002-60	27	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.3


L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
 * Isolation specified to 0.004 MHz

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2					
0.002	3.18	3.17	0.01	17.44	1.30	1.62	1.62
0.01	3.13	3.12	0.01	24.03	1.18	1.06	1.06
0.02	3.12	3.11	0.01	29.51	1.17	1.06	1.06
0.10	3.10	3.11	0.01	35.51	1.18	1.06	1.05
1.00	3.13	3.13	0.00	49.92	1.19	1.05	1.05
5.00	3.13	3.13	0.00	51.68	1.20	1.04	1.04
10.00	3.16	3.16	0.00	51.68	1.21	1.04	1.03
20.00	3.22	3.22	0.00	34.91	1.22	1.04	1.04
30.00	3.22	3.22	0.00	34.91	1.22	1.04	1.04
40.00	3.24	3.25	0.01	32.76	1.23	1.04	1.04
50.00	3.24	3.25	0.01	30.66	1.23	1.05	1.05
60.00	3.35	3.35	0.00	28.08	1.23	1.07	1.07
70.00	3.41	3.40	0.01	26.55	1.22	1.09	1.09
80.00	3.46	3.45	0.01	25.62	1.22	1.12	1.12
90.00	3.47	3.46	0.01	25.23	1.23	1.10	1.10
100.00	3.49	3.50	0.01	24.87	1.22	1.12	1.12

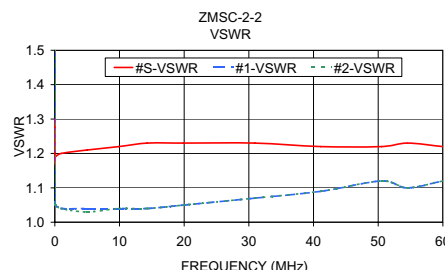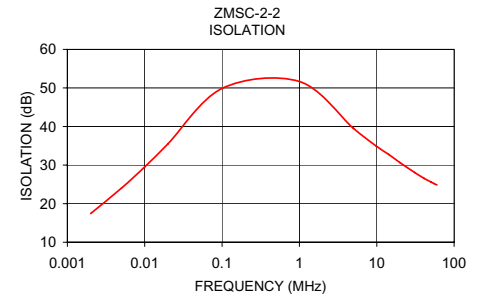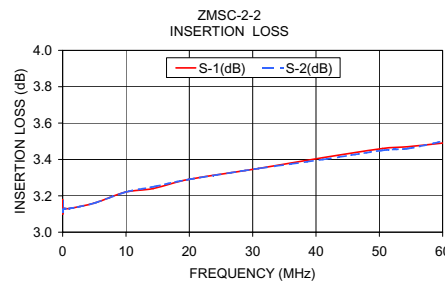

electrical schematic



Mini-Circuits
 ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
 M9482
 ZMSC-2-2
 HY/TD/CP/AM
 070928