


## Glass Passivated Single-Phase Bridge Rectifier

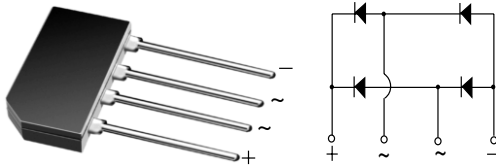

Case Type GBL

### FEATURES

- UL Recognition file number E54214
- Ideal for printed circuit boards
- High surge current capability
- Typical  $I_R$  less than  $0.1 \mu\text{A}$
- High case dielectric strength
- Solder Dip  $260^\circ\text{C}$ , 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### MAJOR RATINGS AND CHARACTERISTICS

$I_{F(AV)}$	4 A
$V_{RRM}$	50 V to 1000 V
$I_{FSM}$	120 A
$I_R$	$5 \mu\text{A}$
$V_F$	1.0 V
$T_j \text{ max.}$	$150^\circ\text{C}$

### TYPICAL APPLICATIONS

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, SMPS, Adapter, Audio equipment, and Home Appliances application.

### MECHANICAL DATA

**Case:** GBL

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

**Polarity:** As marked on body

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	GBLA005	GBLA01	GBLA02	GBLA04	GBLA06	GBLA08	GBLA10	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_C = 50^\circ\text{C}$ (1) $T_A = 40^\circ\text{C}$ (2)	$I_{F(AV)}$	4.0 3.0							A
Peak forward surge current single sine-wave superimposed on rated load	$I_{FSM}$	120							A
Rating for fusing ( $t < 8.3 \text{ ms}$ )	$I^2t$	60							$\text{A}^2\text{sec}$
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150							$^\circ\text{C}$

#### Note:

(1) Unit mounted on  $3.0 \times 3.0 \times 0.11''$  thick ( $7.5 \times 7.5 \times 0.3 \text{ cm}$ ) Aluminum plate

(2) Unit mounted on P.C.B. at  $0.375''$  ( $9.5 \text{ mm}$ ) lead length and  $0.5 \times 0.5''$  ( $12 \times 12 \text{ mm}$ ) copper pads

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)										
PARAMETER	TEST CONDITIONS	SYMBOL	GBLA005	GBLA01	GBLA02	GBLA04	GBLA06	GBLA08	GBLA10	UNIT
Maximum instantaneous forward voltage drop per diode	at 4.0 A	$V_F$				1.0				V
Maximum DC reverse current at rated DC blocking voltage per diode	$T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$	$I_R$				5.0 500				$\mu\text{A}$

<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	GBLA005	GBLA01	GBLA02	GBLA04	GBLA06	GBLA08	GBLA10	UNIT	
Typical thermal resistance	$R_{\theta JA}$ $R_{\theta JC}$				47 <sup>(2)</sup> 10 <sup>(1)</sup>				$^\circ\text{C/W}$	

**Note:**

- (1) Unit mounted on 3.0 x 3.0 x 0.11" thick (7.5 x 7.5 x 0.3 cm) Aluminum plate
- (2) Unit mounted on P.C.B. at 0.375" (9.5 mm) lead length and 0.5 x 0.5" (12 x 12 mm) copper pads

<b>ORDERING INFORMATION</b>				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
GBLA06-E3/45	2.133	45	20	Tube
GBLA06-E3/51	2.133	51	400	Anti-static PVC Tray

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

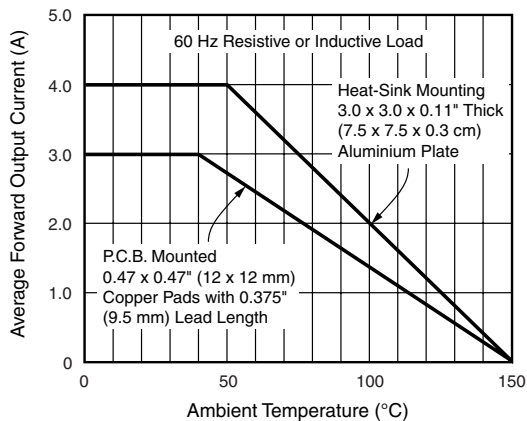


Figure 1. Derating Curves Output Rectified Current

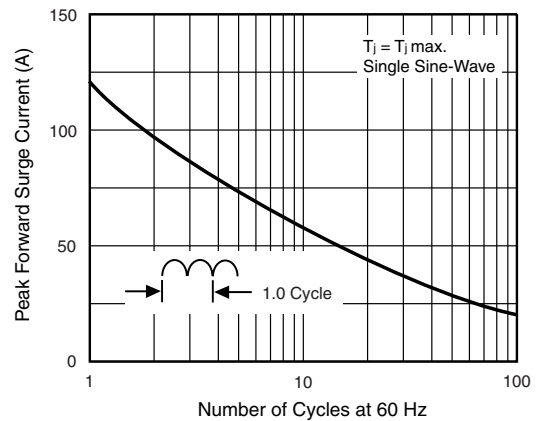


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Diode

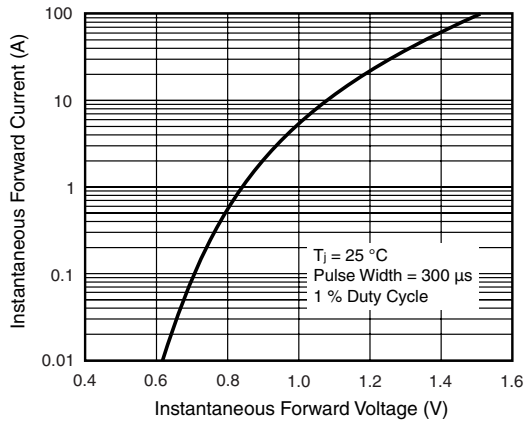


Figure 3. Typical Forward Voltage Characteristics Per Diode

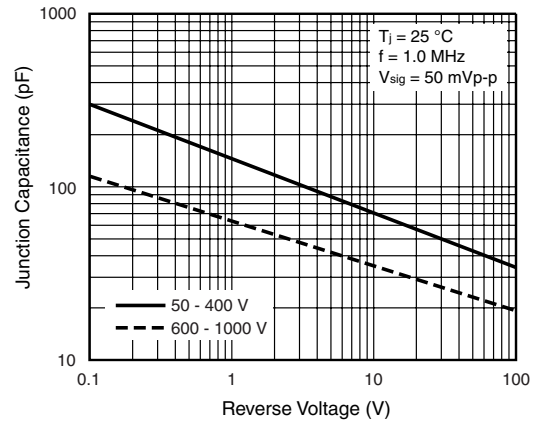


Figure 5. Typical Junction Capacitance Per Diode

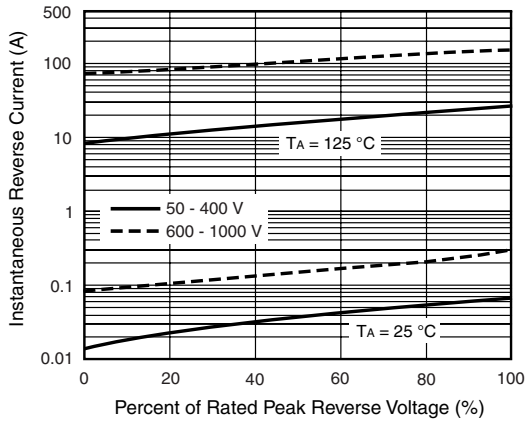


Figure 4. Typical Reverse Characteristics Per Diode


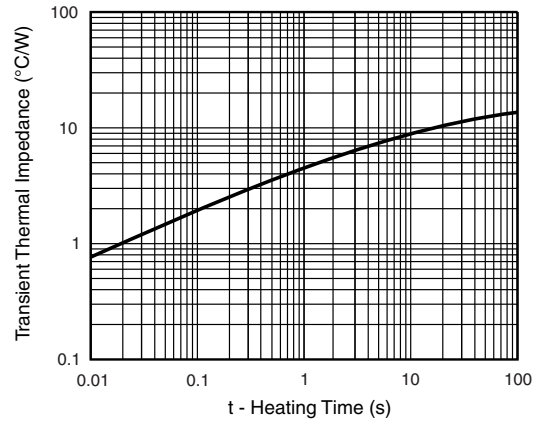


Figure 6. Typical Transient Thermal Impedance Per Diode

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

### Case Type GBL

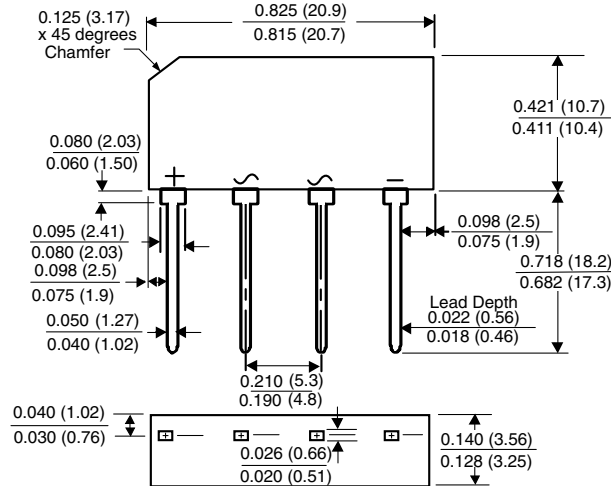

Polarity shown on front side of case, positive lead beveled corner



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.