

TS862C15R (10A)

(150V / 10A)

[0401]

High Voltage Schottky barrier diode

Major characteristics

Characteristics	TS862C15R	Units	Condition
V_{RRM}	150	V	
V_F	0.90	V	$T_c=25^\circ\text{C}$, MAX.
I_o	10	A	

Features

- Low V_F
- High Voltage
- Center tap connection

Applications

- High frequency operation
- DC-DC converters
- AC adapter

Maximum ratings and characteristics

- Absolute maximum ratings (at $T_c=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Rating	Unit
Repetitive peak surge reverse voltage	V_{RSM}	$tw=500\text{ns}$, duty=1/40	150	V
Repetitive peak reverse voltage	V_{RRM}		150	V
Average output current	I_o	Square wave, duty=1/2 $T_c=133^\circ\text{C}$	10 *	A
Non-repetitive surge current **	I_{FSM}	Sine wave 10ms 1shot	75	A
Operating junction temperature	T_j		+150	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +150	$^\circ\text{C}$

* Out put current of center tap full wave connection

**Rating per element


- Electrical characteristics (at $T_c=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_{FM}=10\text{A}$	0.90	V
Reverse current	I_R	$V_R=V_{RRM}$	150	μA
Thermal resistance	$R_{th(j-c)}$	Junction to case	1.5	$^\circ\text{C/W}$

- Mechanical characteristics


Approximate mass		2	g
------------------	--	---	---

Outline drawings, mm






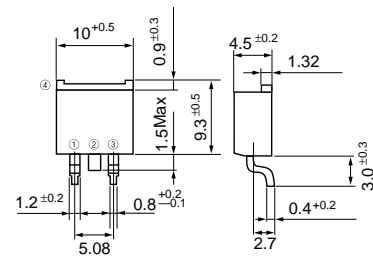


Package : T-pack
Epoxy resin UL : V-0

Connection diagram




Characteristics

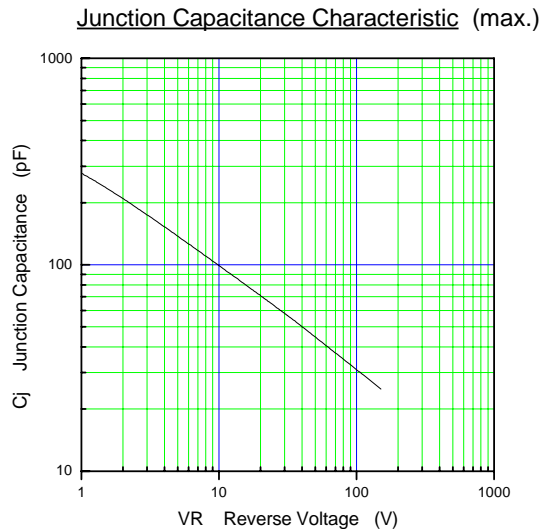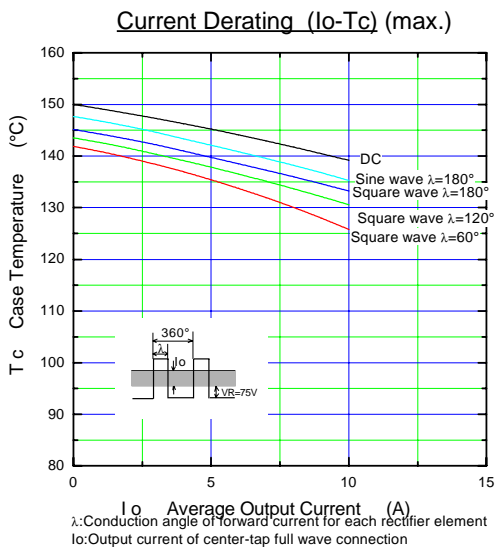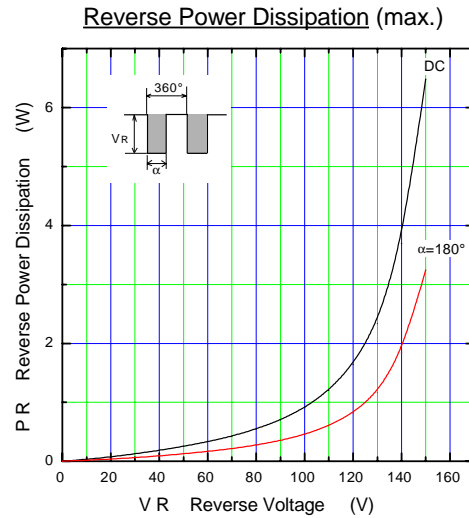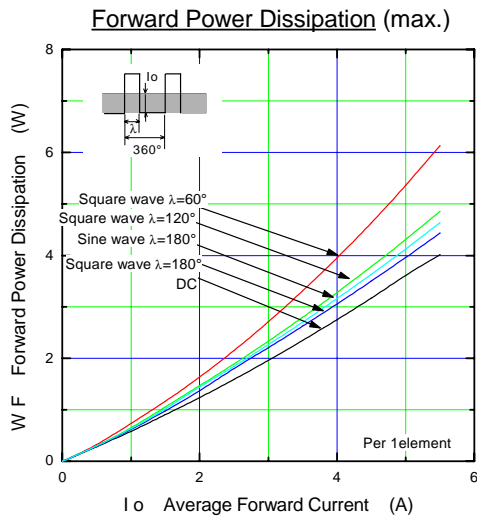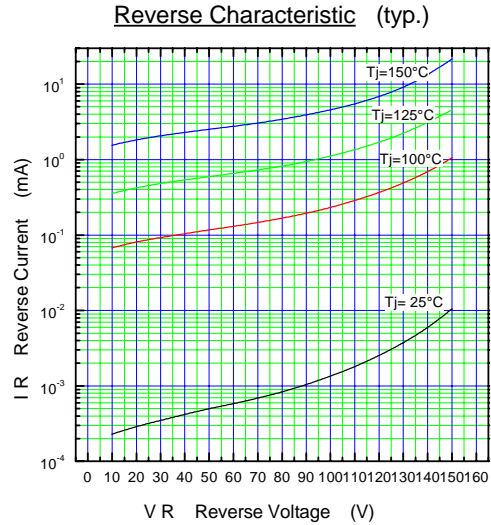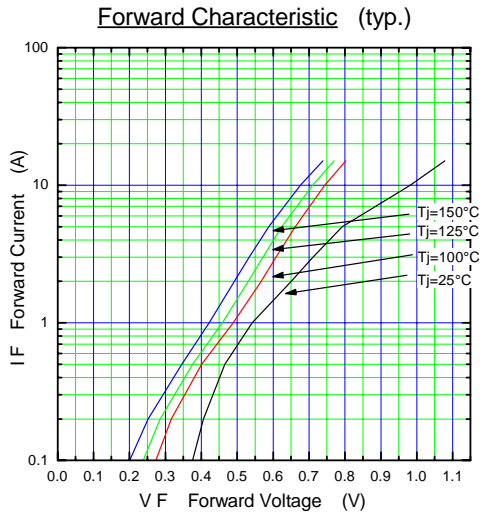


λ: Conduction angle of forward current for each rectifier element
Io: Output current of center-tap full wave connection

Surge Capability (max.)

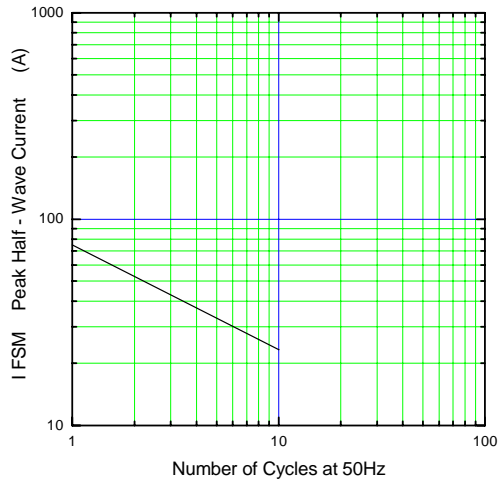

Surge Current Ratings (max.)

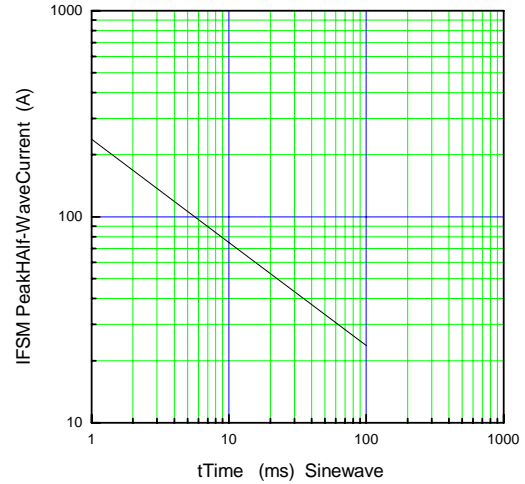

Transient Thermal Impedance (max.)

