

P-Channel 1.8-V (G-S) MOSFET



PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-20	0.010 @ $V_{GS} = -4.5$ V	-8.8
	0.013 @ $V_{GS} = -2.5$ V	-7.6
	0.016 @ $V_{GS} = -1.8$ V	-6.8

FEATURES

- TrenchFET® Power MOSFET

APPLICATIONS

- Load Switch
- PA Switch
- Charger Switch

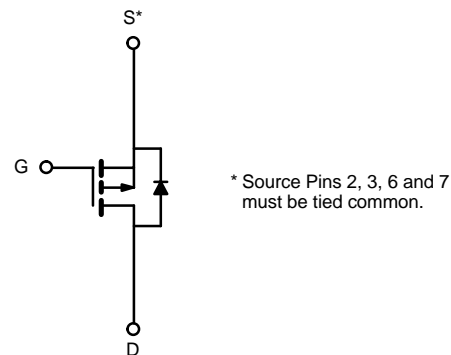

* Source Pins 2, 3, 6 and 7 must be tied common.

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)					
Parameter		Symbol	10 secs	Steady State	Unit
Drain-Source Voltage		V_{DS}	-20		V
Gate-Source Voltage		V_{GS}	± 8		
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	$T_A = 25^\circ\text{C}$	I_D	-8.8	-7.2	A
	$T_A = 70^\circ\text{C}$		-7.0	-5.7	
Pulsed Drain Current (10 μs Pulse Width)		I_{DM}	-30		
Continuous Source Current (Diode Conduction) ^a		I_S	-1.35	-0.95	
Maximum Power Dissipation ^a	$T_A = 25^\circ\text{C}$	P_D	1.5	1.05	W
	$T_A = 70^\circ\text{C}$		1.0	0.67	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

THERMAL RESISTANCE RATINGS					
Parameter		Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	$t \leq 10$ sec	R_{thJA}	60	83	$^\circ\text{C/W}$
	Steady State		100	120	
Maximum Junction-to-Foot	Steady State	R_{thJF}	35	45	

Notes



a. Surface Mounted on 1" x 1" FR4 Board.

SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -400 μA	-0.40		-0.8	V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 8 V			± 100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -16 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -16 V, V _{GS} = 0 V, T _J = 70 °C			-10	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -4.5 V	-20			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -8.8 A		0.008	0.010	Ω
		V _{GS} = -2.5 V, I _D = -7.6 A		0.010	0.013	
		V _{GS} = -1.8 V, I _D = -6.8 A		0.013	0.016	
Forward Transconductance ^a	g _{fs}	V _{DS} = -15 V, I _D = -8.8 A		45		S
Diode Forward Voltage ^a	V _{SD}	I _S = -1.3 A, V _{GS} = 0 V		-0.58	-1.1	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = -10 V, V _{GS} = -5 V, I _D = -8.8 A		69	105	nC
Gate-Source Charge	Q _{gs}		9.5			
Gate-Drain Charge	Q _{gd}		15.5			
Turn-On Delay Time	t _{d(on)}	V _{DD} = -10 V, R _L = 10 Ω I _D ≅ -1 A, V _{GEN} = -4.5 V, R _G = 6 Ω		55	85	ns
Rise Time	t _r		120	200		
Turn-Off Delay Time	t _{d(off)}		305	470		
Fall Time	t _f		160	250		
Source-Drain Reverse Recovery Time	t _{rr}		I _F = -1.3 A, di/dt = 100 A/μs	90	150	







Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.



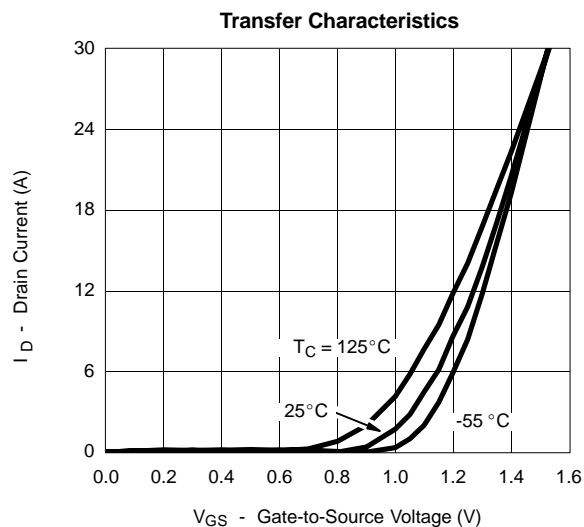
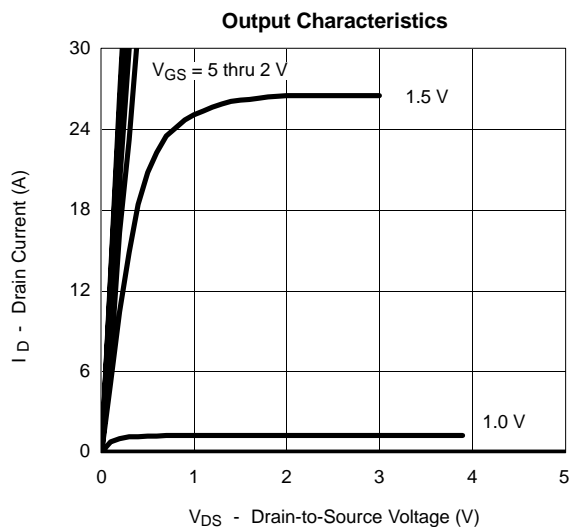
TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

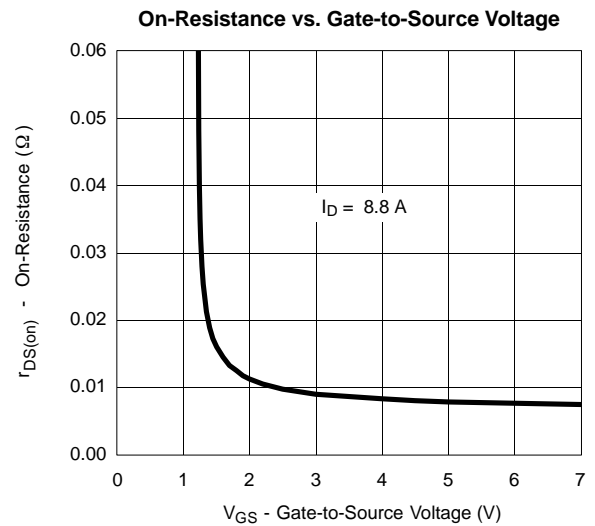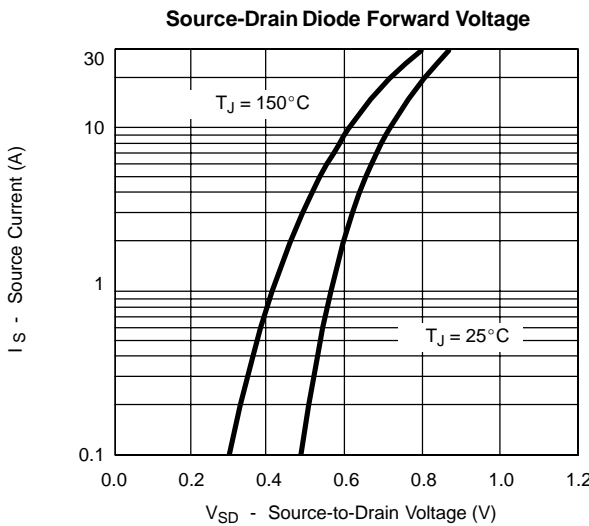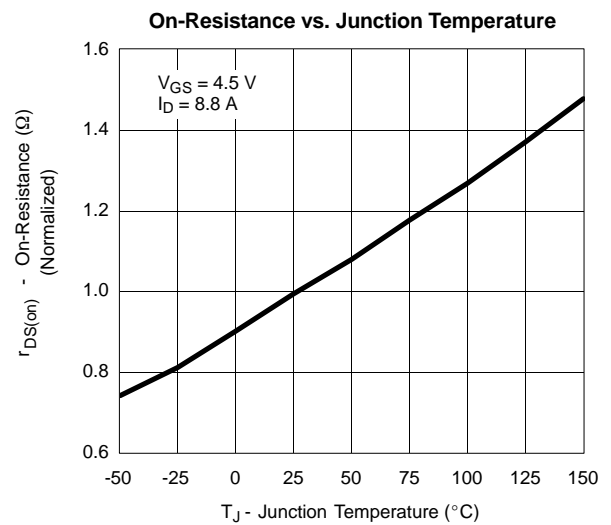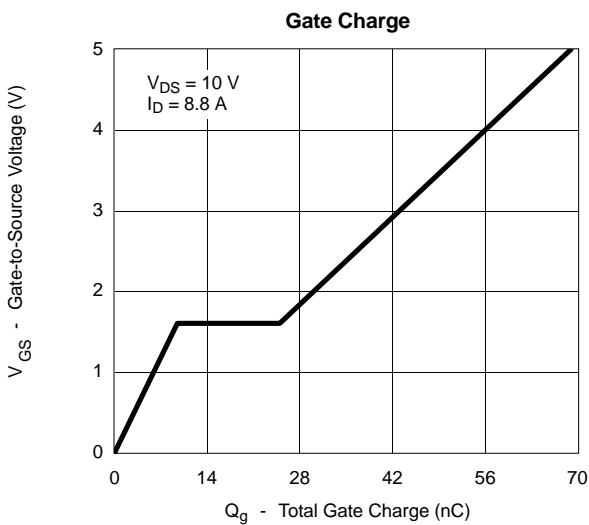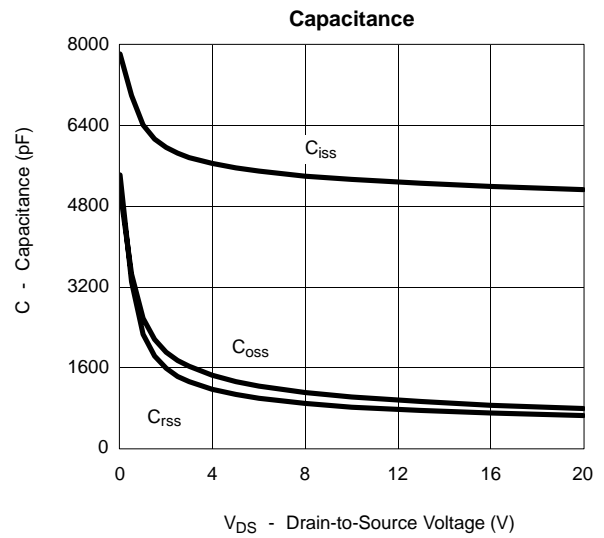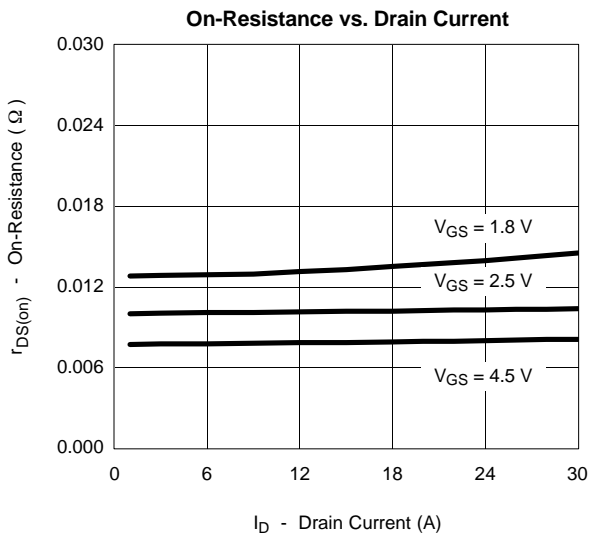

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

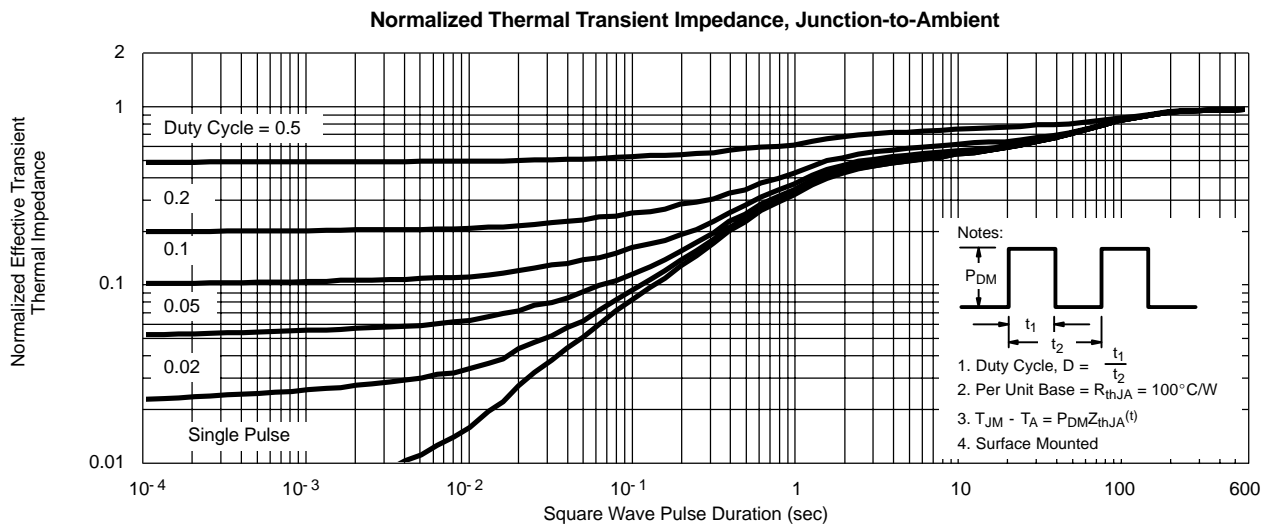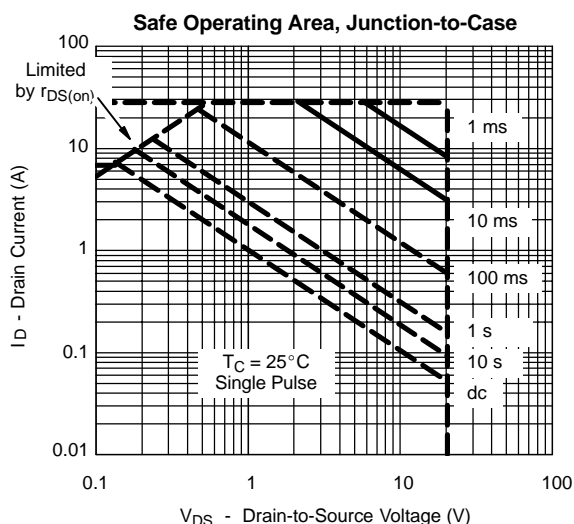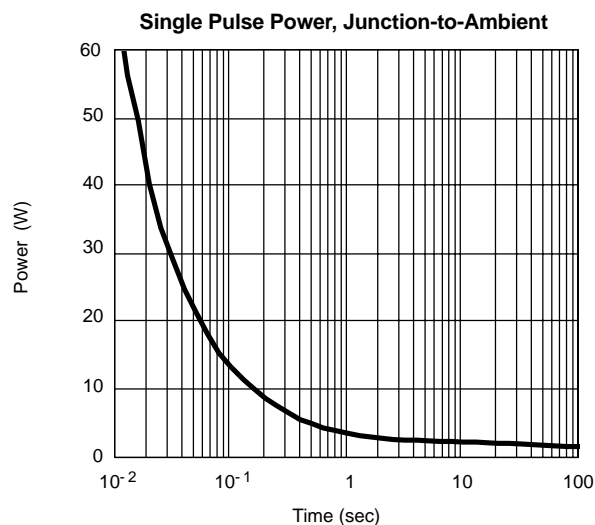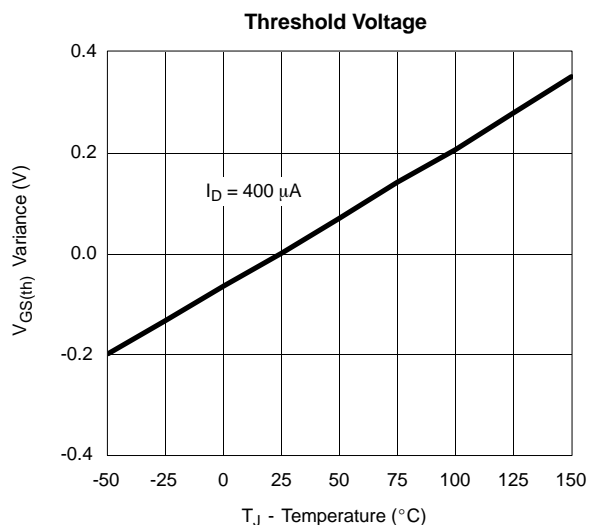



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

