



**FRONTIER  
ELECTRONICS CO., LTD.**

**SF60-005G  
THRU  
SF60-06G**


**6A GLASS PASSIVATED SUPER FAST RECOVERY RECTIFIER**

**FEATURES**

- SUPER FAST SWITCHING
- LOW FORWARD VOLTAGE
- HIGH CURRENT CAPABILITY
- HIGH SURGE CAPABILITY
- HIGH RELIABILITY
- GLASS PASSIVATED CHIP JUNCTION

**MECHANICAL DATA**

- CASE : MOLDED PLASTIC
- EPOXY : UL 94V-0 MOLDING COMPOUND
- LEAD : MIL-STD-202E, METHOD 208C GUARANTEED
- MOUNTING POSITION : ANY
- WEIGHT : 1.2 GRAMS

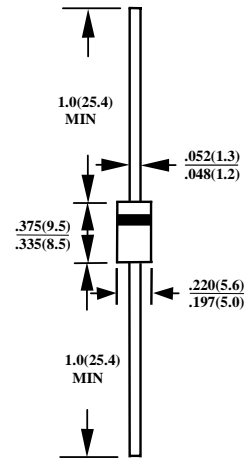

CASE : DO201AD  
DIMENSIONS IN INCHES AND (MILLIMETERS)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**  
RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED  
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD.  
FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	SF60 -005G	SF60 -01G	SF60 -015G	SF60 -02G	SF60 -03G	SF60 -04G	SF60 -05G	SF60 -06G	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V <sub>RRM</sub>	50	100	150	200	300	400	500	600	V
MAXIMUM RMS VOLTAGE	V <sub>RMS</sub>	35	70	105	140	210	280	350	420	V
MAXIMUM DC BLOCKING VOLTAGE	V <sub>DC</sub>	50	100	150	200	300	400	500	600	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT .375" (9.5mm) LEAD LENGTH AT TA=55°C	I <sub>O</sub>	6.0								A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I <sub>FSM</sub>	150								A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C <sub>J</sub>	170								PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	R <sub>θja</sub>	30								°C/W
STORAGE TEMPERATURE RANGE	T <sub>STG</sub>	- 55 TO + 150								°C
OPERATING TEMPERATURE RANGE	T <sub>OP</sub>	- 55 TO + 150								°C

**ELECTRICAL CHARACTERISTICS (A<sub>T</sub> T<sub>A</sub> =25°C UNLESS OTHERWISE NOTED)**

CHARACTERISTICS	SYMBOL	SF60 -005G	SF60 -01G	SF60 -015G	SF60 -02G	SF60 -03G	SF60 -04G	SF60 -05G	SF60 -06G	UNITS	
MAXIMUM FORWARD VOLTAGE AT I <sub>O</sub> DC	V <sub>F</sub>	0.95			1.25		1.85			V	
MAXIMUM REVERSE CURRENT AT 25°C	I <sub>R</sub>	10									μA
MAXIMUM REVERSE CURRENT AT 100°C	I <sub>R</sub>	100									μA
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	T <sub>RR</sub>	35									nS

- NOTE : 1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS  
2. BOTH LEADS ATTACHED TO HEATSINK 30x30x1t(mm) COPPER PLATE AT LEAD LENGTH 5mm  
3. REVERSE RECOVERY TEST CONDITIONS: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A

# RATINGS AND CHARACTERISTIC CURVE SF60-005G THRU SF60-06G

FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

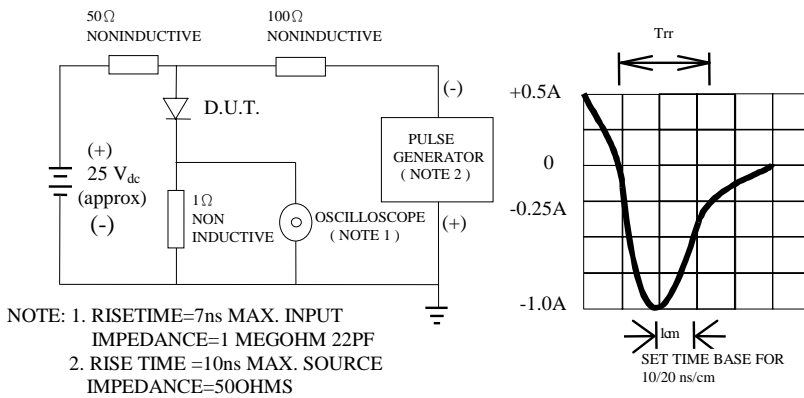


FIG. 2-TYPICAL FORWARD CURRENT DERATING CURVE

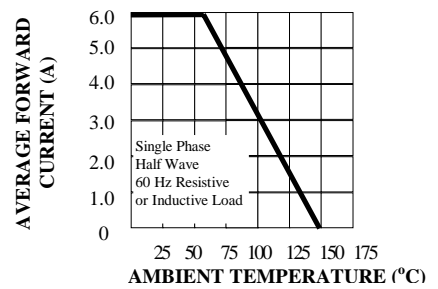


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

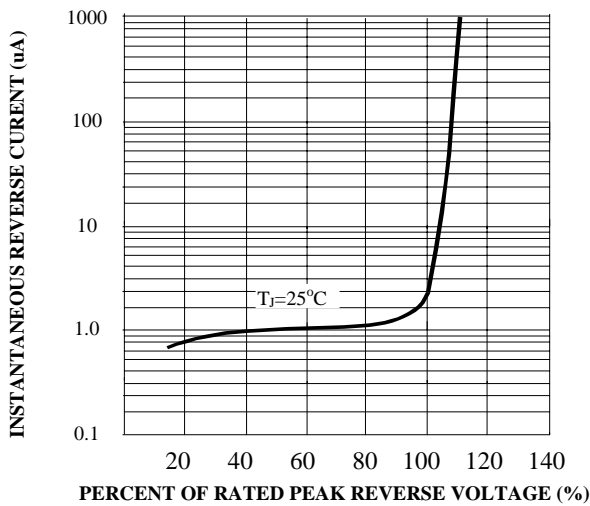


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

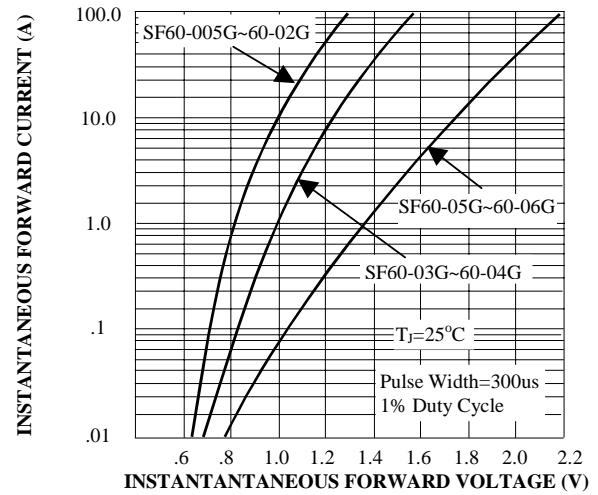


FIG. 5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

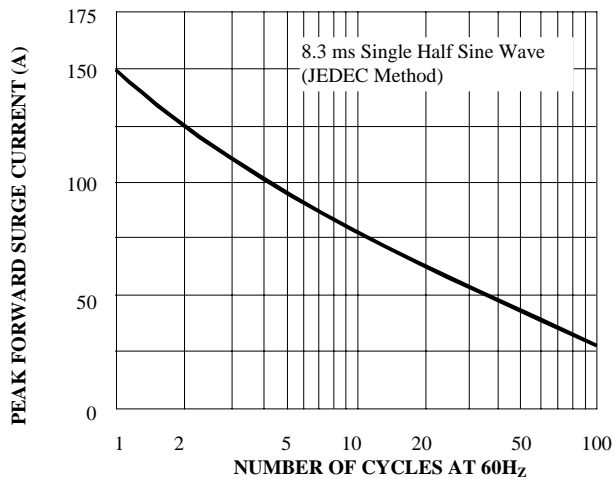


FIG. 6-TYPICAL JUNCTION CAPACITANCE

