




SPACE TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator,
General Specification (rev 18 January 2010)

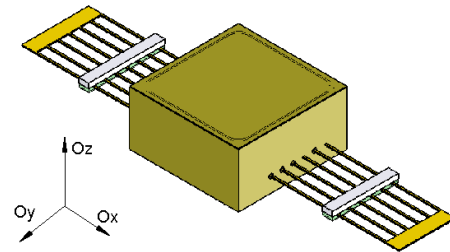

▣ Features	2
▣ Applications	2
▣ Environmental conditions	2
▣ Mechanical characteristics	3
▣ Performance Characteristics	4
▣ Proposed Components quality levels	5
▣ Screening options according to MIL PRF55310	5
▣ Model philosophy	6
▣ Standard Tests	7
▣ Ordering part number definition	8



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

▣ Features

- Frequency Range : 10MHz to 150 MHz
- Supply Voltage : +5V or +12V
- Low Consumption : 20 mA max
- Frequency Stability vs. Operating Temperature : from +/- 0.5ppm to +/- 2ppm
- Ageing :from +/- 2ppm to +/- 10ppm over 15 years
- Output Wave Form : sine 50 Ohms
- Output Level : from 0 to 8 dBm
- Manufacturing in accordance with:
 - MIL-PRF-55310 (Class 1, type 4, level S,B)
 - ECSS-Q-ST-70-08C and ECSS-Q-ST-70-38C

▣ Applications

- Transponders
- GPS receivers
- Converters
- Board calculators
- Synthesizers
- FGU

▣ Environmental conditions

Parameters	Unit	Minimum	Typical	Maximum
Operating temperature range	°C	- 40		+ 85
Storage temperature range	°C	- 55		+ 125
Shocks (half sine)		1500g, 0.35ms		
Sine vibration		20g as per MIL-STD-202, Method 204, Condition D		
Random vibration		37.8 grms as per MIL-STD-202, Method 214, Condition I-J		
Radiation		Up to 100 krad total dose		



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

▣ Mechanical characteristics

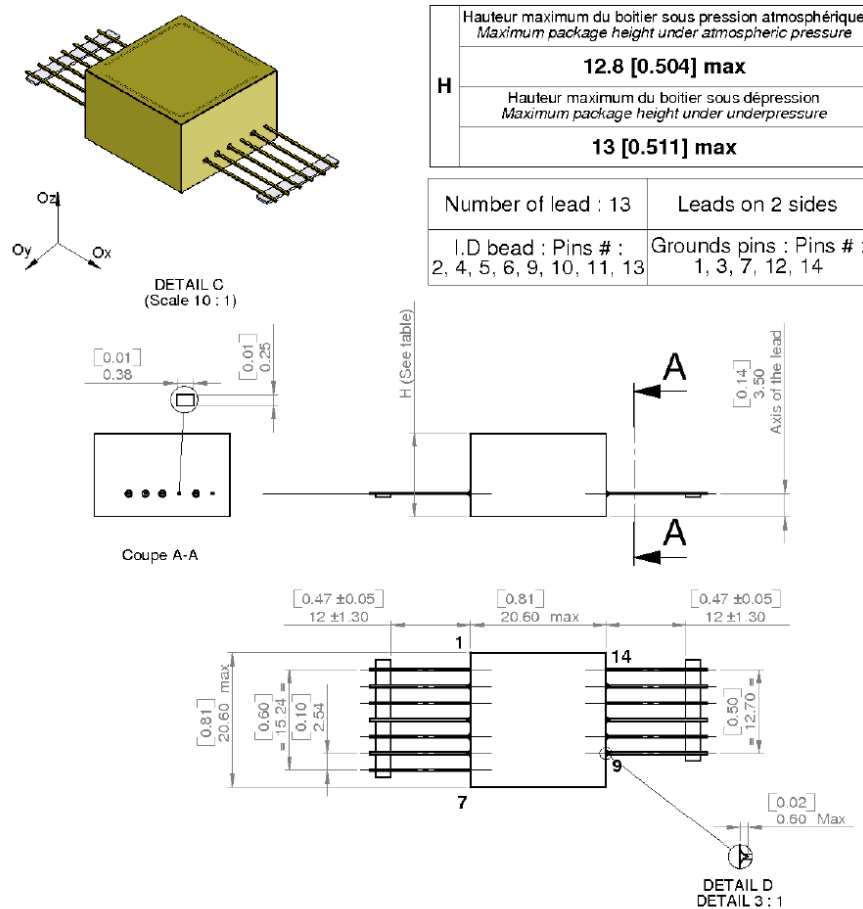


Figure 1 : Oscillator outline 1

Pin description

Pin number	Name	Function
6	Adj	External Adjustment Resistor
4-5-9-10-11	NC	
1-3-7-12-14	GND	Electrical & Mechanical ground
2	Vcc	Power supply
13	Fout	Frequency Output



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

▣ Performance Characteristics

Electrical Parameters	Unit	Minimum	Typical	Maximum
Frequency output				
Nominal frequency range	MHz	10	40	150
Output level (50 Ω load)	dBm	0		8
Harmonics level	dBc			-30
Spurious (offset > 50 Hz)	dBc			-80
Phase noise in static conditions @ 40 MHz				
@ 1 Hz offset	dBc/Hz		-65	-55
@ 10 Hz offset	dBc/Hz		-95	-85
@ 100 Hz offset	dBc/Hz		-125	-115
@ 1 kHz offset	dBc/Hz		-145	-135
@ 10 kHz offset or greater	dBc/Hz		-155	-150
Allan variance				
@ 1s	ppb			1
Free running mode				
Initial setting	ppm			±1
Stability vs. temperature	ppm	±0.5	±1	±2
Stability vs. 5 % supply voltage variation	ppm			0.1
Stability vs. 10 % load variation	ppm			0.1
Aging over first year	ppm	0.5		1
Aging over 15 years	ppb	5		10
Frequency adjustment with external resistor				
Relative pulling frequency range	ppm	±5		
Resistor value range	Ω	0		10k
Supply voltage (Vcc pin)				
Voltage range (±5%)	V _{DC}	5		12
Supply power	W			0.2
Start up conditions				
Start up time	ms			10
Cold start	°C			-40



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

Proposed Components quality levels

- Full ESA ECSS-Q-ST-60C components
- Full ESA ECSS-Q-ST-60C components with specific radiation test
- ESA ECSS-Q-ST-60C components with only LVT 3

▣ Screening options according to MIL PRF55310

- Full Level S
- Level S with combined burn in aging of 480 hours
- Full Level B
- Level B with combined burn in aging of 480 hours



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

▣ Model philosophy

Representativeness	DM	EM	EQM	QM	FM	FM-C
Component	Commercial parts	Passive commercial parts Active parts from the same manufacturer of HiRel parts	Mil Grade parts procured from the same manufacturer of HiRel parts	HiRel Parts	HiRel Parts	HiRel Parts
Crystal material	HiQ	HiQ	HiQ	Swept ESA-SCC3501	Swept ESA-SCC3501	Swept ESA-SCC3501
Resonator stabilized	Not stabilized	Stabilized	Stabilized	Stabilized & Aged as per specification	Stabilized & Aged as per specification	Stabilized & Aged as per specification
Mechanical interface	Size & shape could not be representative	Flight representative in form-fit-function	Flight representative in form-fit-function	Flight design	Flight design	Flight design
Electrical interface	Total conformity with functional electrical	Flight design without HiRel parts	Flight design without HiRel parts	Flight design	Flight design	Flight design
Other tests	Development testing	Partial functional qualification testing	Functional Qualification testing & Environment	Qualification testing	Acceptance testing	Acceptance testing + group C
Workmanship	IPC610	IPC610	ECSS-Q-70-08 & 70-38	ECSS-Q-70-08 & 70-38	ECSS-Q-70-08 & 70-38	ECSS-Q-70-08 & 70-38



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

Standard Tests

DOCxxxFM S520-A1	SN/YYWW		Initial Tests	Pre-Burn-in Measurements	Frequency aging group B	Final tests Group A	Visual tests group A
CONDITIONS		PARAMETERS	GO NO-GO	GO NO-GO	GO NO-GO	GO NO-GO	GO NO-GO
24°C ±2°C		Frequency	GO	GO	GO	GO	NA
24°C ±2°C		Output level	GO	GO	NA	GO	NA
-20°C ±2°C		Output level	GO	NA	NA	GO	NA
70°C ±2°C		Output level	GO	NA	NA	GO	NA
-20°C to +70°C		Output level vs. Temperature	GO	NA	NA	GO	NA
-20°C ±2°C		start up Time	GO	NA	NA	GO	NA
+70°C ±2°C		Steady state consumption	GO	NA	NA	GO	NA
24°C ±2°C		Steady state consumption	GO	GO	NA	GO	NA
-20°C ±2°C		Steady state consumption	GO	NA	NA	GO	NA
24°C ±2°C		Harmonics	GO	NA	NA	GO	NA
24°C ±2°C		Non Harmonics	GO	NA	NA	GO	NA
24°C ±2°C		Phase noise	GO	NA	NA	GO	NA
24°C ±2°C		Frequency vs. load variation	GO	NA	NA	GO	NA
24°C ±2°C		Frequency vs. power variation	GO	NA	NA	GO	NA
24°C ±2°C		Frequency Adjustment	GO	NA	NA	GO	NA
-40°C		Cold start	GO	NA	NA	GO	NA
		Dimensions	NA	NA	NA	NA	GO
		Marking	NA	NA	NA	NA	GO
		Weight	NA	NA	NA	NA	GO
-20°C to 70°C		Frequency vs. Temperature	GO	NA	NA	GO	NA



TCXO Series 300

Space qualified TCXO – Temperature Compensated Crystal Oscillator
General Specification

January 18th 2010

Ordering part number definition

The part number breakdown is defined as follows:

