

E-Series I/Q Demodulator
9 – 11 MHz

EKIN2-10D
V2


Features

- Excellent Phase and Amplitude Balance
- LO Power + 10 dBm Typical
- Surface Mount
- Tape and reel packaging available

Description

M/A-COM's EKIN2-10D is an I/Q Demodulator. Ideally suited for Direct Demodulation in Cellular Base Stations. Typical system applications include GSM, DCS1800, W-CDMA, and PCS air interfaces. Parts are packaged in tape & reel.

SM - 28 Package

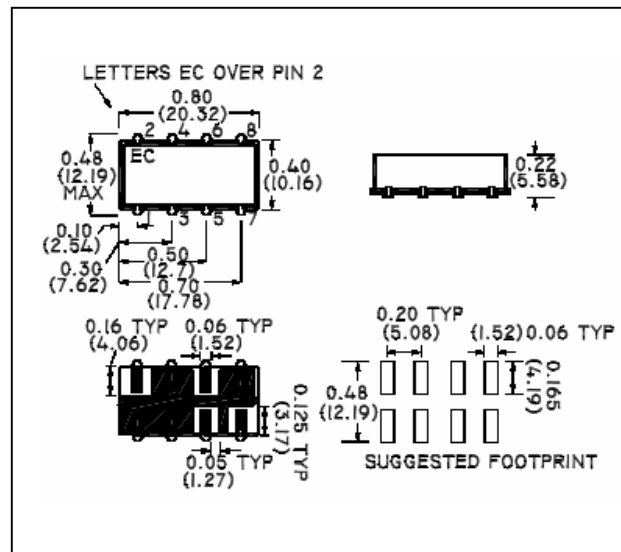

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
LO & RF Frequency	—	9 - 11	MHz	—	—	—
Amplitude Unbalance	—	9 - 11	dB	—	0.2	0.4
Phase Unbalance	—	9 - 11	Degrees	—	1.5°	3°
3 * I/Q	—	9 - 11	dB	—	50	35
Conversion Loss	—	9 - 11	dB	—	6.0	7.0
(LO) Carrier Power	—	9 - 11	dBm	—	+10	—
LO VSWR	—	9 - 11	Ratio	—	4.5:1	—
RF VSWR	—	9 - 11	Ratio	—	1.1:1	—
I VSWR	—	9 - 11	Ratio	—	1.3:1	—

* $Q = -90^\circ$ for RF < LO

Ordering Information

Part Number	Package
EKIN2-10DTR	Tape and Reel (300 piece Reel)

E-Series I/Q Demodulator
9 – 11 MHz

EKIN2-10D
V2

Absolute Maximum Ratings ¹

Parameter	Absolute Maximum
DC Offset Voltage	1 mV Typical
RF Power (1 dB Compression)	4 dBm Maximum
Impedance	50 Ohms Nominal
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C


1. Operation of this device above any one of these parameters may cause permanent damage.

Pin Configuration


Pin No.	Function
1	LO
2	Case Ground
3	Case Ground
4	Case Ground
5	I
6	Q
7	Case Ground
8	RF

Typical Performance Curves


Phase Unbalance

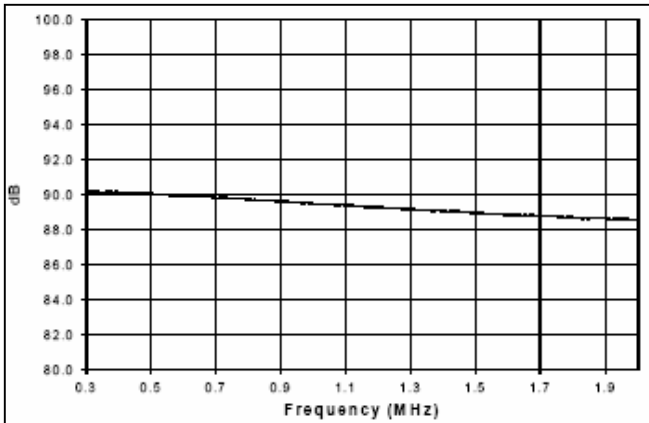


Amplitude Unbalance

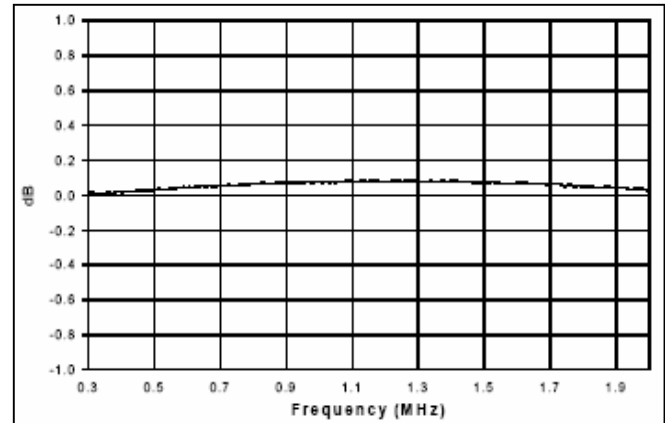

LO VSWR

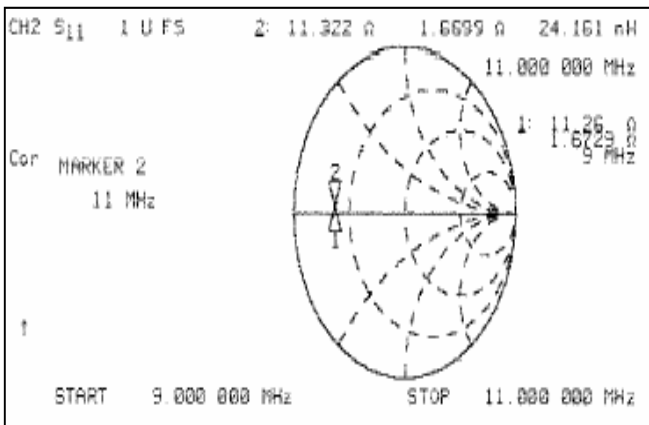


RF VSWR

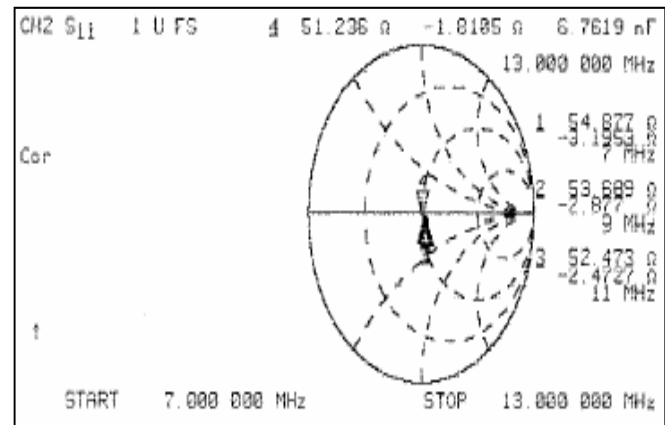

Typical Performance Curves

I VSWR

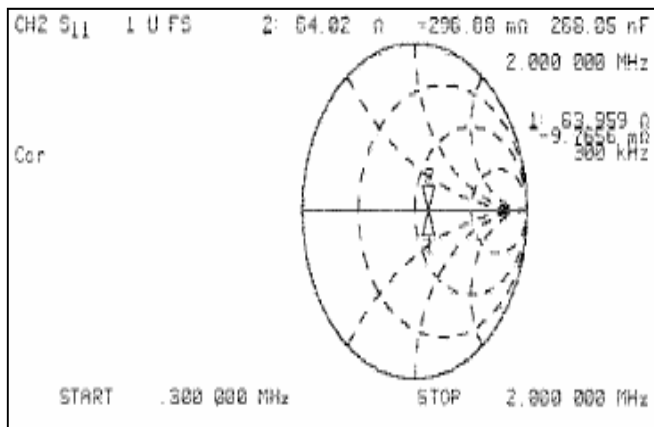

Q VSWR

