

## E-Series I/Q Demodulator 380 - 400 MHz




### Features

- Excellent Phase and Amplitude Balance
- LO Power +10 dBm Typical
- Surface Mount



### SM-92 Package

Note: Non Hermetic Package

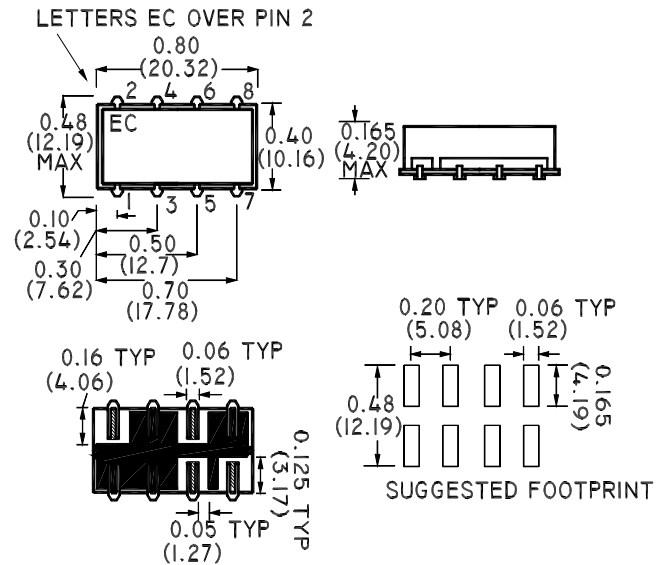

### Description

M/A-COM's EKIN2-390DX1 is a passive, surface mount I/Q Demodulator. Ideally suited for Direct Demodulation in PMR/TETRA applications.

### Electrical Specifications @25°C

Parameter	Units	Typical	Minimum	Maximum
Frequency Range	LO / RF	380 - 400	—	—
	I/Q	DC - 1	—	—
Amplitude Unbalance	dB	0.5	—	1.0
Phase Unbalance	Degrees	2.0	—	3.0
Isolation	LO to RF	55	40	—
	LO to I/Q	42	40	—
Conversion Loss	dB	6.4	—	8.0
(LO) Carrier Power	dBm	+10 ± 1	—	±1

**Absolute Maximum Ratings**


Parameter	Absolute Maximum
Operating Temperature	-10°C to +70°C
Storage Temperature	-55°C to +100°C
Impedance	50 Ohms Nominal
RF Power (1dB Compression)	4 dBm Max

**Functional Configuration**


Function	Pin No.
LO	1
RF	8
I	5
Q	6
External 50 Ohms	—
Case Ground	3,4,7
Not Connected	2

**Typical Performance @ +25°C**

**Amplitude Unbalance**

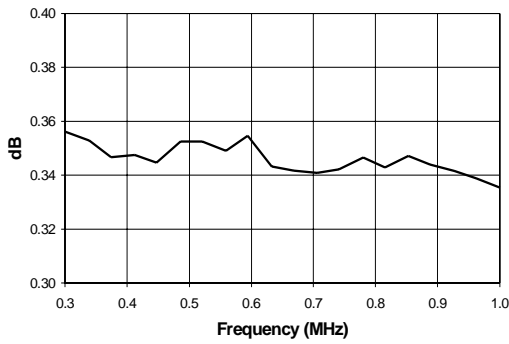

**Phase Unbalance**

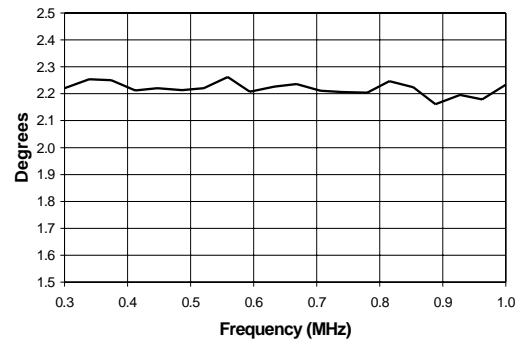

V2.00 S 1376 C



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel.+85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

[www.macom.com](http://www.macom.com)

AMP and Connecting at a Higher Level are trademarks.  
Specifications subject to change without notice.

