


TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +100 degrees C
Vcc Voltage, Vdc	+13.0
Vtune Voltage, Vdc	+16.0
DC Voltage applied to RF out	+/- 25

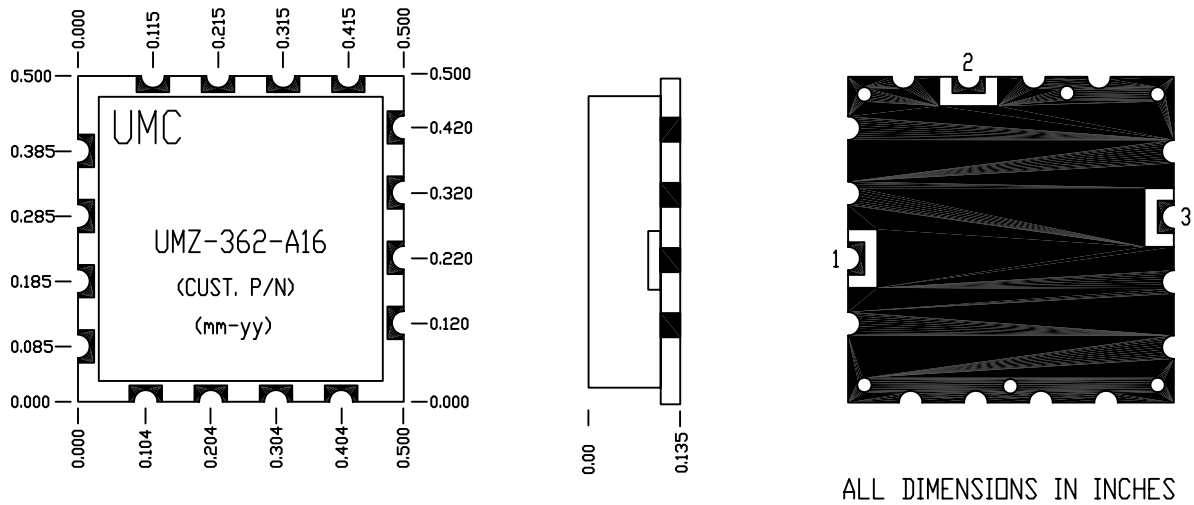

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation  
Proprietary Document

Prepared by: M.Banks 08/27/03

Universal Microwave Corporation  
2339 Destiny Way  
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL  
DRAWING FOR UMZ-362-A16

SIZE  
A

FSCM NO.

DWG NO.

UP-362

REV  
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	300	--	400
Power Output, dBm	+8.0	+10.0	+12.0
Harmonics, dBc	--	-30	-20
SSB Phase Noise, dBc/Hz			
@ Offset = 1kHz	--	-80	-75
@ Offset = 10kHz	--	-103	-98
@ Offset = 100kHz	--	-123	-120
@ Offset = 1MHz	--	-143	-140
@ Offset = 10MHz	--	-155	-152
Pushing, MHz/V	--	1.5	3.0
Pulling, MHz p-p, @12dBr, all phases	--	0.5	2.0
Tuning Voltage, Vdc	1		15
Tuning Sensitivity, MHz/V	--	16	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	1	2
@ +85 degrees C, MHz	--	1	2
Supply Voltage, Vdc	--	12	--
Supply Current, mA <sub>dc</sub>	--	15	18
Output Power @ V <sub>tune</sub> = 0 and 15V	+6.0	--	--
Tuning Port Capacitance, pF	--	330	--
3dB Modulation Bandwidth, kHz	--	100	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified, dimensions are in inches  Universal Microwave Corporation Proprietary Document	Universal Microwave Corp. SPECIFICATION CONTROL DRAWING FOR UMZ-362-A16			
	Prepared by: M.BANKS 08/27/03	SIZE A	FSCM NO.	DWG NO. UP-362
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE: N/A		SHEET 2 OF 2	