

## 1N746A - 1N759A

**V<sub>Z</sub>** : 3.3 to 12V

**P<sub>D</sub>** : 500mW

### FEATURES :

- Silicon planar power zener diodes.
- Standard zener voltage tolerance is  $\pm 5\%$
- Other tolerances are available upon request.
- Pb / RoHS Free


### MECHANICAL DATA :

Case: DO-35 Glass Case

Weight: approx. 0.13g

## ZENER DIODES

### DO - 35 Glass (DO-204AH)

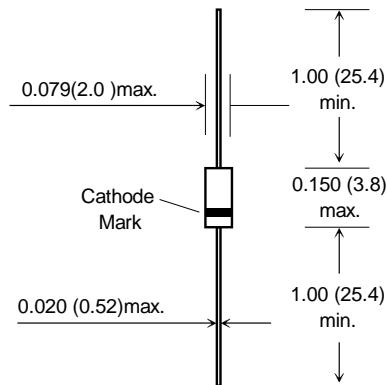

Dimensions in inches and ( millimeters )

### Maximum Ratings and Thermal Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Maximum Forward Voltage at I <sub>F</sub> = 200 mA.	V <sub>F</sub>	1.2	V
Power Dissipation at T <sub>L</sub> = 75°C	P <sub>D</sub>	500 <sup>(1)</sup>	mW
Thermal Resistance Junction to Ambient Air	R <sub>θJA</sub>	300 <sup>(2)</sup>	°C/W
Junction temperature	T <sub>J</sub>	175	°C
Storage temperature range	T <sub>S</sub>	-65 to + 150	°C

Notes:

(1) T<sub>L</sub> is measured 3/8" from body.

(2) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.

## ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Type	Nominal Zener Voltage $V_z$ @ $I_{ZT}$	Test Current $I_{ZT}$	Maximum Zener Impedance $Z_{ZT}$ @ $I_{ZT}$ <sup>(1)</sup>	Maximum Reverse Leakage Current $I_R$ <sup>(2)</sup> @ $V_R=1V$		Maximum DC. Zener Current $I_{zM}$
				Ta=25°C	Ta=150°C	
	(V)	(mA)	(Ω)	(μA)	(μA)	(mA)
1N746A	3.3	20	28	10	30	110
1N747A	3.6	20	24	10	30	100
1N748A	3.9	20	23	10	30	95
1N749A	4.3	20	22	2	30	85
1N750A	4.7	20	19	2	30	75
1N751A	5.1	20	17	1	20	70
1N752A	5.6	20	11	1	20	65
1N753A	6.2	20	7	0.1	20	60
1N754A	6.8	20	5	0.1	20	55
1N755A	7.5	20	6	0.1	20	50
1N756A	8.2	20	8	0.1	20	45
1N757A	9.1	20	10	0.1	20	40
1N758A	10	20	17	0.1	20	35
1N759A	12	20	30	0.1	20	30

Notes :

(1) The Zener impedance is derived from the 1 kHz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current ( $I_{ZT}$ ) is superimposed on  $I_{ZT}$ . Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

(2) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.

(3) The type number listed have a standard tolerance on the nominal zener voltage of  $\pm 5.0\%$ .