


## Dual Common-Cathode Schottky Rectifier



### FEATURES

- Guarding for overvoltage protection
- Low power losses, high efficiency
- Low forward voltage drop
- High forward surge capability
- High frequency operation
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

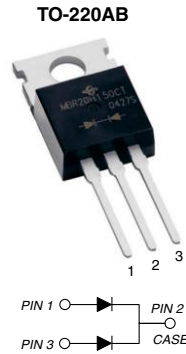

### TYPICAL APPLICATIONS

For use in low voltage, high frequency rectifier of switching mode power supplies, free-wheeling diodes, oring diodes, dc-to-dc converters or polarity protection applications.

MAJOR RATINGS AND CHARACTERISTICS	
$I_{F(AV)}$	30 A x 2
$V_{RRM}$	35 V to 60 V
$I_{FSM}$	320 A
$V_F$	0.51 V, 0.56 V
$T_j \text{ max}$	150 °C

### MECHANICAL DATA

**Case:** TO-220AB

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D  
E3 suffix for commercial grade

**Polarity:** As marked

**Mounting Torque:** 10 in-lbs maximum

MAXIMUM RATINGS ( $T_A = 25\text{ °C}$ unless otherwise noted)					
PARAMETER	SYMBOL	M6035C	M6045C	M6060C	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	35	45	60	V
Maximum average forward rectified current (Fig. 1) Total device per diode	$I_{F(AV)}$	60 30			A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode	$I_{FSM}$	320			A
Peak repetitive reverse current at $t_p = 2.0\ \mu\text{s}$ , 1 kHz per diode	$I_{RRM}$	1.0			A
Voltage rate of change (rated $V_R$ )	dv/dt	10000			V/ $\mu\text{s}$
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 150			°C

ELECTRICAL CHARACTERISTICS ( $T_A = 25\text{ °C}$ unless otherwise noted)							
PARAMETER	TEST CONDITION	SYMBOL	M6035C	M6045C	M6060C		UNIT
			Typ.	Max.	Typ.	Max.	
Instantaneous forward voltage per diode (1)	at $I_F = 10\text{ A}$ , $I_F = 20\text{ A}$ , $T_j = 25\text{ °C}$ $I_F = 30\text{ A}$ ,	$V_F$	0.42	-	0.43	-	V
			0.49	-	0.52	-	
	0.55		0.61	0.59	0.65		
	at $I_F = 10\text{ A}$ , $I_F = 20\text{ A}$ , $T_j = 125\text{ °C}$ $I_F = 30\text{ A}$ ,		0.31	-	0.33	-	
0.42		-	0.47	-			
0.51		0.56	0.56	0.61			
Reverse current per diode (1)	at $V_R$ $T_j = 25\text{ °C}$ $T_j = 125$	$I_R$	140	700	180	700	$\mu\text{A}$
			106	175	140	175	mA
Typical junction capacitance	at 4.0 V, 1 MHz	$C_J$	1170	-	970	-	pF

**Note:**

(1) Pulse test: 300  $\mu\text{s}$  pulse width, 1 % duty cycle

# M6035C thru M6060C

Vishay General Semiconductor



THERMAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)					
PARAMETER	SYMBOL	M6035C	M6045C	M6060C	UNIT
Typical thermal resistance per diode	$R_{\theta JC}$	2.0			$^\circ\text{C/W}$

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
M6045C-E3/45	2.068	45	50/Tube	Tube

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

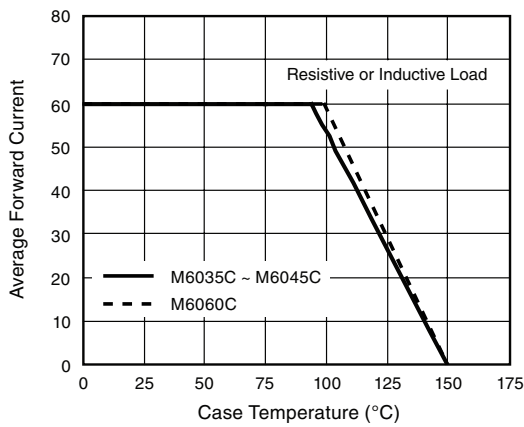


Figure 1. Maximum Forward Current Derating Curve

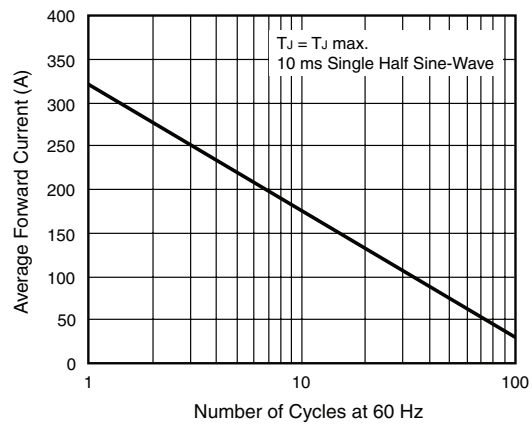


Figure 3. Maximum Non-Repetitive Peak Forward Surge Current Per Diode

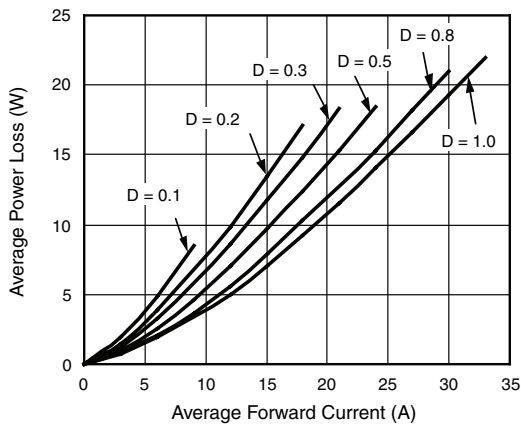


Figure 2. Forward Power Loss Characteristics Per Diode

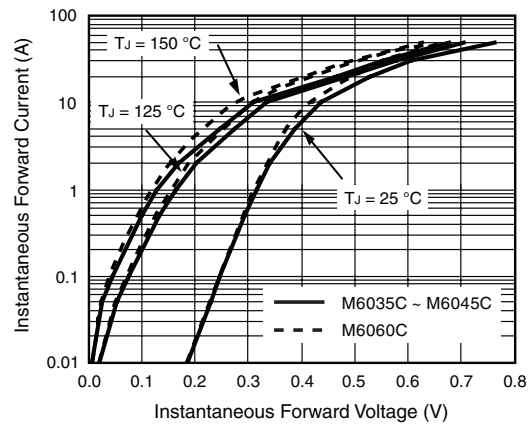


Figure 4. Typical Instantaneous Forward Characteristics Per Diode

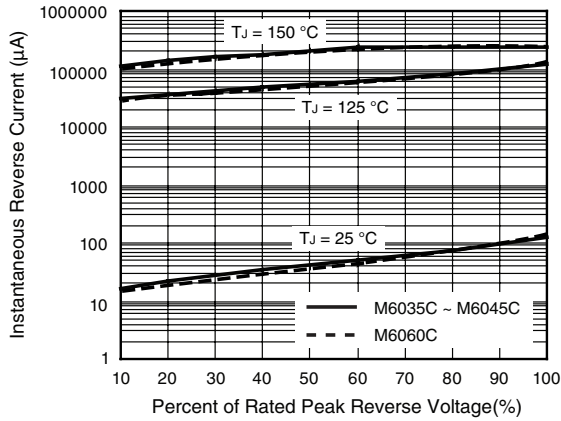


Figure 5. Typical Reverse Characteristics Per Diode

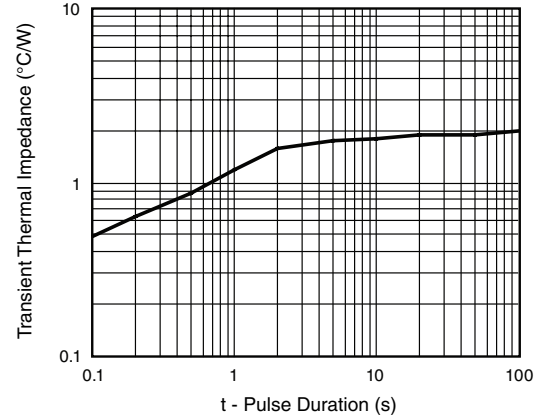


Figure 7. Typical Transient Thermal Impedance Per Diode


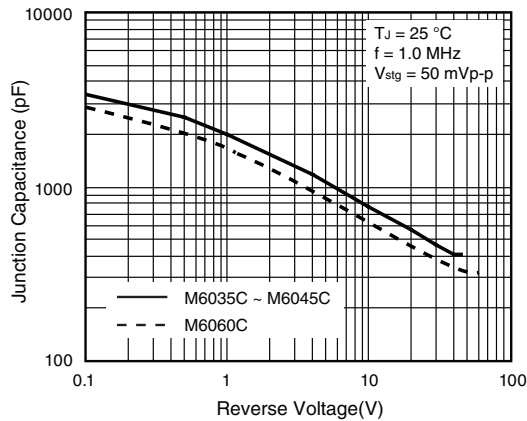


Figure 6. Typical Junction Capacitance Per Diode

**PACKAGE OUTLINE DIMENSIONS IN INCHES (MILLIMETERS)**



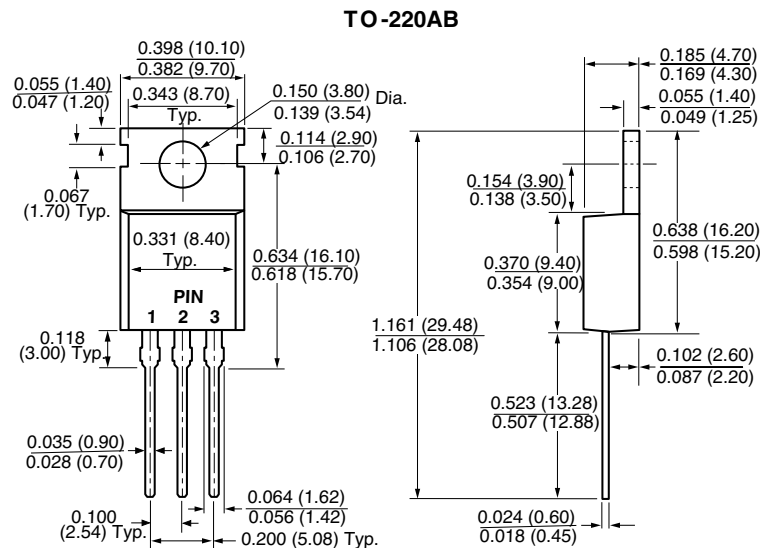

## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.