



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

S5AL THRU S5ML

5 Amp Silicon Rectifier 50 to 1000 Volts

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- For Surface Mount Applications
- Extremely Low Thermal Resistance
- High Current Capability
- High Temp Soldering: 260°C for 10 Seconds At Terminals
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL rating 1

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

| MCC Part Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-----------------|----------------|--|---------------------|-----------------------------|
| S5AL | S5A | 50V | 35V | 50V |
| S5BL | S5B | 100V | 70V | 100V |
| S5DL | S5D | 200V | 140V | 200V |
| S5GL | S5G | 400V | 280V | 400V |
| S5JL | S5J | 600V | 420V | 600V |
| S5KL | S5K | 800V | 560V | 800V |
| S5ML | S5M | 1000V | 700V | 1000V |


Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|---|-------------|-------------|---|
| Average Forward Current | $I_{F(AV)}$ | 5.0A | $T_a = 75^\circ\text{C}$ |
| Peak Forward Surge Current | I_{FSM} | 100A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage | V_F | 1.20V | $I_{FM} = 5.0A$; $T_a = 25^\circ\text{C}^*$ |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | I_R | 80µA 1mA | $T_a = 25^\circ\text{C}$ $T_a = 100^\circ\text{C}$ |
| Typical Junction Capacitance | C_J | 100pF | Measured at 1.0MHz, $V_R=4.0V$ |

*Pulse test: Pulse width 200 µsec, Duty cycle 2%


Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

DO-214AB (SMC) (LEAD FRAME)

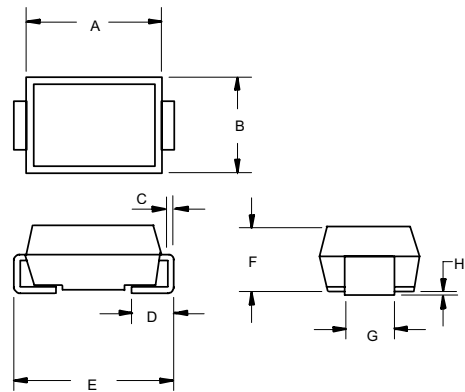

| DIM | INCHES | | MM | | NOTE |
|-----|--------|------|-------|-------|------|
| | MIN | MAX | MIN | MAX | |
| A | .260 | .280 | 6.60 | 7.11 | |
| B | .220 | .245 | 5.59 | 6.22 | |
| C | .006 | .012 | 0.15 | 0.31 | |
| D | .030 | .060 | 0.76 | 1.52 | |
| E | .305 | .320 | 7.75 | 8.13 | |
| F | .079 | .103 | 2.00 | 2.62 | |
| G | .108 | .128 | 2.75 | 3.25 | |
| H | .002 | .008 | 0.050 | 0.203 | |

SUGGESTED SOLDER PAD LAYOUT

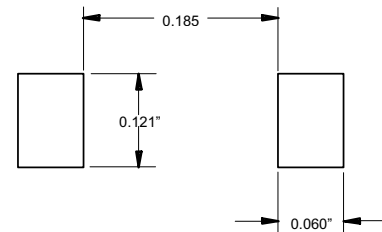


www.mccsemi.com

S5AL thru S5ML




Micro Commercial Components

Figure 1
Typical Forward Characteristics

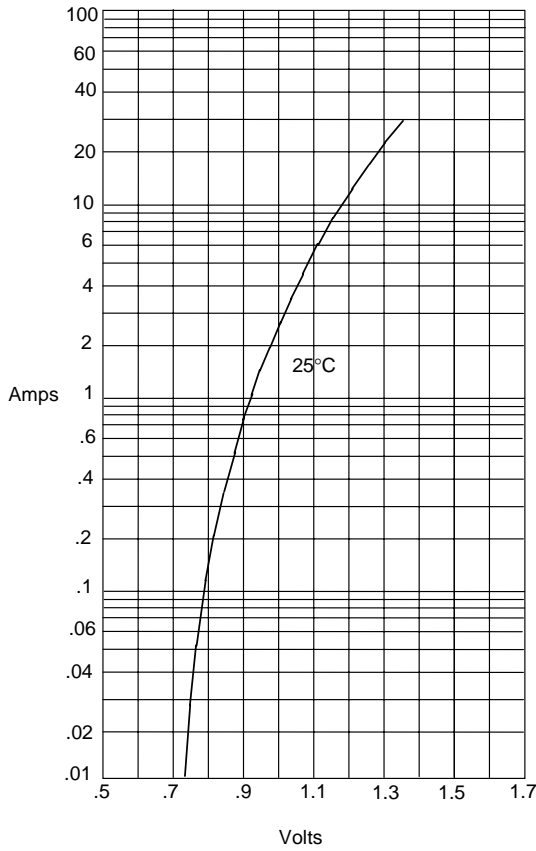


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

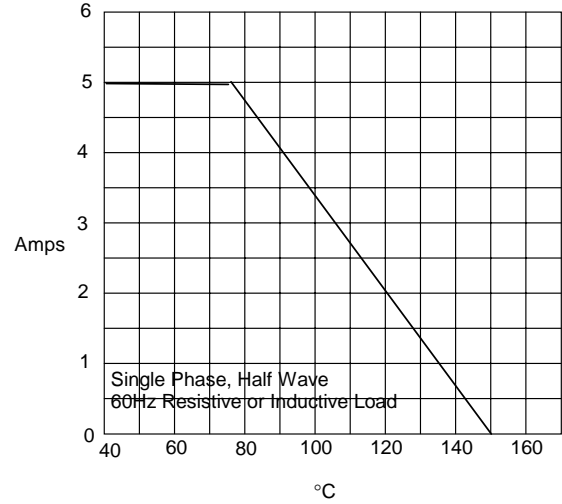

Average Forward Rectified Current - Amperes versus
Ambient Temperature - °C

Figure 3
Junction Capacitance

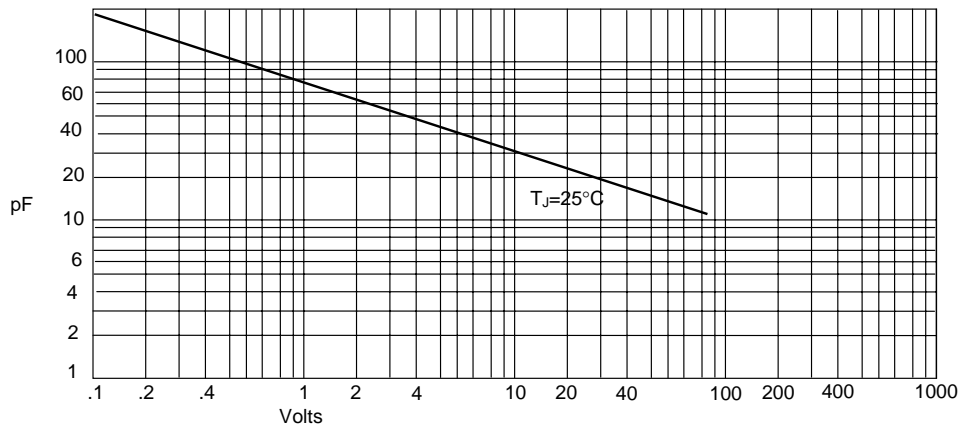

Junction Capacitance - pF versus
Reverse Voltage - Volts



Micro Commercial Components

Ordering Information

| | |
|------------------|----------------------|
| Device | Packing |
| (Part Number)-TP | Tape&Reel;3Kpcs/Reel |

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com