


**Damper diode
fast, high-voltage**

BY359-1500, BY359-1500S

FEATURES

- Low forward volt drop
- Fast switching
- Soft recovery characteristic
- High thermal cycling performance
- Low thermal resistance

SYMBOL

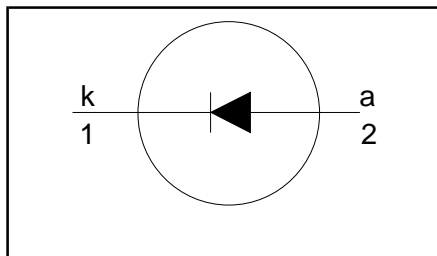

QUICK REFERENCE DATA

| |
|---|
| $V_R = 1500\text{ V}$ |
| $V_F \leq 1.8\text{ V} / 2\text{ V}$ |
| $I_{F(RMS)} = 15.7\text{ A}$ |
| $I_{FSM} \leq 60\text{ A}$ |
| $t_{rr} \leq 600\text{ ns} / 350\text{ ns}$ |

GENERAL DESCRIPTION


Glass-passivated double diffused rectifier diode featuring low forward voltage drop, fast reverse recovery and soft recovery characteristic. The device is intended for use in TV receivers and PC monitors.

The BY359 series is supplied in the conventional leaded SOD59 (TO220AC) package.

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | cathode |
| 2 | anode |
| tab | cathode |

SOD59 (TO220AC)

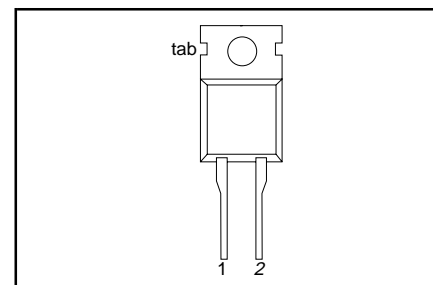

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|---------------|-------------------------------------|---|------|----------|------|
| V_{RSM} | Peak non-repetitive reverse voltage | | - | 1500 | V |
| V_{RRM} | Peak repetitive reverse voltage | | - | 1500 | V |
| V_{RWM} | Crest working reverse voltage | | - | 1300 | V |
| $I_{F(peak)}$ | Peak forward current | 16-32kHz TV 31-70kHz monitor | - | 10 7 | A |
| $I_{F(RMS)}$ | RMS forward current | BY359-1500 BY359-1500S | - | 15.7 | A |
| I_{FRM} | Peak repetitive forward current | sinusoidal; $a = 1.57$ | - | 60 | A |
| I_{FSM} | Peak non-repetitive forward current | $t = 10\text{ ms}$ $t = 8.3\text{ ms}$ sinusoidal; $T_j = 150\text{ °C}$ prior to surge; with reapplied $V_{RWM(max)}$ | - | 60 66 | A |
| T_{stg} | Storage temperature | | -40 | 150 | °C |
| T_j | Operating junction temperature | | - | 150 | °C |

THERMAL RESISTANCES

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------------|--|--------------|------|------|------|------|
| $R_{th\ j-mb}$ | Thermal resistance junction to mounting base | | - | - | 2.0 | K/W |
| $R_{th\ j-a}$ | Thermal resistance junction to ambient | in free air. | - | 60 | - | K/W |

Damper diode
fast, high-voltage

BY359-1500, BY359-1500S

STATIC CHARACTERISTICS



$T_j = 25\text{ }^\circ\text{C}$ unless otherwise stated

| SYMBOL | PARAMETER | CONDITIONS | BY359-1500 | | BY359-1500S | | UNIT |
|--------|-----------------|--|------------|------|-------------|------|---------------|
| | | | TYP. | MAX. | TYP. | MAX. | |
| V_F | Forward voltage | $I_F = 20\text{ A}$ | 1.3 | 1.8 | 1.5 | 2.0 | V |
| I_R | Reverse current | $I_F = 10\text{ A}; T_j = 150\text{ }^\circ\text{C}$ | 1.00 | 1.5 | 1.25 | 1.75 | V |
| | | $V_R = 1300\text{ V}$ | 10 | 100 | 10 | 100 | μA |
| | | $V_R = 1300\text{ V}; T_j = 100\text{ }^\circ\text{C}$ | 50 | 300 | 100 | 600 | μA |

DYNAMIC CHARACTERISTICS





$T_j = 25\text{ }^\circ\text{C}$ unless otherwise stated

| SYMBOL | PARAMETER | CONDITIONS | BY359-1500 | | BY359-1500S | | UNIT |
|----------|-------------------------------|--|------------|------|-------------|------|---------------|
| | | | TYP. | MAX. | TYP. | MAX. | |
| t_{rr} | Reverse recovery time | $I_F = 2\text{ A}; V_R \geq 30\text{ V}; -di_F/dt = 20\text{ A}/\mu\text{s}$ | 0.47 | 0.60 | 0.28 | 0.35 | μs |
| Q_s | Reverse recovery charge | | 1.6 | 2.0 | 0.70 | 0.95 | μC |
| V_{fr} | Peak forward recovery voltage | $I_F = 10\text{ A}; di_F/dt = 30\text{ A}/\mu\text{s}$ | 11.0 | - | 17.0 | - | V |

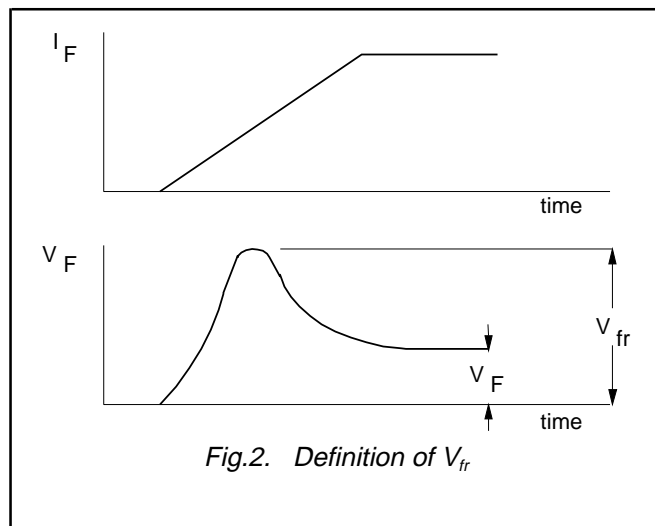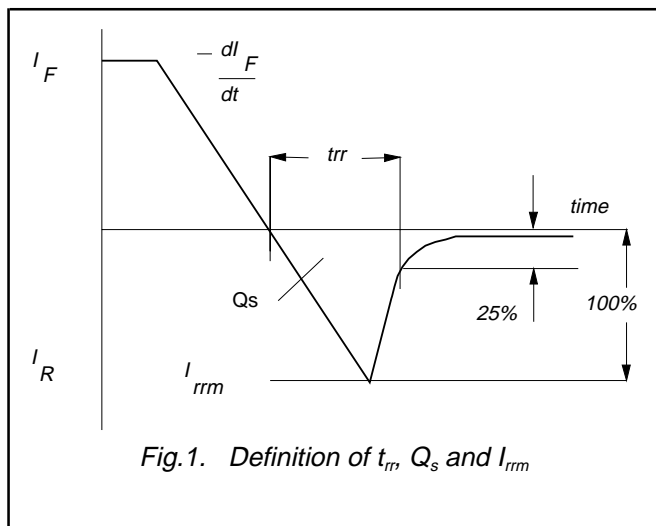

Damper diode
fast, high-voltage


BY359-1500, BY359-1500S

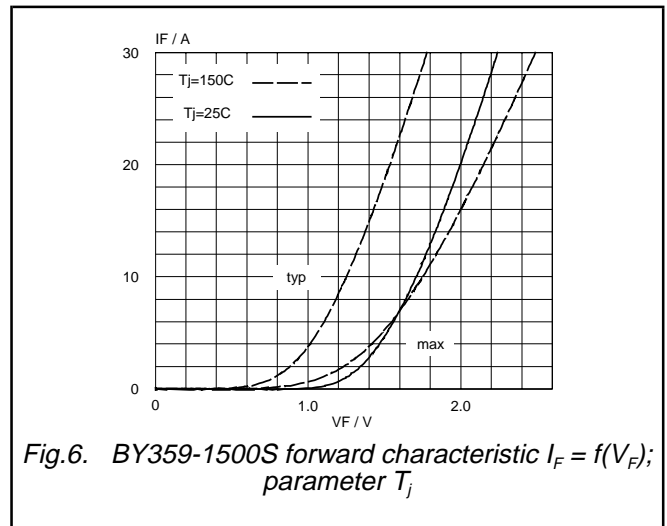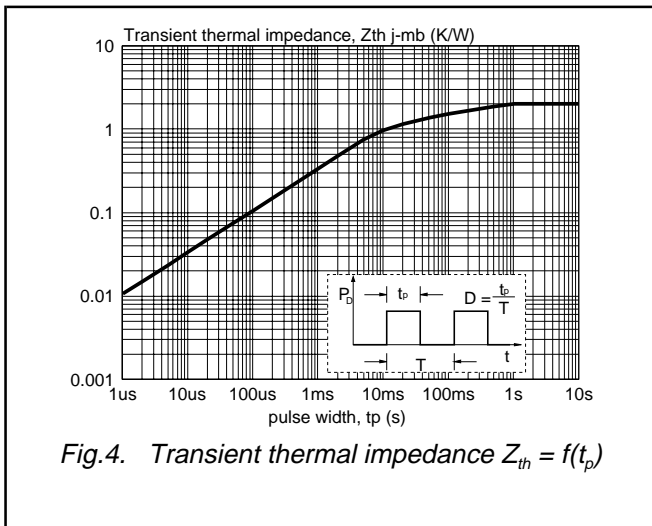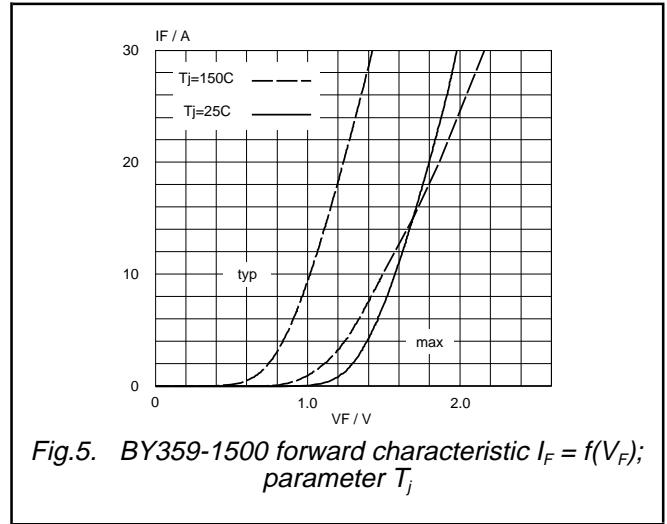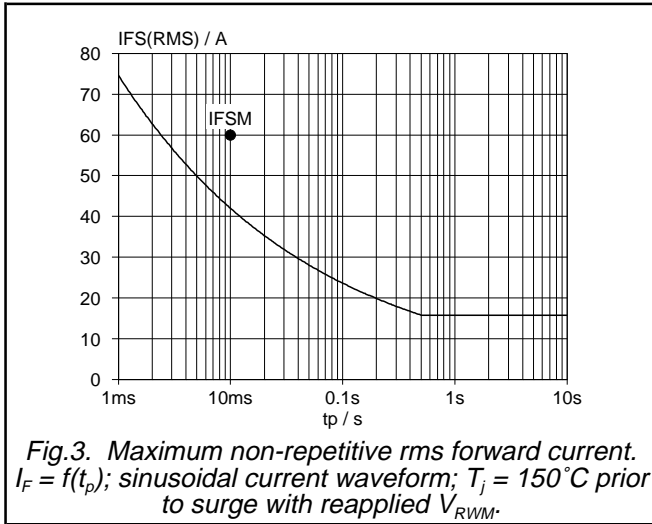

Damper diode
fast, high-voltage

BY359-1500, BY359-1500S

MECHANICAL DATA

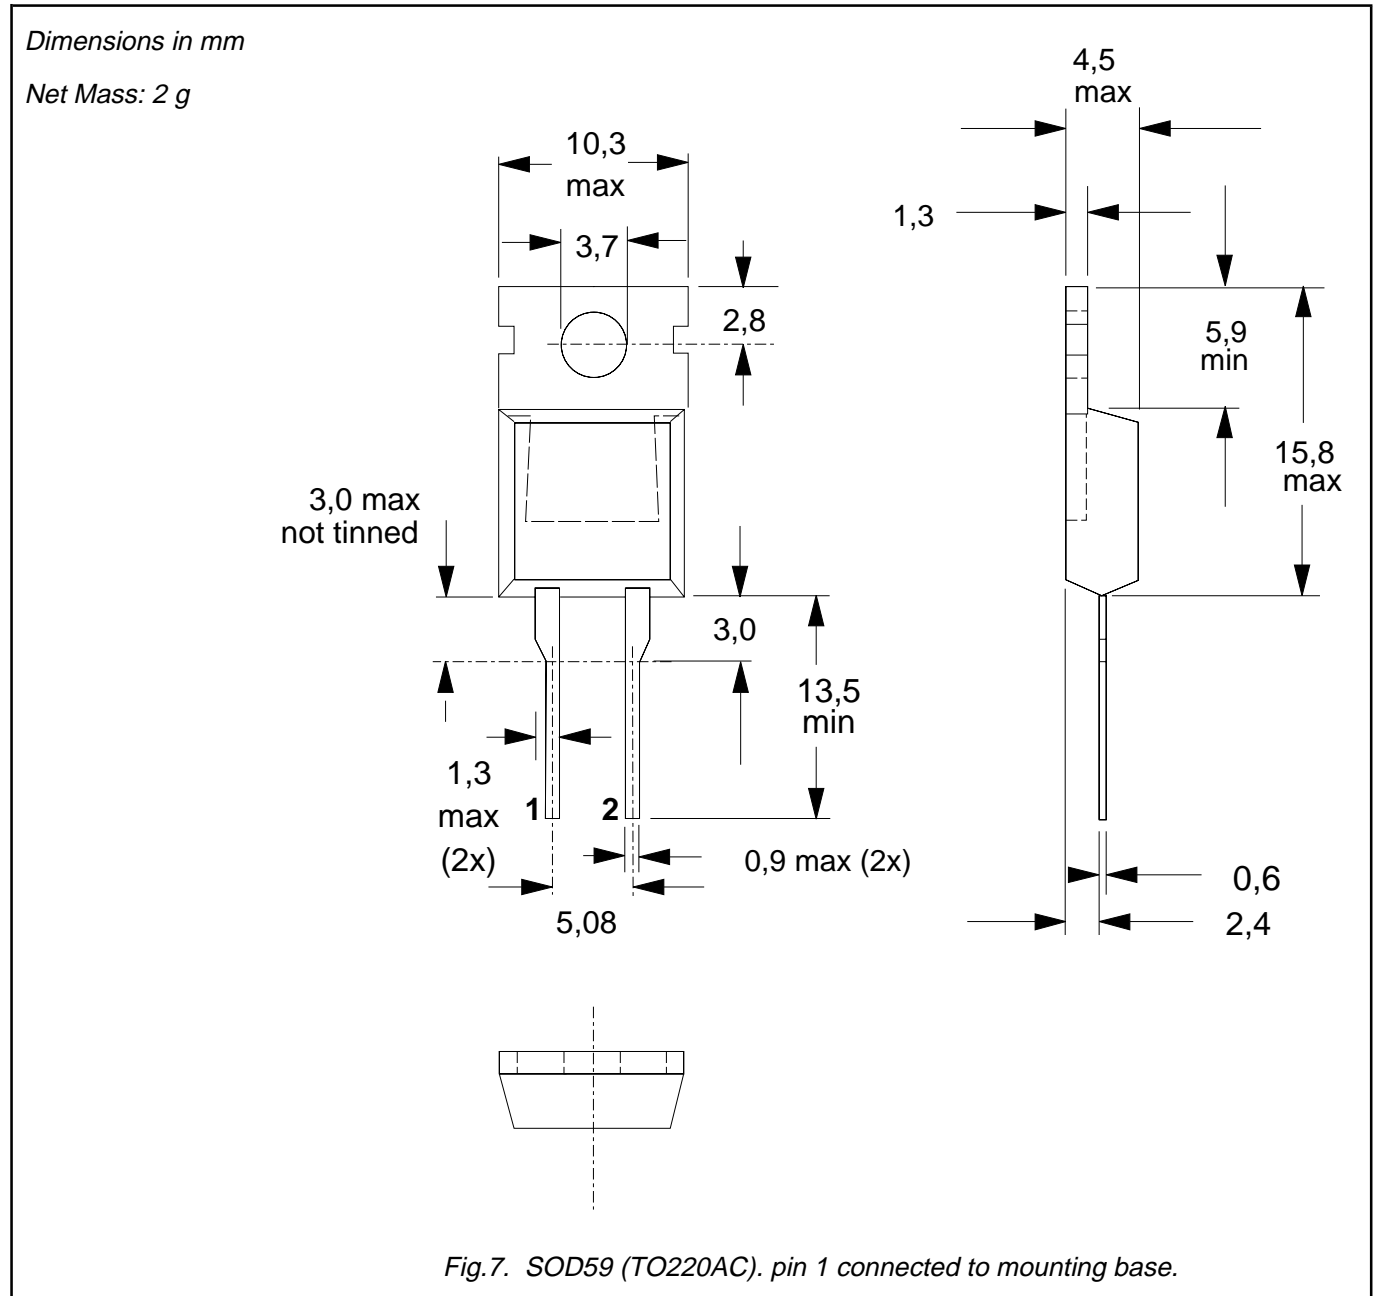

Notes

1. Refer to mounting instructions for TO220 envelopes.
2. Epoxy meets UL94 V0 at 1/8".

Damper diode
fast, high-voltage

BY359-1500, BY359-1500S

DEFINITIONS

| | |
|--|---|
| Data sheet status | |
| Objective specification | This data sheet contains target or goal specifications for product development. |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification | This data sheet contains final product specifications. |
| Limiting values | |
| Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability. | |
| Application information | |
| Where application information is given, it is advisory and does not form part of the specification. | |
| © Philips Electronics N.V. 1998 | |
| All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. | |
| The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights. | |

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.