


# Ultra Fast Recovery Rectifiers UF330 — UF350

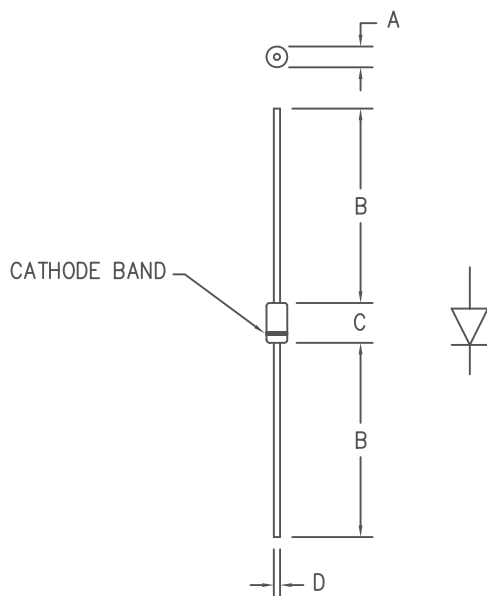

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.188	.260	4.78	6.50	Dia.
B	1.00	----	25.4	----	
C	.285	.375	7.24	9.52	
D	.046	.056	1.17	1.42	Dia.

PLASTIC D0201AD

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UF330	300V	300V
UF340	400V	400V
UF350	500V	500V

- Ultra Fast Recovery
- 175°C Junction Temperature
- VRRM 300 to 500 Volts
- 3 Amp Current Rating
- $t_{RR}$  50 ns Max.

## Electrical Characteristics

Average forward current	$I_F(AV)$ 3.0 Amps	$T_A = 101^\circ\text{C}$ , Square wave, $R_{\theta JL} = 18^\circ\text{C/W} = 3/8"$
Maximum surge current	$I_{FSM}$ 100 Amps	8.3ms, half sine, $T_J = 175^\circ\text{C}$
Max peak forward voltage	$V_{FM}$ 1.1 Volts	$I_{FM} = 3.0\text{A}; T_J = 25^\circ\text{C}^*$
Max reverse recovery time	$t_{RR}$ 50 ns	1/2A, 1A, 1/4A, $T_J = 25^\circ\text{C}$
Max peak reverse current	$I_{RM}$ 10 $\mu\text{A}$	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance	$C_J$ 16 pF	$V_R = 10\text{V}, T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temperature range	$T_{STG}$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Operating junction temp range	$T_J$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Maximum thermal resistance	$L = 3/8"$ $R_{\theta JL}$	$18^\circ\text{C/W}$ Junction to Lead
Weight		.011 ounces (0.34 grams) typical



8700 East Thomas Road, P.O. Box 1390  
Scottsdale, AZ 85252  
PH: (480) 941-6300  
FAX: (480) 947-1503  
www.microsemi.com

05-07-07 Rev. 3

# UF330 — UF350

Figure 1  
Typical Forward Characteristics

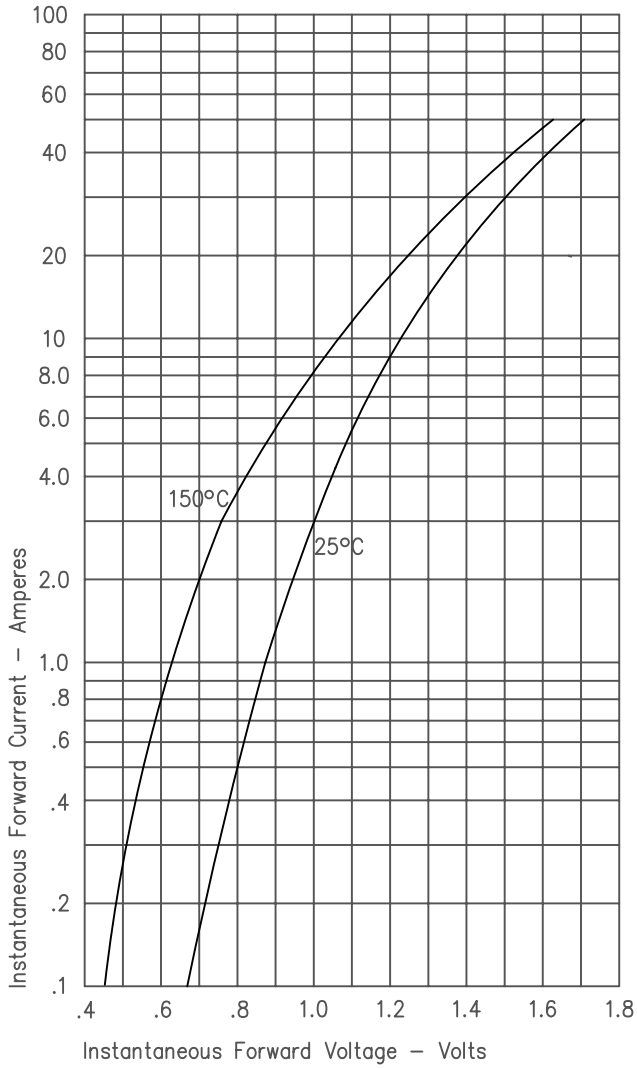


Figure 3  
Typical Junction Capacitance

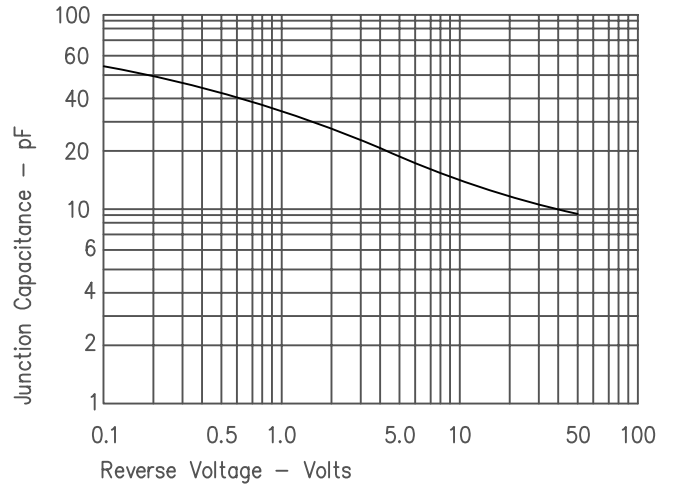


Figure 2  
Typical Reverse Characteristics

