


UES5 Series Surge Protector

UES5 series surge protector, which conforms to standards IEC61643-1,GB18802.1, and is applicable to various power supply systems of AC 50Hz/60Hz and rated voltage 380V. The product has a lapping-divorcement device and a reliable operating status indication, and the function of remote communicated contact is available to achieve long-distance control; the response time is less than 25 nanoseconds, and the product adopts 35mm electrical rail with safe use and easy installation.

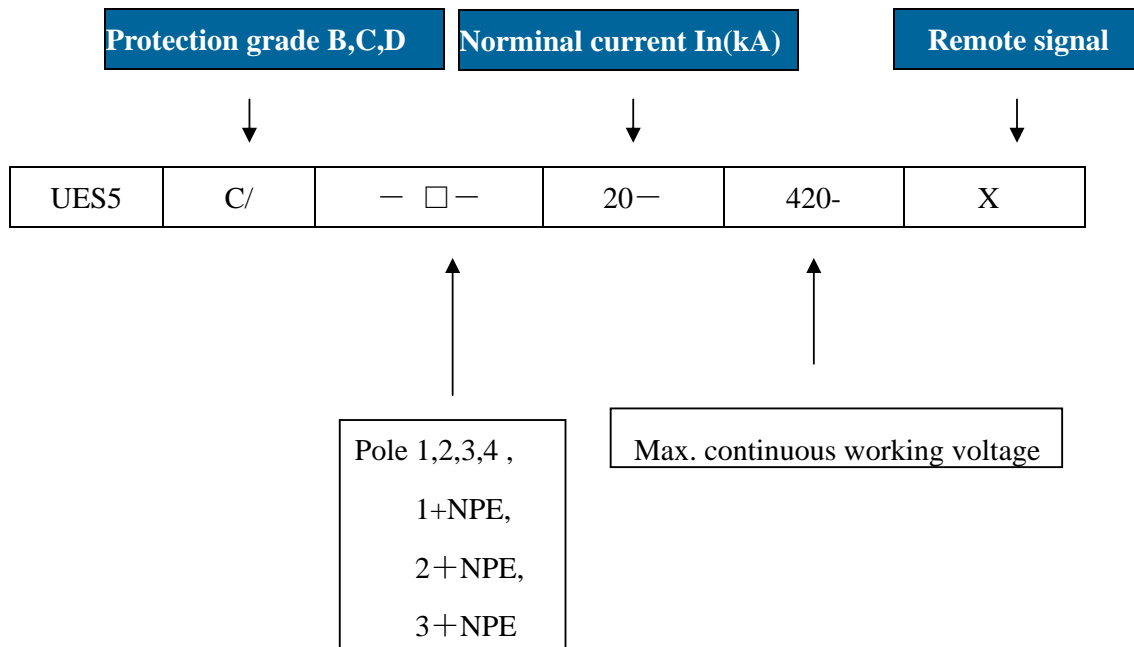

Type	Conforming standard	Rated working Voltage Un	Rated discharge current In(8/20us)	Max. discharge current In(8/20us)	Responding time t (ns)	Protecting grade accordance with IEC529
UES5D/□-10-140 UES5D/□-10-275 UES5D/□-10-320 UES5D/□-10-385 UES5D/□-10-420	IEC61643-1 GB18802.1	140	5kA	10kA	Below 25	IP20
UES5D/□-20-275 UES5D/□-20-320 UES5D/□-20-385 UES5D/□-20-420		275 320 85 420				
UES5C/□-40-275 UES5C/□-40-320 UES5D/□-40-385 UES5D□-40-420		275 320 385 420	20kA	40kA		
UES5C/□-60-275 UES5C/□-60-320 UES5C/□-60-385 UES5C/□-60-420		275 320 385 420				
UES5B/□-80-275 UES5B/□-80-320 UES5B/□-80-385 UES5B/□-80-420		275 320 385 420	40kA	80kA		
UES5B/□-100-320 UES5B/□-100-385 UES5B/□-100-420		320 385 420				
UES5B/□-140-320 UES5B/□-140-385 UES5B/□-140-420		320 385 420	70kA	140kA		