



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BC847BV

Features

- Epitaxial Die Construction
- Complementary PNP Type Available (BC857BV)
- Ultra-small Surface Mount Package
- Lead Free Plating
- Marking:K4V
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

NPN Plastic-Encapsulate Transistors


Maximum Ratings @ 25°C Unless Otherwise Specified

Symbol	Rating	Rating	Unit
V_{CE0}	Collector-Emitter Voltage	45	V
V_{CBO}	Collector-Base Voltage	50	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	0.1	A
P_C	Collector Dissipation	0.15	W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	833	°C/W
T_J	Operating Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=10\text{mAdc}$, $I_B=0$)	45	---	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\text{uAdc}$, $I_E=0$)	50	---	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=1\text{uAdc}$, $I_C=0$)	6	---	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=30\text{Vdc}$, $I_E=0\text{Vdc}$)	---	---	15	nAdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=5\text{Vdc}$, $I_C=0\text{Vdc}$)	---	---	100	nAdc
h_{FE}	DC Current Gain ($I_C=2\text{mAdc}$, $V_{CE}=5\text{Vdc}$)	200	---	450	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10\text{mAdc}$, $I_B=0.5\text{mAdc}$) ($I_C=100\text{mAdc}$, $I_B=5\text{mAdc}$)	---	---	100 300	mVdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10\text{mAdc}$, $I_B=0.5\text{mAdc}$) ($I_C=100\text{mAdc}$, $I_B=5\text{mAdc}$)	---	700 900	---	mVdc
V_{BE}	Base-Emitter Voltage ($I_C=2\text{mAdc}$, $V_{CE}=5\text{Vdc}$) ($I_C=10\text{mAdc}$, $V_{CE}=5\text{Vdc}$)	580	660	700 770	mVdc
f_T	Transition Frequency ($V_{CE}=5\text{Vdc}$, $I_C=10\text{mAdc}$, $f=100\text{MHz}$)	100	---	---	MHz
C_{ob}	Output Capacitance ($V_{CB}=10\text{Vdc}$, $f=1.0\text{MHz}$, $I_E=0$)	---	---	4.5	pF
NF	Noise Figure ($V_{CE}=5\text{V}$, $BW=200\text{Hz}$, $f=1\text{KHz}$, $R_S=2\text{k}\Omega$)	---	---	10	dB

SOT-563

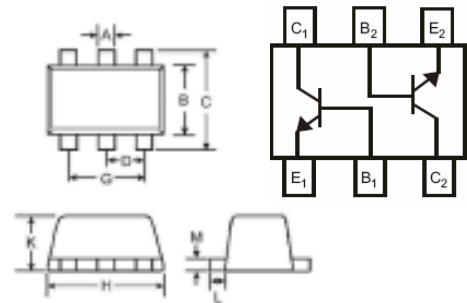

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.006	.011	0.15	0.30	
B	.043	.049	1.10	1.25	
C	.061	.067	1.55	1.70	
D	.020		0.50		
G	.035	.043	0.90	1.10	
H	.059	.067	1.50	1.70	
K	.022	.023	0.56	0.60	
L	.004	.011	0.10	0.30	
M	.004	.007	0.10	0.18	

BC847BV

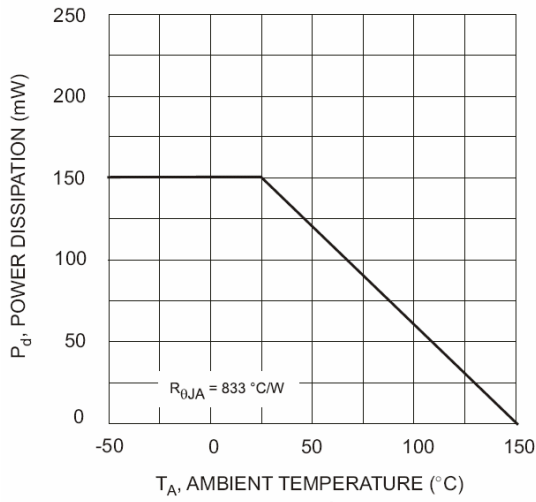


Fig. 1, Derating Curve - Total

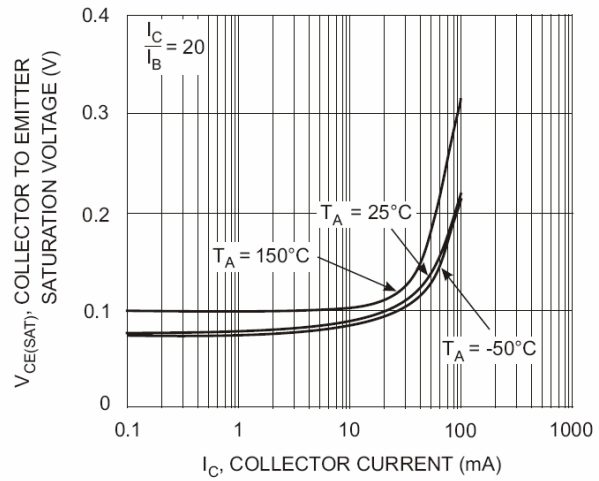


Fig. 2, Collector Emitter Saturation Voltage vs. Collector Current

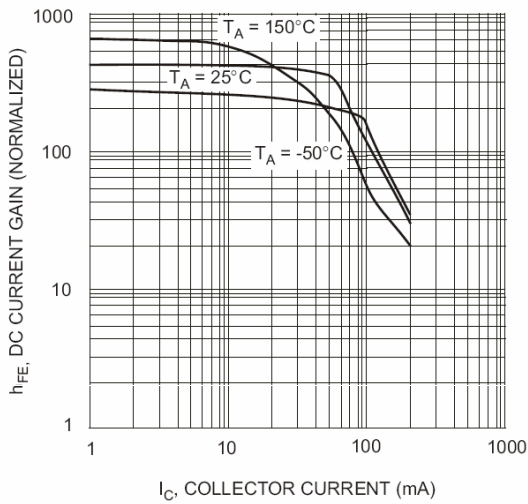


Fig. 3, DC Current Gain vs. Collector Current

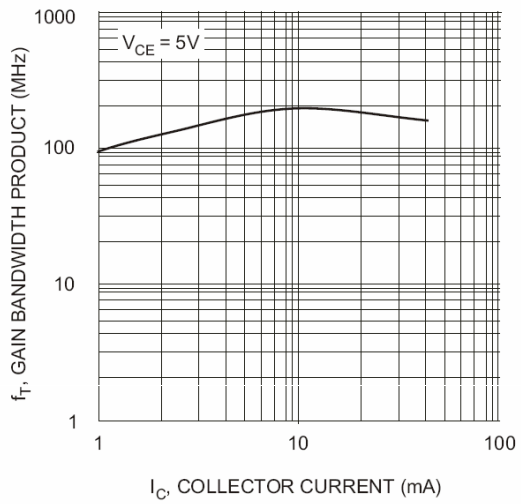


Fig. 4, Gain Bandwidth Product vs. Collector Current



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.