



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

2SB1260
2SB1260-P
2SB1260-Q
2SB1260-R

Features


- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Power dissipation: $P_{CM} = 0.5W(T_{amb}=25^{\circ}C)$
- Collector current: $I_{CM} = -1A$
- Collector-base voltage: $V_{(BR)CBO} = -80V$
- Operating and storage junction temperature range
 $T_J, T_{stg}: -55^{\circ}C$ to $+150^{\circ}C$

PNP
Plastic-Encapsulate
Transistors

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Unit
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C = -1mA, I_E = 0$)	-80	---	---	V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C = -50 \mu A, I_E = 0$)	-80	---	---	V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E = -50 \mu A, I_C = 0$)	-5.0	---	---	V
I_{CBO}	Collector cut-off Current ($V_{CB} = -60V, I_E = 0$)	---	---	-1.0	μA
I_{EBO}	Emitter cut-off Current ($V_{EB} = -4V, I_C = 0$)	---	---	-1.0	μA
h_{FE}	DC current gain ($V_{CE} = -3V, I_C = -0.1A$)	82	---	390	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -0.5A, I_E = -0.05A$)	---	---	-0.4	V
f_T	Transition Frequency ($V_{CE} = -5.0Vdc, I_C = -0.05Adc, F = 30MHz$)	---	80	---	MHZ

SOT-89

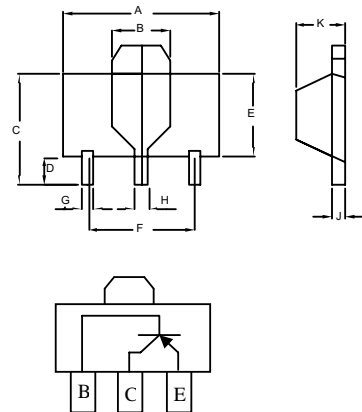

CLASSIFICATION OF h_{FE}

Rank	P	Q	R
Range	82-180	120-270	180-390
Marking	ZL		

DIM	DIMENSINS				NOTES
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.173	.181	4.39	4.60	
B	.063	.071	1.60	1.80	
C	.154	.165	3.91	4.19	
D	.031	.039	0.80	1.00	
E	.092	.100	2.34	2.54	
F	.118	----	3.00	----	TYP
G	.013	.019	0.33	0.48	
H	.015	.021	0.38	0.53	
J	.015	.016	0.38	0.41	
K	.055	.063	1.40	1.60	

www.mccsemi.com



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;1Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com