

Ød ±0.05	p = 10	p > 10	p = 37.5
	0.6	0.8	1.0

All dimensions are in mm.

PRODUCT CODE SYSTEM

The part number, comprising 14 digits, is formed as follows:

1	2	3	4	5	6	7	8	9	10	11	12	13	14
R	6	0										-	

- Digit 1 to 3 Series code.
- Digit 4 d.c. rated voltage:
C =50V D =63V E =100V G =160V
I =250V M =400V P =630V Q =1000V
- Digit 5 Pitch:
F=10mm; I=15mm; N=22.5mm; R=27.5mm;
W=37.5mm
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and/or packaging (table 1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use
- Digit 14 Capacitance tolerance:
J=5%; K=10%; M=20%.

Table 1 (for more detailed information, please refer to page 14)

Standard packaging style	Lead length (mm)	Taping style			Ordering code (Digit 10 to 11)
		P ₂ (mm)	Fig. (No.)	Pitch (mm)	
AMMO-PACK		12.70	1	10.0/15.0	DQ
AMMO-PACK		19.05	2	22.5	DQ
REEL Ø 355mm		12.70	1	10.0/15.0	GY
REEL Ø 500mm		12.70	1	10.0/15.0	CK
REEL Ø 500mm		19.05	2	22.5/27.5	CK
Loose, short leads	4 ⁺²				AA
Loose, long leads (p<10mm)	17 ^{+1/-2}				Z3
Loose, long leads (p≥15mm)	30 ⁺⁵				40
	25 ^{+2/-1}				50

Note: Ammo-pack is the preferred packaging for taped version.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

Typical applications: blocking, coupling, decoupling, by-passing, interference suppression in low voltage applications (i.e.: AUTOMOTIVE).

PRODUCT CODE: **R60**

Note: Special version, in compliance with DIN 44122 is available upon request.

Construction:

- **STACKED technology for pitch 10mm**
(Rated Voltage from 50 to 630Vdc)
- **WOUND technology from pitch 10 to 27.5mm**
(Rated Voltage from 63 to 1000Vdc)


Pitch (mm)	Box thickness (B) (mm)	Maximum dimensions (mm)		
		B max	H max	L max
10.0	All	B +0.2	H +0.1	L +0.2
15.0	<7.5	B +0.2	H +0.1	L +0.3
15.0	≥7.5	B +0.2	H +0.1	L +0.5
22.5	All	B +0.2	H +0.1	L +0.3
27.5	All	B +0.2	H +0.1	L +0.3
37.5	All	B +0.3	H +0.1	L +0.3

GENERAL TECHNICAL DATA

- Dielectric:** polyester film (polyethylene terephthalate).
- Plates:** aluminium layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** plastic case, thermosetting resin filled.
Box material is solvent resistant and flame retardant according to UL94.
- Marking:** Manufacturer's logo (if requested), capacitance, tolerance, D.C. rated voltage.
- Climatic category:** 55/105/56 IEC 60068-1
- Operating temperature range:** -55 to +105°C
Upper operating temperature of +125°C is allowed for a max.operating time of 1000h.

Related documents: IEC 60384-2

Winding scheme

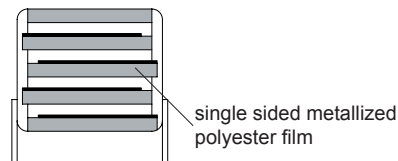

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

STACKED VERSION

Rated Cap.	50Vdc/30Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
1.5 μF	4.0	9.0	13.0	10.0	30	3 E3	R60CF4150--6--
2.2 μF	4.0	9.0	13.0	10.0	30	3 E3	R60CF4220--6--
3.3 μF	5.0	11.0	13.0	10.0	30	3 E3	R60CF4330--6--
4.7 μF	6.0	12.0	13.0	10.0	30	3 E3	R60CF4470--6--
5.6 μF	6.0	12.0	13.0	10.0	30	3 E3	R60CF4560--6--

Rated Cap.	250Vdc/160Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.10 μF	4.0	9.0	13.0	10.0	150	75 E3	R60IF 3100--6--
0.15 μF	4.0	9.0	13.0	10.0	150	75 E3	R60IF 3150--6--
0.22 μF	5.0	11.0	13.0	10.0	150	75 E3	R60IF 3220--6--
0.33 μF	5.0	11.0	13.0	10.0	150	75 E3	R60IF 3330--6--
0.47 μF	6.0	12.0	13.0	10.0	150	75 E3	R60IF 3470--6--

Rated Cap.	63Vdc/40Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
1.0 μF	4.0	9.0	13.0	10.0	50	6.3 E3	R60DF4100--6--
1.5 μF	5.0	11.0	13.0	10.0	50	6.3 E3	R60DF4150--6--
2.2 μF	5.0	11.0	13.0	10.0	50	6.3 E3	R60DF4220--6--
3.3 μF	6.0	12.0	13.0	10.0	50	6.3 E3	R60DF4330--6--

Rated Cap.	400Vdc/200Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.033 μF	4.0	9.0	13.0	10.0	175	140 E3	R60MF2330--6--
0.047 μF	4.0	9.0	13.0	10.0	175	140 E3	R60MF2470--6--
0.068 μF	4.0	9.0	13.0	10.0	175	140 E3	R60MF2680--6--
0.10 μF	5.0	11.0	13.0	10.0	175	140 E3	R60MF3100--6--
0.15 μF	6.0	12.0	13.0	10.0	175	140 E3	R60MF3150--6--

Rated Cap.	100Vdc/63Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.33 μF	4.0	9.0	13.0	10.0	75	15 E3	R60EF 3330--6--
0.47 μF	4.0	9.0	13.0	10.0	75	15 E3	R60EF 3470--6--
0.68 μF	4.0	9.0	13.0	10.0	75	15 E3	R60EF 3680--6--
1.0 μF	5.0	11.0	13.0	10.0	75	15 E3	R60EF 4100--6--
1.5 μF	5.0	11.0	13.0	10.0	75	15 E3	R60EF 4150--6--

Rated Cap.	630Vdc/220Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.010 μF	4.0	9.0	13.0	10.0	200	250 E3	R60PF 2100--6--
0.015 μF	4.0	9.0	13.0	10.0	200	250 E3	R60PF 2150--6--
0.022 μF	4.0	9.0	13.0	10.0	200	250 E3	R60PF 2220--6--
0.033 μF	5.0	11.0	13.0	10.0	200	250 E3	R60PF 2330--6--
0.047 μF	5.0	11.0	13.0	10.0	200	250 E3	R60PF 2470--6--

Rated Cap.	160Vdc/90Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.22 μF	4.0	9.0	13.0	10.0	100	32 E3	R60GF 3220--6--
0.33 μF	4.0	9.0	13.0	10.0	100	32 E3	R60GF 3330--6--
0.47 μF	5.0	11.0	13.0	10.0	100	32 E3	R60GF 3470--6--
0.68 μF	6.0	12.0	13.0	10.0	100	32 E3	R60GF 3680--6--

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (±5%); K (±10%); M (±20%) _____

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (±5%); K (±10%); M (±20%) _____

All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.

The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

*Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

WOUND VERSION

Rated Cap.	63Vdc/40Vac Std dimensions				Max dv/dt (V/ μ s)	Max K ₀ (V ² / μ s)	Part Number
	B	H	L	p			
0.68 μ F	5.0	11.0	18.0	15.0	2.5	0.32 E3	R60DI 3680--3--
1.0 μ F	5.0	11.0	18.0	15.0	2.5	0.32 E3	R60DI 4100--3--
1.5 μ F	5.0	11.0	18.0	15.0	2.5	0.32 E3	R60DI 4150--3--
2.2 μ F	6.0	12.0	18.0	15.0	2.5	0.32 E3	R60DI 4220--3--
3.3 μ F	7.5	13.5	18.0	15.0	2.5	0.32 E3	R60DI 4330--3--
3.3 μ F	9.0	12.5	18.0	15.0	2.5	0.32 E3	R60DI 4330--L--
4.7 μ F	8.5	14.5	18.0	15.0	2.5	0.32 E3	R60DI 4470--3--
4.7 μ F	13.0	12.0	18.0	15.0	2.5	0.32 E3	R60DI 4470--L--
6.8 μ F	10.0	16.0	18.0	15.0	2.5	0.32 E3	R60DI 4680--3--
3.3 μ F	6.0	15.0	26.5	22.5	1.5	0.19 E3	R60DN4330--3--
4.7 μ F	7.0	16.0	26.5	22.5	1.5	0.19 E3	R60DN4470--3--
6.8 μ F	7.0	16.0	26.5	22.5	1.5	0.19 E3	R60DN4680--3--
10.0 μ F	8.5	17.0	26.5	22.5	1.5	0.19 E3	R60DN5100--3--
15.0 μ F	11.0	20.0	26.5	22.5	1.5	0.19 E3	R60DN5150--3--
10.0 μ F	9.0	17.0	32.0	27.5	1.0	0.13 E3	R60DR5100--3--
15.0 μ F	9.0	17.0	32.0	27.5	1.0	0.13 E3	R60DR5150--4--
22.0 μ F	11.0	20.0	32.0	27.5	1.0	0.13 E3	R60DR5220--4--
33.0 μ F	13.0	22.0	32.0	27.5	1.0	0.13 E3	R60DR5330--4--
47.0 μ F	14.0	28.0	32.0	27.5	1.0	0.13 E3	R60DR5470--4--
68.0 μ F	18.0	33.0	32.0	27.5	1.0	0.13 E3	R60DR5680--4--
100.0 μ F	22.0	37.0	32.0	27.5	1.0	0.13 E3	R60DR6100--0--
22.0 μ F	11.0	22.0	41.5	37.5	0.8	0.10 E3	R60DW5220--3--
33.0 μ F	11.0	22.0	41.5	37.5	0.8	0.10 E3	R60DW5330--4--
47.0 μ F	13.0	24.0	41.5	37.5	0.8	0.10 E3	R60DW5470--4--
68.0 μ F	19.0	32.0	41.5	37.5	0.8	0.10 E3	R60DW5680--3--
100.0 μ F	19.0	32.0	41.5	37.5	0.8	0.10 E3	R60DW6100--4--
150.0 μ F	20.0	40.0	41.5	37.5	0.8	0.10 E3	R60DW6150--0--
220.0 μ F	24.0	44.0	41.5	37.5	0.8	0.10 E3	R60DW6220--0--

Rated Cap.	160Vdc/90Vac Std dimensions				Max dv/dt (V/ μ s)	Max K ₀ (V ² / μ s)	Part Number
	B	H	L	p			
0.33 μ F	5.0	11.0	18.0	15.0	9.0	2.90 E3	R60GI 3330--3--
0.47 μ F	5.0	11.0	18.0	15.0	9.0	2.90 E3	R60GI 3470--3--
0.68 μ F	5.0	11.0	18.0	15.0	9.0	2.90 E3	R60GI 3680--3--
1.0 μ F	7.5	13.5	18.0	15.0	9.0	2.90 E3	R60GI 4100--3--
1.5 μ F	8.5	14.5	18.0	15.0	9.0	2.90 E3	R60GI 4150--3--
1.5 μ F	9.0	12.5	18.0	15.0	9.0	2.90 E3	R60GI 4150--L--
2.2 μ F	10.0	16.0	18.0	15.0	9.0	2.90 E3	R60GI 4220--3--
2.2 μ F	13.0	12.0	18.0	15.0	9.0	2.90 E3	R60GI 4220--L--
3.3 μ F	11.0	19.0	18.0	15.0	9.0	2.90 E3	R60GI 4330--3--
1.5 μ F	6.0	15.0	26.5	22.5	5.5	1.70 E3	R60GN4150--3--
2.2 μ F	7.0	16.0	26.5	22.5	5.5	1.70 E3	R60GN4220--3--
3.3 μ F	8.5	17.0	26.5	22.5	5.5	1.70 E3	R60GN4330--3--
4.7 μ F	11.0	20.0	26.5	22.5	5.5	1.70 E3	R60GN4470--3--
6.8 μ F	13.0	22.0	26.5	22.5	5.5	1.70 E3	R60GN4680--3--
3.3 μ F	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR4330--3--
4.7 μ F	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR4470--3--
6.8 μ F	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR4680--4--
10.0 μ F	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR5100--4--
15.0 μ F	11.0	20.0	32.0	27.5	3.0	0.96 E3	R60GR5150--4--
22.0 μ F	13.0	22.0	32.0	27.5	3.0	0.96 E3	R60GR5220--4--
33.0 μ F	14.0	28.0	32.0	27.5	3.0	0.96 E3	R60GR5330--0--
47.0 μ F	18.0	33.0	32.0	27.5	3.0	0.96 E3	R60GR5470--0--
68.0 μ F	22.0	37.0	32.0	27.5	3.0	0.96 E3	R60GR5680--0--
10.0 μ F	11.0	22.0	41.5	37.5	2.0	0.64 E3	R60GW5100--3--
15.0 μ F	11.0	22.0	41.5	37.5	2.0	0.64 E3	R60GW5150--4--
22.0 μ F	11.0	22.0	41.5	37.5	2.0	0.64 E3	R60GW5220--4--
33.0 μ F	13.0	24.0	41.5	37.5	2.0	0.64 E3	R60GW5330--4--
47.0 μ F	16.0	28.5	41.5	37.5	2.0	0.64 E3	R60GW5470--4--
68.0 μ F	19.0	32.0	41.5	37.5	2.0	0.64 E3	R60GW5680--0--
100.0 μ F	20.0	40.0	41.5	37.5	2.0	0.64 E3	R60GW6100--0--
150.0 μ F	30.0	45.0	41.5	37.5	2.0	0.64 E3	R60GW6150--0--

Rated Cap.	100Vdc/63Vac Std dimensions				Max dv/dt (V/ μ s)	Max K ₀ (V ² / μ s)	Part Number
	B	H	L	p			
0.33 μ F	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 3330--3--
0.47 μ F	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 3470--3--
0.68 μ F	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 3680--3--
1.0 μ F	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 4100--3--
1.5 μ F	7.5	13.5	18.0	15.0	3.0	0.6 E3	R60EI 4150--3--
2.2 μ F	8.5	14.5	18.0	15.0	3.0	0.6 E3	R60EI 4220--3--
2.2 μ F	9.0	12.5	18.0	15.0	3.0	0.6 E3	R60EI 4220--L--
3.3 μ F	10.0	16.0	18.0	15.0	3.0	0.6 E3	R60EI 4330--3--
3.3 μ F	13.0	12.0	18.0	15.0	3.0	0.6 E3	R60EI 4330--L--
4.7 μ F	11.0	19.0	18.0	15.0	3.0	0.6 E3	R60EI 4470--3--
1.5 μ F	6.0	15.0	26.5	22.5	2.0	0.4 E3	R60EN4150--3--
2.2 μ F	6.0	15.0	26.5	22.5	2.0	0.4 E3	R60EN4220--3--
3.3 μ F	7.0	16.0	26.5	22.5	2.0	0.4 E3	R60EN4330--3--
4.7 μ F	8.5	17.0	26.5	22.5	2.0	0.4 E3	R60EN4470--3--
6.8 μ F	10.0	18.5	26.5	22.5	2.0	0.4 E3	R60EN4680--3--
10.0 μ F	13.0	22.0	26.5	22.5	2.0	0.4 E3	R60EN5100--3--
4.7 μ F	9.0	17.0	32.0	27.5	1.5	0.3 E3	R60ER4470--3--
6.8 μ F	9.0	17.0	32.0	27.5	1.5	0.3 E3	R60ER4680--3--
10.0 μ F	9.0	17.0	32.0	27.5	1.5	0.3 E3	R60ER5100--4--
15.0 μ F	11.0	20.0	32.0	27.5	1.5	0.3 E3	R60ER5150--4--
22.0 μ F	13.0	22.0	32.0	27.5	1.5	0.3 E3	R60ER5220--4--
33.0 μ F	14.0	28.0	32.0	27.5	1.5	0.3 E3	R60ER5330--4--
47.0 μ F	18.0	33.0	32.0	27.5	1.5	0.3 E3	R60ER5470--4--
68.0 μ F	22.0	37.0	32.0	27.5	1.5	0.3 E3	R60ER5680--0--
15.0 μ F	11.0	22.0	41.5	37.5	1.0	0.2 E3	R60EW5150--4--
22.0 μ F	11.0	22.0	41.5	37.5	1.0	0.2 E3	R60EW5220--4--
33.0 μ F	13.0	24.0	41.5	37.5	1.0	0.2 E3	R60EW5330--4--
47.0 μ F	16.0	28.5	41.5	37.5	1.0	0.2 E3	R60EW5470--4--
68.0 μ F	19.0	32.0	41.5	37.5	1.0	0.2 E3	R60EW5680--5--
100.0 μ F	20.0	40.0	41.5	37.5	1.0	0.2 E3	R60EW6100--0--
150.0 μ F	24.0	44.0	41.5	37.5	1.0	0.2 E3	R60EW6150--0--

Rated Cap.	250Vdc/160Vac Std dimensions				Max dv/dt (V/ μ s)	Max K ₀ (V ² / μ s)	Part Number
	B	H	L	p			
0.10 μ F	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3100--3--
0.15 μ F	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3150--3--
0.22 μ F	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3220--3--
0.33 μ F	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3330--3--
0.47 μ F	6.0	12.0	18.0	15.0	12	6.0 E3	R60II 3470--3--
0.68 μ F	7.5	13.5	18.0	15.0	12	6.0 E3	R60II 3680--3--
0.68 μ F	9.0	12.5	18.0	15.0	12	6.0 E3	R60II 3680--L--
1.0 μ F	8.5	14.5	18.0	15.0	12	6.0 E3	R60II 4100--3--
1.0 μ F	13.0	12.0	18.0	15.0	12	6.0 E3	R60II 4100--L--
1.5 μ F	10.0	16.0	18.0	15.0	12	6.0 E3	R60II 4150--3--
0.47 μ F	6.0	15.0	26.5	22.5	8	4.0 E3	R60IN 3470--3--
0.68 μ F	6.0	15.0	26.5	22.5	8	4.0 E3	R60IN 3680--3--
1.0 μ F	6.0	15.0	26.5	22.5	8	4.0 E3	R60IN 4100--3--
1.5 μ F	7.0	16.0	26.5	22.5	8	4.0 E3	R60IN 4150--3--
2.2 μ F	10.0	18.5	26.5	22.5	8	4.0 E3	R60IN 4220--3--
3.3 μ F	11.0	20.0	26.5	22.5	8	4.0 E3	R60IN 4330--3--
1.5 μ F	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4150--3--
2.2 μ F	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4220--3--
3.3 μ F	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4330--4--
4.7 μ F	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4470--4--
6.8 μ F	11.0	20.0	32.0	27.5	5	2.5 E3	R60IR 4680--4--
10.0 μ F	13.0	22.0	32.0	27.5	5	2.5 E3	R60IR 5100--4--
15.0 μ F	14.0	28.0	32.0	27.5	5	2.5 E3	R60IR 5150--4--
22.0 μ F	18.0	33.0	32.0	27.5	5	2.5 E3	R60IR 5220--0--
33.0 μ F	22.0	37.0	32.0	27.5	5	2.5 E3	R60IR 5330--0--
4.7 μ F	11.0	22.0	41.5	37.5	4	2.0 E3	R60IW 4470--3--
6.8 μ F	11.0	22.0	41.5	37.5	4	2.0 E3	R60IW 4680--4--
10.0 μ F	11.0	22.0	41.5	37.5	4	2.0 E3	R60IW 5100--4--
15.0 μ F	13.0	24.0	41.5	37.5	4	2.0 E3	R60IW 5150--4--
22.0 μ F	16.0	28.5	41.5	37.5	4	2.0 E3	R60IW 5220--4--
33.0 μ F	19.0	32.0	41.5	37.5	4	2.0 E3	R60IW 5330--4--
47.0 μ F	20.0	40.0	41.5	37.5	4	2.0 E3	R60IW 5470--0--
68.0 μ F	24.0	44.0	41.5	37.5	4	2.0 E3	R60IW 5680--0--

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (\pm 5%); K (\pm 10%); M (\pm 20%) _____

All dimensions are in mm.

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (\pm 5%); K (\pm 10%); M (\pm 20%) _____

Note: If the working voltage (V) is lower than the rated voltage (V_R), the

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

WOUND VERSION

Rated Cap.	400Vdc/200Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number	Rated Cap.	630Vdc/220*Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p					B	H	L	p			
0.015 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2150--3--	4700 pF	4.0	9.0	13.0	10.0	40	50 E3	R60PF 1470--3--
0.022 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2220--3--	6800 pF	4.0	9.0	13.0	10.0	40	50 E3	R60PF 1680--3--
0.033 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2330--3--	0.010 μF	4.0	9.0	13.0	10.0	40	50 E3	R60PF 2100--3--
0.047 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2470--3--	0.015 μF	4.0	9.0	13.0	10.0	40	50 E3	R60PF 2150--3--
0.068 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2680--4--	0.022 μF	4.0	9.0	13.0	10.0	40	50 E3	R60PF 2220--4--
0.068 μF	5.0	11.0	13.0	10.0	30.0	24.0 E3	R60MF2680--3--	0.022 μF	5.0	11.0	13.0	10.0	40	50 E3	R60PF 2220--3--
0.10 μF	5.0	11.0	13.0	10.0	30.0	24.0 E3	R60MF3100--4--	0.033 μF	5.0	11.0	13.0	10.0	40	50 E3	R60PF 2330--4--
0.10 μF	6.0	12.0	13.0	10.0	30.0	24.0 E3	R60MF3100--3--	0.033 μF	6.0	12.0	13.0	10.0	40	50 E3	R60PF 2330--3--
0.15 μF	6.0	12.0	13.0	10.0	30.0	24.0 E3	R60MF3150--3--	0.047 μF	6.0	12.0	13.0	10.0	40	50 E3	R60PF 2470--3--
0.022 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI 2220--3--	0.033 μF	5.0	11.0	18.0	15.0	25	31 E3	R60PI 2330--3--
0.047 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI 2470--3--	0.047 μF	5.0	11.0	18.0	15.0	25	31 E3	R60PI 2470--3--
0.068 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI 2680--3--	0.068 μF	5.0	11.0	18.0	15.0	25	31 E3	R60PI 2680--4--
0.10 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI 3100--3--	0.068 μF	6.0	12.0	18.0	15.0	25	31 E3	R60PI 2680--3--
0.15 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI 3150--3--	0.10 μF	6.0	12.0	18.0	15.0	25	31 E3	R60PI 3100--4--
0.22 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI 3220--4--	0.10 μF	7.5	13.5	18.0	15.0	25	31 E3	R60PI 3100--3--
0.22 μF	6.0	12.0	18.0	15.0	20.0	16.0 E3	R60MI 3220--3--	0.10 μF	9.0	12.5	18.0	15.0	25	31 E3	R60PI 3100--L--
0.33 μF	7.5	13.5	18.0	15.0	20.0	16.0 E3	R60MI 3330--3--	0.15 μF	7.5	13.5	18.0	15.0	25	31 E3	R60PI 3150--4--
0.33 μF	9.0	12.5	18.0	15.0	20.0	16.0 E3	R60MI 3330--L--	0.15 μF	8.5	14.5	18.0	15.0	25	31 E3	R60PI 3150--3--
0.47 μF	7.5	13.5	18.0	15.0	20.0	16.0 E3	R60MI 3470--4--	0.22 μF	8.5	14.5	18.0	15.0	25	31 E3	R60PI 3220--4--
0.47 μF	8.5	14.5	18.0	15.0	20.0	16.0 E3	R60MI 3470--3--	0.22 μF	10.0	16.0	18.0	15.0	25	31 E3	R60PI 3220--3--
0.47 μF	9.0	12.5	18.0	15.0	20.0	16.0 E3	R60MI 3470--L1-	0.33 μF	10.0	16.0	18.0	15.0	25	31 E3	R60PI 3330--3--
0.47 μF	13.0	12.0	18.0	15.0	20.0	16.0 E3	R60MI 3470--L--	0.10 μF	6.0	15.0	26.5	22.5	12	15 E3	R60PN3100--3--
0.68 μF	10.0	16.0	18.0	15.0	20.0	16.0 E3	R60MI 3680--4--	0.15 μF	6.0	15.0	26.5	22.5	12	15 E3	R60PN3150--3--
0.68 μF	11.0	19.0	18.0	15.0	20.0	16.0 E3	R60MI 3680--3--	0.22 μF	6.0	15.0	26.5	22.5	12	15 E3	R60PN3220--4--
0.68 μF	13.0	12.0	18.0	15.0	20.0	16.0 E3	R60MI 3680--L--	0.22 μF	7.0	16.0	26.5	22.5	12	15 E3	R60PN3220--3--
1.0 μF	11.0	19.0	18.0	15.0	20.0	16.0 E3	R60MI 4100--3--	0.33 μF	7.0	16.0	26.5	22.5	12	15 E3	R60PN3330--5--
0.22 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3220--3--	0.33 μF	8.5	17.0	26.5	22.5	12	15 E3	R60PN3330--4--
0.33 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3330--3--	0.33 μF	10.0	18.5	26.5	22.5	12	15 E3	R60PN3330--3--
0.47 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3470--3--	0.47 μF	10.0	18.5	26.5	22.5	12	15 E3	R60PN3470--4--
0.68 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3680--4--	0.47 μF	11.0	20.0	26.5	22.5	12	15 E3	R60PN3470--3--
0.68 μF	7.0	16.0	26.5	22.5	10.0	8.0 E3	R60MN3680--3--	0.68 μF	11.0	20.0	26.5	22.5	12	15 E3	R60PN3680--4--
1.0 μF	8.5	17.0	26.5	22.5	10.0	8.0 E3	R60MN4100--4--	0.68 μF	13.0	22.0	26.5	22.5	12	15 E3	R60PN3680--3--
1.0 μF	10.0	18.5	26.5	22.5	10.0	8.0 E3	R60MN4100--3--	0.33 μF	9.0	17.0	32.0	27.5	10	12 E3	R60PR3330--3--
1.5 μF	10.0	18.5	26.5	22.5	10.0	8.0 E3	R60MN4150--4--	0.47 μF	9.0	17.0	32.0	27.5	10	12 E3	R60PR3470--4--
1.5 μF	11.0	20.0	26.5	22.5	10.0	8.0 E3	R60MN4150--3--	0.68 μF	11.0	20.0	32.0	27.5	10	12 E3	R60PR3680--4--
2.2 μF	13.0	22.0	26.5	22.5	10.0	8.0 E3	R60MN4220--3--	1.0 μF	11.0	20.0	32.0	27.5	10	12 E3	R60PR4100--5--
0.68 μF	9.0	17.0	32.0	27.5	8.5	3.4 E3	R60MR3680--3--	1.5 μF	18.0	33.0	32.0	27.5	10	12 E3	R60PR4150--3--
1.0 μF	9.0	17.0	32.0	27.5	8.5	3.4 E3	R60MR4100--3--	2.2 μF	18.0	33.0	32.0	27.5	10	12 E3	R60PR4220--4--
1.5 μF	9.0	17.0	32.0	27.5	8.5	3.4 E3	R60MR4150--4--	3.3 μF	22.0	37.0	32.0	27.5	10	12 E3	R60PR4330--4--
2.2 μF	11.0	20.0	32.0	27.5	8.5	3.4 E3	R60MR4220--4--	4.7 μF	22.0	37.0	32.0	27.5	10	12 E3	R60PR4470--4--
3.3 μF	13.0	22.0	32.0	27.5	8.5	3.4 E3	R60MR4330--4--	1.0 μF	11.0	22.0	41.5	37.5	8	9.6 E3	R60PW4100--3--
4.7 μF	14.0	28.0	32.0	27.5	8.5	3.4 E3	R60MR4470--4--	1.5 μF	11.0	22.0	41.5	37.5	8	9.6 E3	R60PW4150--4--
6.8 μF	18.0	33.0	32.0	27.5	8.5	3.4 E3	R60MR4680--4--	2.2 μF	13.0	24.0	41.5	37.5	8	9.6 E3	R60PW4220--4--
10.0 μF	22.0	37.0	32.0	27.5	8.5	3.4 E3	R60MR5100--4--	3.3 μF	16.0	28.5	41.5	37.5	8	9.6 E3	R60PW4330--4--
3.3 μF	11.0	22.0	41.5	37.5	6.0	2.4 E3	R60MW4330--3--	4.7 μF	19.0	32.0	41.5	37.5	8	9.6 E3	R60PW4470--4--
4.7 μF	11.0	22.0	41.5	37.5	6.0	2.4 E3	R60MW4470--4--	6.8 μF	20.0	40.0	41.5	37.5	8	9.6 E3	R60PW4680--0--
6.8 μF	13.0	24.0	41.5	37.5	6.0	2.4 E3	R60MW4680--4--	10.0 μF	24.0	44.0	41.5	37.5	8	9.6 E3	R60PW5100--4--
10.0 μF	16.0	28.5	41.5	37.5	6.0	2.4 E3	R60MW5100--4--								
15.0 μF	24.0	44.0	41.5	37.5	6.0	2.4 E3	R60MW5150--3--								
22.0 μF	24.0	44.0	41.5	37.5	6.0	2.4 E3	R60MW5220--4--								
33.0 μF	30.0	45.0	41.5	37.5	6.0	2.4 E3	R60MW5330--4--								

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.
The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

* Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: **R60**

WOUND VERSION

Rated Cap.	1000Vdc/250Vac* Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
1000 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1100--0--
1500 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1150--0--
2200 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1220--0--
3300 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1330--0--
4700 pF	5.0	11.0	13.0	10.0	60	120 E3	R60QF 1470--0--
6800 pF	6.0	12.0	13.0	10.0	60	120 E3	R60QF 1680--0--
0.010 μF	5.0	11.0	18.0	15.0	30	60 E3	R60QI 2100--0--
0.015 μF	5.0	11.0	18.0	15.0	30	60 E3	R60QI 2150--3--
0.022 μF	6.0	12.0	18.0	15.0	30	60 E3	R60QI 2220--3--
0.033 μF	7.5	13.5	18.0	15.0	30	60 E3	R60QI 2330--3--
0.033 μF	9.0	12.5	18.0	15.0	30	60 E3	R60QI 2330--L--
0.047 μF	10.0	16.0	18.0	15.0	30	60 E3	R60QI 2470--0--
0.047 μF	13.0	12.0	18.0	15.0	30	60 E3	R60QI 2470--L--
0.068 μF	11.0	19.0	18.0	15.0	30	60 E3	R60QI 2680--0--
0.033 μF	6.0	15.0	26.5	22.5	15	30 E3	R60QN2330--0--
0.047 μF	6.0	15.0	26.5	22.5	15	30 E3	R60QN2470--0--
0.068 μF	7.0	16.0	26.5	22.5	15	30 E3	R60QN2680--3--
0.10 μF	8.5	17.0	26.5	22.5	15	30 E3	R60QN3100--3--
0.15 μF	13.0	22.0	26.5	22.5	15	30 E3	R60QN3150--0--
0.15 μF	9.0	17.0	32.0	27.5	12	24 E3	R60QR3150--3--
0.22 μF	9.0	17.0	32.0	27.5	12	24 E3	R60QR3220--4--
0.33 μF	11.0	20.0	32.0	27.5	12	24 E3	R60QR3330--4--
0.47 μF	13.0	22.0	32.0	27.5	12	24 E3	R60QR3470--4--
0.68 μF	14.0	28.0	32.0	27.5	12	24 E3	R60QR3680--4--
1.00 μF	18.0	33.0	32.0	27.5	12	24 E3	R60QR4100--4--
1.50 μF	22.0	37.0	32.0	27.5	12	24 E3	R60QR4150--4--
0.47 μF	11.0	22.0	41.5	37.5	10	20 E3	R60QW3470--3--
0.68 μF	11.0	22.0	41.5	37.5	10	20 E3	R60QW3680--4--
1.00 μF	13.0	24.0	41.5	37.5	10	20 E3	R60QW4100--4--
1.50 μF	16.0	28.5	41.5	37.5	10	20 E3	R60QW4150--4--
2.20 μF	19.0	32.0	41.5	37.5	10	20 E3	R60QW4220--3--
3.30 μF	24.0	44.0	41.5	37.5	10	20 E3	R60QW4330--0--
4.70 μF	30.0	45.0	41.5	37.5	10	20 E3	R60QW4470--4--

All dimensions are in mm.

Note 1: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V. The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

Note 2: Rated voltages higher than 1000Vdc are available upon request.

* Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 151).

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (±5%); K (±10%); M (±20%) _____

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

ELECTRICAL CHARACTERISTICS**Rated voltage (V_R):** 50Vdc - 63Vdc - 100Vdc - 160Vdc
- 250Vdc - 400Vdc - 630Vdc - 1000Vdc .**Rated temperature (T_R):** +85°C**Temperature derated voltage:**for temperatures between +85°C and +125°C
a decreasing factor of 1.25% per degree °C on the rated
voltage V_R (d.c. and a.c.) has to be applied.**Capacitance range:** 1000pF to 220 μ F**Capacitance values:**

E6 series (IEC 60063 Norm).

Capacitance tolerances (measured at 1 kHz):
 $\pm 5\%$ (J); $\pm 10\%$ (K); $\pm 20\%$ (M).**Total self-inductance (L):** (lead length ~2mm)

Pitch (mm)	10	15	22.5	27.5	37.5
L(nH) \approx	9	10	18	18	22

Dissipation factor (DF): $\text{tg}\delta$ 10^{-4} at +25°C $\pm 5^\circ\text{C}$

kHz	C $\leq 1\mu\text{F}$	C $> 1\mu\text{F}$
1	≤ 100	≤ 100
10	≤ 150	

Insulation resistance:**Test conditions**

Temperature: +25°C $\pm 5^\circ\text{C}$
 Voltage charge time: 1 min
 Voltage charge: 50 Vdc for $V_R < 100$ Vdc
 100 Vdc for $V_R \geq 100$ Vdc

Performance

For $V_R \leq 100$ Vdc
 ≥ 3750 M Ω for C $\leq 0.33\mu\text{F}$ (50000 M Ω)*
 ≥ 1250 s for C $> 0.33\mu\text{F}$ (5000 s)*

For $V_R > 100$ Vdc
 ≥ 30000 M Ω for C $\leq 0.33\mu\text{F}$ (50000 M Ω)*
 ≥ 10000 s for C $> 0.33\mu\text{F}$ (17000 s)*

*Typical value

Test voltage between terminations:1.6x V_R applied for 2 s at +25°C $\pm 5^\circ\text{C}$ **TEST METHOD AND PERFORMANCE****Damp heat, steady state:****Test conditions**

Temperature: +40°C $\pm 2^\circ\text{C}$
 Relative humidity (RH): 93% $\pm 2\%$
 Test duration: 56 days

Performance

Capacitance change $|\Delta C/C|$: $\leq 5\%$
 DF change ($\Delta \text{tg}\delta$): $\leq 50 \times 10^{-4}$ at 1kHz
 Insulation resistance: $\geq 50\%$ of initial limit.

Endurance:**Test conditions**

Temperature: +105°C $\pm 2^\circ\text{C}$
 Test duration: 2000 h
 Voltage applied: 1.25x V_C

Performance

Capacitance change $|\Delta C/C|$: $\leq 5\%$
 DF change ($\Delta \text{tg}\delta$): $\leq 50 \times 10^{-4}$ at 10kHz for C $\leq 1\mu\text{F}$
 $\leq 30 \times 10^{-4}$ at 1kHz for C $> 1\mu\text{F}$
 Insulation resistance: $\geq 50\%$ of initial limit.

Resistance to soldering heat:**Test conditions**

Solder bath temperature: +260°C $\pm 5^\circ\text{C}$
 Dipping time (with heat screen): 10 s ± 1 s

Performance

Capacitance change $|\Delta C/C|$: $\leq 2\%$
 DF change ($\Delta \text{tg}\delta$): $\leq 50 \times 10^{-4}$ at 10kHz for C $\leq 1\mu\text{F}$
 $\leq 30 \times 10^{-4}$ at 1kHz for C $> 1\mu\text{F}$
 Insulation resistance: \geq initial limit.

Long term stability (after two years):**Storage:** standard environmental conditions (see page 12).**Performance**

Capacitance change $|\Delta C/C|$: $\leq 3\%$ for C $\leq 0.1\mu\text{F}$
 $\leq 2\%$ for C $> 0.1\mu\text{F}$

RELIABILITY:

Reference MIL HDB 217

Application conditions:

Temperature: +40°C $\pm 2^\circ\text{C}$
 Voltage: 0.5x V_R
 Failure rate: ≤ 5 FIT
 (1 FIT = 1×10^{-9} failures/componentsxh)








Failure criteria:

Short or open circuit
 Capacitance change $|\Delta C/C|$: $> 10\%$
 DF change ($\Delta \text{tg}\delta$): $> 2 \times$ initial limit.
 Insulation resistance: $< 0.005 \times$ initial limit.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

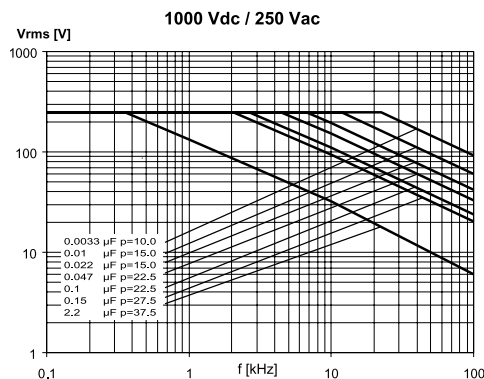
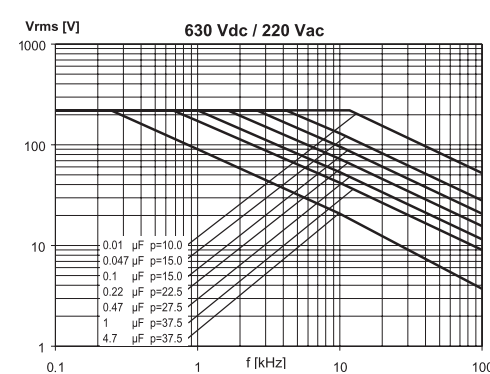
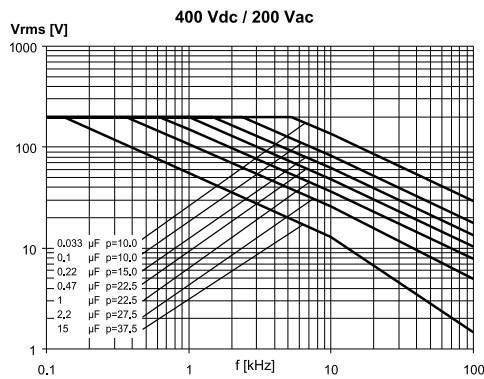
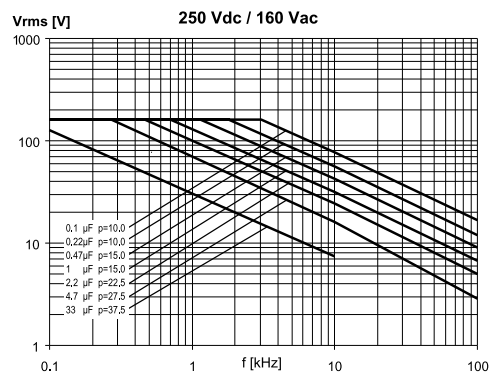
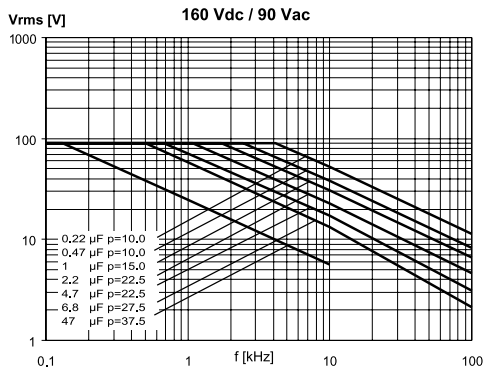
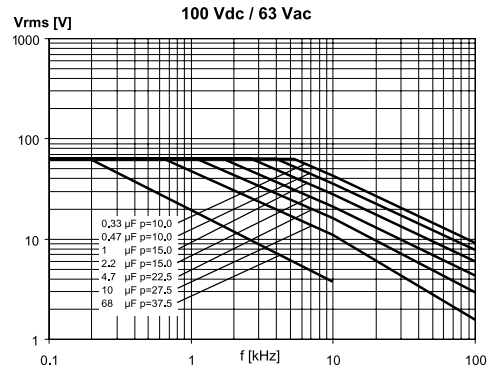
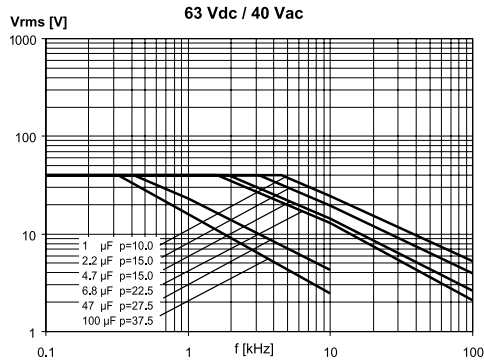


Note: p (pitch) in mm.

METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS

PRODUCT CODE: R60

MAX. CURRENT ($I_{r.m.s.}$) VERSUS FREQUENCY (sinusoidal wave-form / $T_h \leq 40^\circ C$)

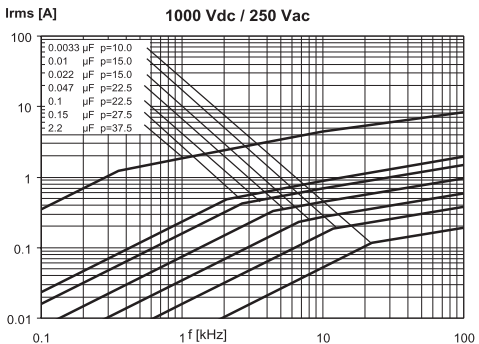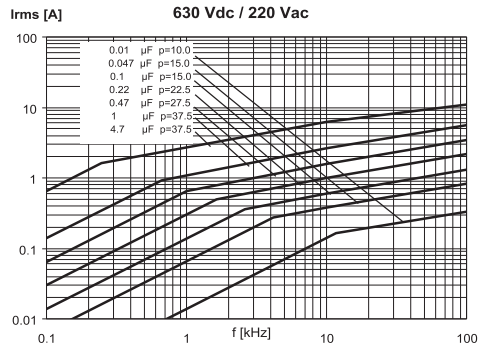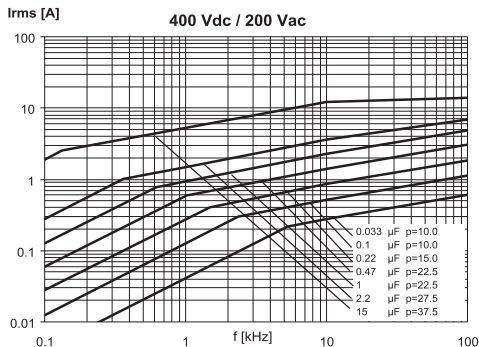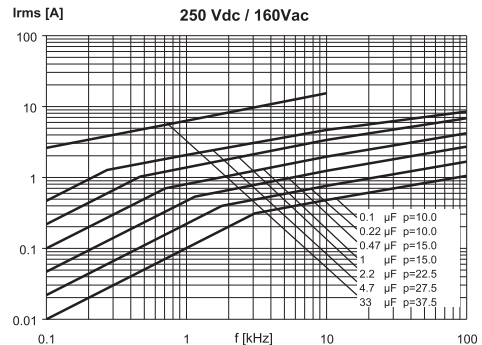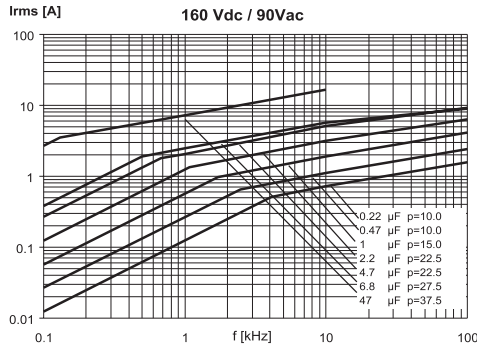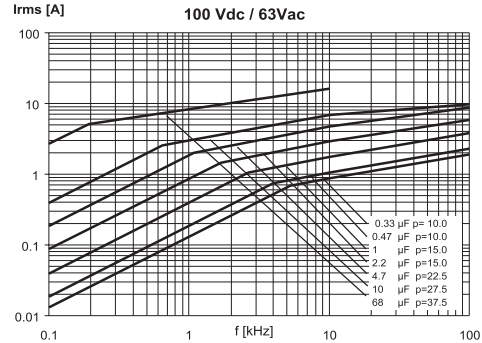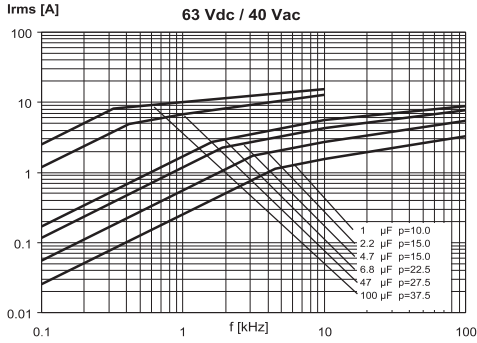

Note: p (pitch) in mm.