

SP86-A



SP86-B




SPECIFICATIONS


CIRCUIT: SPDT
 CURRENT RATING: 12mA
 VOLTAGE RATING: 24 VDC
 TEST VOLTAGE: 150V
 CONTACT RESISTANCE: 50 m Ω Max (initial)
 INSULATION RESISTANCE: 100 M Ω min.
 OPERATING FORCE: 200gf \pm 50gf
 TOTAL TRAVEL: 2.5mm \pm 0.2mm
 OPERATING LIFE: 500,000 cycles min.
 SOLDER SPECIFICATION: 265 \circ C for 5 seconds
 FUNCTION: Momentary
 OPERATING TEMPERATURE: +10 \circ C ~ +60 \circ C

CAP COLOR	"A" DIMENSION
1~9	14.5
10	15.5







SP86-A

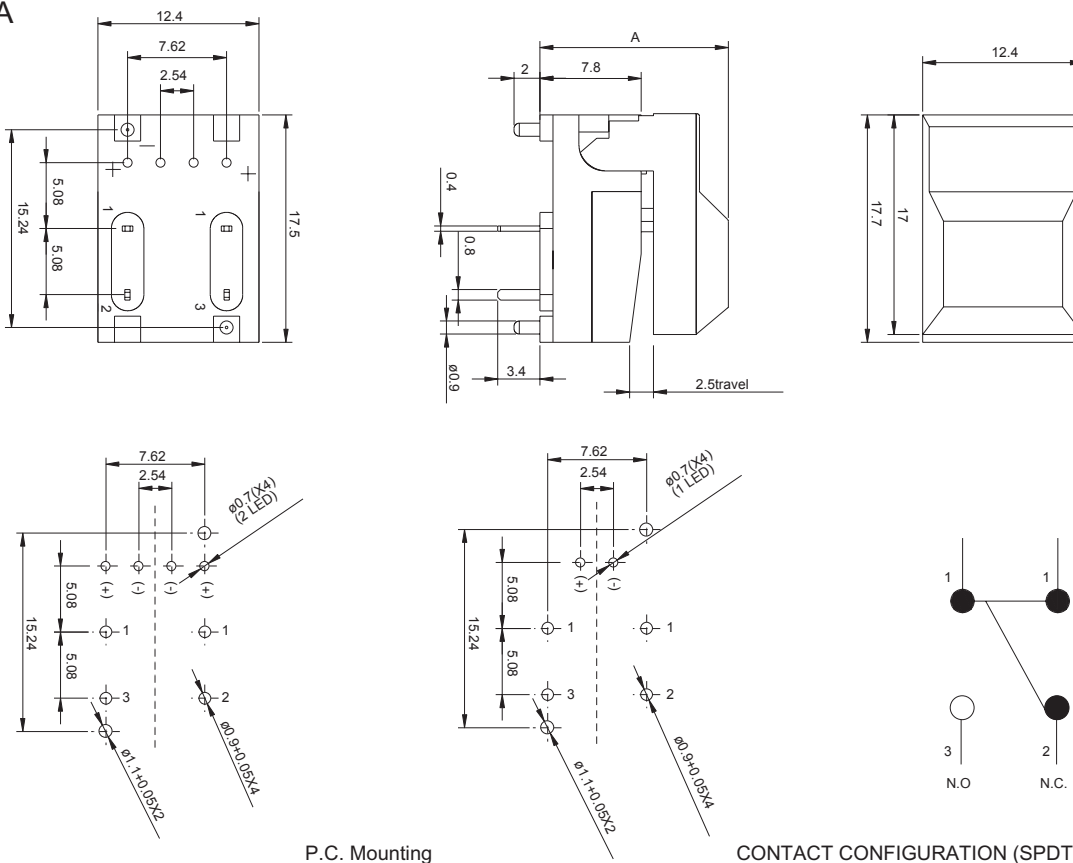

PAPERBOARD

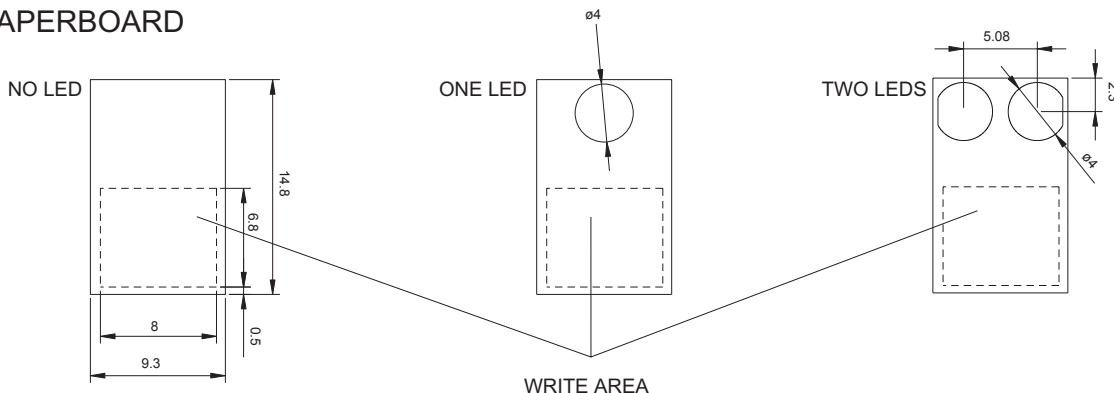


SP86-B

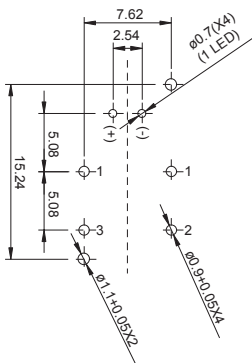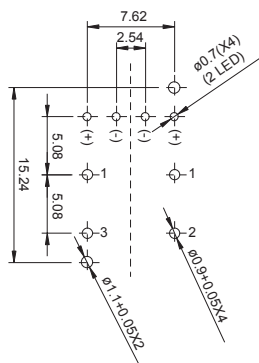

P.C. Mounting


CONTACT CONFIGURATION (SPDT)

PAPERBOARD

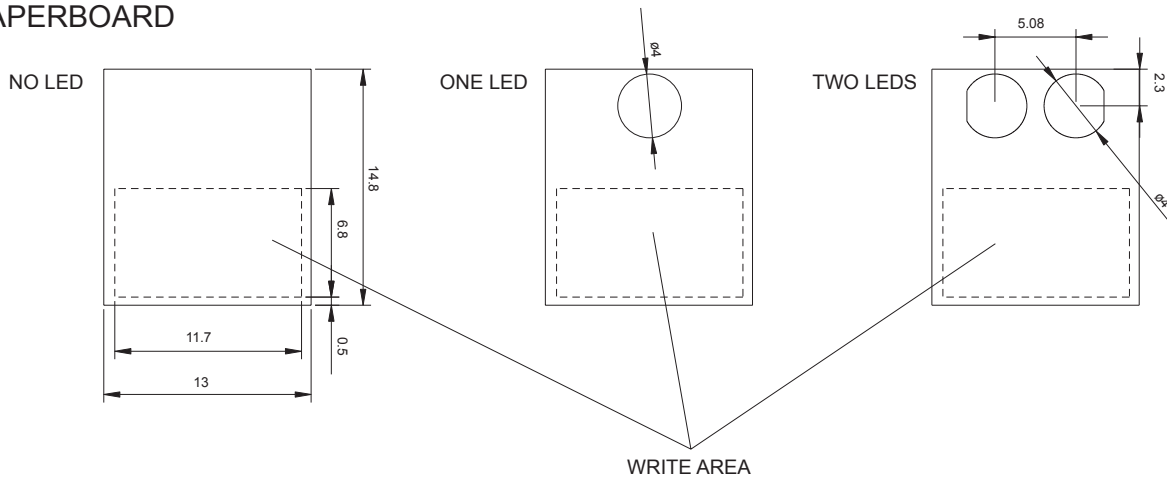


HOW TO ORDER

S P 8 6



CAP STYLES



CAP COLORS

- 1 = RED
- 2 = YELLOW
- 3 = GREEN
- 4 = WHITE
- 5 = BLACK
- 6 = ORANGE
- 7 = BLUE
- 9 = GREY
- 10 = TRANSPARENT

L R

LED COLORS

- 0 = Without LED
- 1 = RED
- 2 = YELLOW
- 3 = GREEN