



## SURFACE MOUNT RECTIFIER GLASS PASSIVATED FAST RECOVERY RECTIFIER

**RSM101 THRU RSM107**


**VOLTAGE RANGE** 50 to 1000 Volts  
**CURRENT** 1.0 Ampere

### FEATURES

- For surface mounted applications
- Glass passivated chip junction
- Low leakage current
- Fast switching speed
- Plastic package has underwrites laboratory flammability Classification 94V-0
- High temperature soldering guaranteed 250°C/10 second at terminals

### MECHANICAL DATA

- Case: molded plastic
- Polarity: band indicate cathode
- Mounting position: Any
- Weight: 0.12 grams

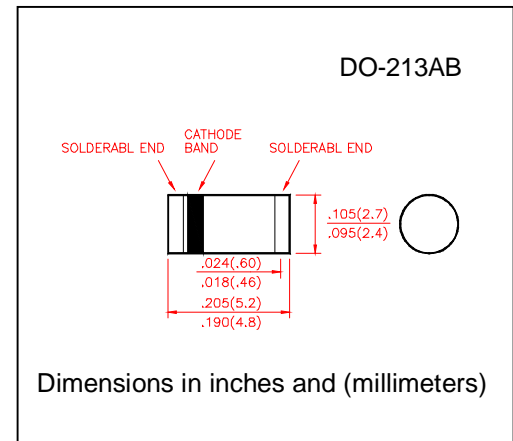

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	RSM 101	RSM 102	RSM 103	RSM 104	RSM 105	RSM 106	RSM 107	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current $T_T=100^\circ\text{C}$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A	$V_F$	1.3							Volts
Maximum DC Reverse Current at rated DC Blocking Voltage at	$T_A = 25^\circ\text{C}$	5.0							$\mu\text{A}$
	$T_A = 125^\circ\text{C}$	100							
Typical Reverse Recovery Time (NOTE 1) $T_J=25^\circ\text{C}$	$T_{rr}$	150				250	500		nS
Typical Junction Capacitance (Note 2)	$C_J$	15							PF
Typical Thermal Resistance (Note 3)	$R_{\theta JT}$	40							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

#### Notes:

1. Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$
2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts DC.
3. Thermal resistance from Junction to terminal 6.0mm<sup>2</sup> copper pads to each terminal.




SURFACE MOUNT RECTIFIER GLASS PASSIVATED FAST RECOVERY RECTIFIER

RSM101 THRU RSM107


VOLTAGE RANGE 50 to 1000 Volts  
CURRENT 1.0 Ampere

RATINGS AND CHARACTERISTIC CURVES RSM101 THRU RSM107


F1G.1-FORWARD CURRENT DERATING CURVE

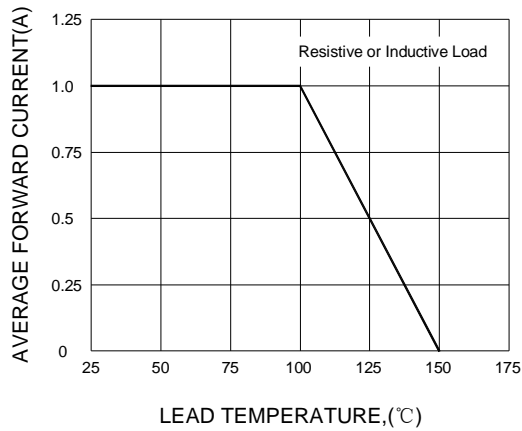


F1G.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

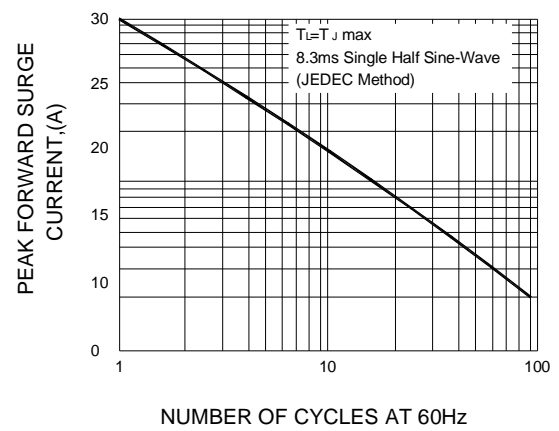


F1G.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

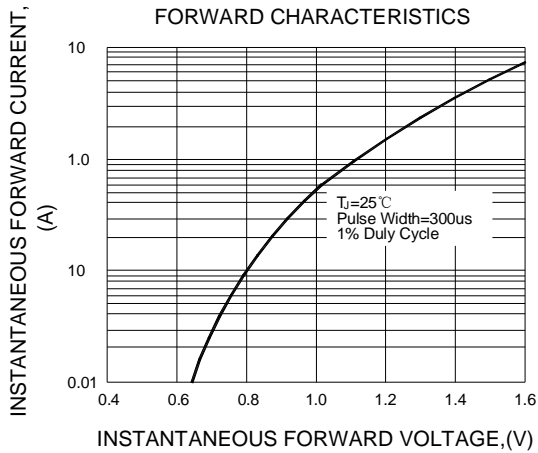

F1G.4-TYPICAL REVERSE CHARACTERISTICS

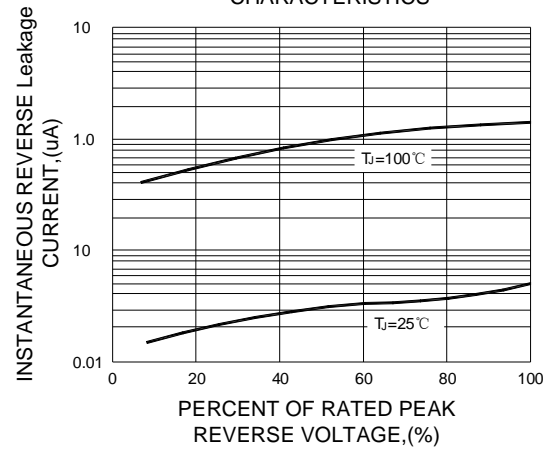

F1G.5-TYPICAL JUNCTION CAPACITANCE

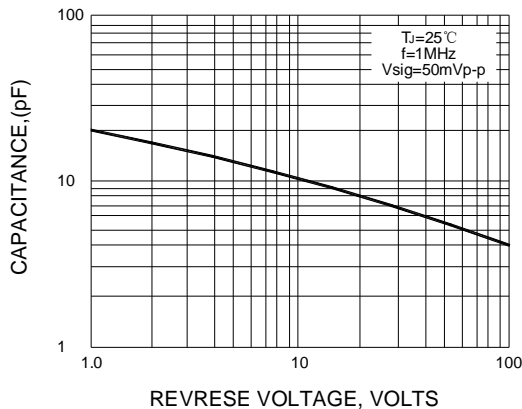

F1G.6-TRANSIENT THERMAL IMPEDANCE

