

Datasheet

Multi-Rate (2.7 Gbps) Single-Mode 50 km SFP Transceivers

SFP-MR27D-LR1 and SFP-MR27D-LR1TH



Features

- SFP transceiver
- Data Rates: 100 - 2700 Mbps
- Protocols:
 - Fast Ethernet
 - Gigabit Ethernet
 - 1 Gbps Fibre Channel
 - 2 Gbps Fibre Channel
 - Digital Video
 - OC-3/STM-1 to OC-48/STM-16 and OC-48 with FEC
- Single-mode fiber
- 1310 nm
- 24 to 50 km
- Duplex LC connector
- Digital Diagnostics (SFF-8472)
- Hot-swap
- Industrial temperature models available
- Compliances (see last page for details)

Overview

Small Form-Factor Pluggable (SFP) interfaces from MRV Communications provide flexible high speed links in a small industry-standard package. They deliver the deployment options and inventory control that network administrators demand for growing networks.

SFPs are designed to Multi-Source Agreement (MSA) standards to ensure network equipment compatibility. They are a perfect addition to MRV’s extensive lines of networking equipment.

Visit the MRV website at www.mrv.com or contact your nearest authorized MRV Communications dealer for more information.

Specifications Overview

Data Rate	100 - 2700 Mbps
Tx Wavelength	1310 nm
Tx Power (Minimum)	-2 dBm
Tx Disable	Yes
Rx Wavelength Range	1200 - 1625 nm
Rx Sensitivity	-27 dBm
Rx Saturation	-9 dBm
Damage Threshold	4 dBm
Operating Temperature Range	-5 to 70 °C
Operating Temperature Range (TH Models)	-40 to 85 °C
Power Consumption	1 Watt

Datasheet

Transmitter Specifications, Optical

Parameter	Symbol	Min	Max	Unit	Notes
Optical Power	P _{op}	-2	3	dBm	-
Average Launch Power (Tx: Off)	P _{off}	-	-45	dBm	-
Extinction Ratio	ER	8.2	-	dB	-
Eye Mask	-	IEEE 802.3ah and SONET/SDH compliant			-
Optical Jitter Generation	J _{gen}	-	0.007	UI	-
Optical Rise Time	t _r	-	160	ps	1
Optical Fall Time	t _f	-	160	ps	1
Mean Wavelength	λ	1280	1335	nm	-
Spectral Width (20 dB)	Δλ	-	1	nm	-
Relative Intensity Noise	RIN	-	-120	dB/Hz	-
Reflectance Tolerance	rp	-12	-	dB	2

- Notes:**
1. 20% - 80% values
 2. 1 dB degradation of receiver sensitivity

Receiver Specifications, Optical

Parameter	Symbol	Min	Max	Unit	Notes
Receive Power Low	R _{sens,low}	-	-27	dBm	1
Receive Power High	R _{sens,high}	-9	-	dBm	1
Damage Threshold	P _{in,damage}	4	-	dBm	-
Wavelength	λ	1200	1625	nm	-
Maximum Reflectance	R _{X_r}	-	-27	dB	-
LOS Assert	-	-42	-	dBm	-
LOS De-assert	-	-	-28	dBm	-
LOS Hysteresis	-	0.5	-	dB	-

- Notes:**
1. Measured at 10⁻¹⁰ BER, PRBS 2²³-1 for SONET, 10⁻¹² BER, PRBS 2⁷-1 for Gigabit Ethernet

Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration	Formula
Temperature	-5 to 70	± 3	°C	External	T _c (C) = T _{slope} *T _{ad} (16 bit signed twos complement value) + T _{offset}
Temperature (TH)	-40 to 85	± 3	°C	External	T _c (C) = T _{slope} *T _{ad} (16 bit signed twos complement value) + T _{offset}
Voltage	0 to V _{CC}	± 0.1	V	External	V(Volts) = V _{slope} *V _{ad} (16 bit unsigned integer) + V _{offset}
Bias Current	0 to 120	± 5	mA	External	I(mA) = I _{slope} *I _{ad} (16 bit unsigned integer) + I _{offset}
Tx Power	-2 to 3	±3	dBm	External	T _{x_PWR} (μW) = T _{x_PWRslope} *T _{x_PWRad} (16 bit unsigned integer) + T _{x_PWRoffset}
Rx Power	-27 to -9	±3	dBm	External	R _{x_PWR} (μW) = A ₀ + A ₁ *x + A ₂ *x ² + A ₃ *x ³ + A ₄ *x ⁴

General Operating

Parameter	Symbol	Min.	Max.	Unit	Notes
Supply Voltage	V _{CC}	3.135	3.465	V	-
Total Current, -40°C to -5°C	I _{CC}	-	500	mA	1
Total Current, -5°C to 85°C	I _{CC}	-	300	mA	-
Power Supply Noise Rejection	PSR	100	-	-	2
Operating Temperature	T _{Op}	-5	70	°C	-
Operating Temperature (TH Models)	T _{Op}	-40	85	°C	-
Storage Temperature	T _{St}	-40	85	°C	-
Data Rate	DR	100	2700	Mbps	-

- Notes:**
1. Denotes deviation from MSA
 2. 20 Hz to 155 MHz

Datasheet

Transmitter Specifications, Electrical

Parameter	Symbol	Min	Max	Unit	Notes
Input Differential Impedance	R_{in}	80	120	Ω	-
PECL Single Ended Data Input Swing	$V_{in,p-p}$	250	1200	mV	-
TxFault_Fault	V_{fault}	2	V_{CC}	V	-
TxFault_Normal	V_{normal}	V_{EE}	$V_{EE}+0.5$	V	-
TxDisable_Disable	V_d	2	V_{CC}	V	-
TxDisable_Enable	V_{en}	V_{EE}	$V_{EE}+0.8$	V	-

Electrical Output

Parameter	Symbol	Min	Max	Unit	Notes
PECL Single Ended Data Output Swing	$V_{out,p-p}$	185	800	mV	-
Data Output Rise Time	t_r	-	175	ps	-
Data Output Fall Time	t_f	-	175	ps	-


Timing and Electrical

Parameter	Symbol	Min	Max	Unit	Notes
Tx Disable Negate Time	t_{on}	-	1	ms	-
Tx Disable Assert Time	t_{off}	-	10	μs	-
Time to Initialize, Including Reset of Tx Fault	t_{init}	-	300	ms	-
Tx Fault Assert Time	t_{fault}	-	100	μs	-
Tx Disable to Reset	t_{reset}	10	-	μs	-
LOS Assert Time	$t_{loss_{on}}$	-	100	μs	-
LOS De-assert Time	$t_{loss_{off}}$	-	100	μs	-
Serial ID Clock Rate	f_{serial_clock}	-	100	KHz	-
RX_LOS Voltage (High)	RX_LOS_H	2	-	V	-
RX_LOS Voltage (Low)	RX_LOS_L	-	0.8	V	-
LOS Output Voltage-Fault	$V_{LOS\ fault}$	2	V_{CC}	V	-
LOS Output Voltage-Normal	$V_{LOS\ normal}$	V_{EE}	$V_{EE}+0.5$	V	-
MOD_DEF (0:2)-High	V_H	2	V_{CC}	V	-
MOD_DEF (0:2)-Low	V_L	V_{EE}	$V_{EE}+0.5$	V	-

Datasheet

Pin	Function	Notes
1	V _{eeT}	TX Ground
2	TX_FAULT	Open Collector
3	TX_DISABLE	Internally Pulled High
4	MOD_DEF2	Serial Data Input
5	MOD_DEF1	Serial Clock Input
6	MOD_DEF0	Internally Grounded
7	NC	Not Connected
8	LOS	Open Collector
9	V _{eeR}	RX Ground
10	V _{eeR}	RX Ground
11	V _{eeR}	RX Ground
12	RXD-	RX Data Negative
13	RXD+	RX Data Positive
14	V _{eeR}	RX Ground
15	V _{ccR}	RX Power
16	V _{ccT}	TX Power
17	V _{eeT}	TX Ground
18	TXD+	TX Data Positive
19	TXD-	TX Data Negative
20	V _{eeT}	TX Ground

Outline Drawing

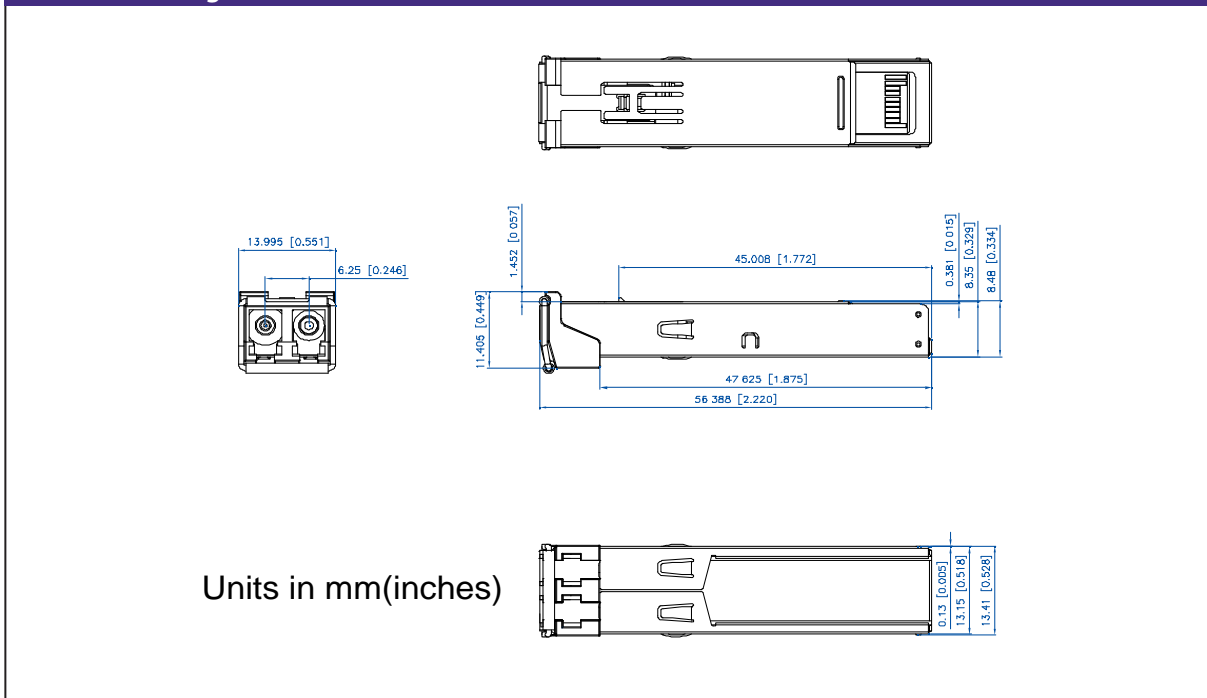



Datasheet

Ordering Information

Model	Description	Data Rate	Wavelength (nm)	Bail Latch Color	Distance Range (km)
SFP-MR27D-LR1	Multi-Rate SFP Transceiver with Digital Diagnostics	100 - 2700 Mbps	1310	Red	24 -50
SFP-MR27D-LR1TH	Multi-Rate SFP Transceiver with Digital Diagnostics, <i>Temperature Hardened</i>	100 - 2700 Mbps	1310	Red	24 -50

Regulatory and Industry Compliances

Class 1 Laser Product, Complies with 21CFR 1040.10, 1040.11 and EN 60825;
Certified by one or more of the following agencies: TÜV, UL, CSA;
RoHS Directive; China RoHS; California RoHS Law, REACH Directive SVHC; WEEE Directive
The Quality Management System is certified to ISO 9001 by QMI-SAI Global
The Environmental Management System is in compliance with ISO 14001

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

MRV has more than 50 offices throughout the world. Addresses, phone numbers and fax numbers are listed at www.mrv.com. Please e-mail us at sales@mrv.com or call us for assistance.

MRV Los Angeles
20415 Nordhoff St.
Chatsworth, CA 91311
800-338-5316
818-773-0900

MRV Boston
295 Foster St.
Littleton, MA 01460
800-338-5316
978-952-4700

MRV International
Business Park Moerfelden
Waldeckerstrasse 13
64546 Moerfelden-Walldorf
Germany
Tel. (49) 6105/2070
Fax (49) 6105/207-100

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.