



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2SA1201
2SA1201-O
2SA1201-Y

Features

- With SOT-89 package
- Power amplifier applications
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Maximum Ratings

Symbol	Rating	Rating	Unit
V _{CEO}	Collector-Emitter Voltage	-120	V
V _{CBO}	Collector-Base Voltage	-120	V
V _{EBO}	Emitter-Base Voltage	-5.0	V
I _C	Collector Current	-800	mA
I _B	Base Current	-160	mA
P _C	Collector power dissipation	500	W
		1000(Note 1)	
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

Note 1: Mounted on ceramic substrate (250mm² x 0.8t)

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ.	Max	Units
--------	-----------	-----	------	-----	-------

OFF CHARACTERISTICS

V _{(BR)CEO}	Collector-Emitter Breakdown Voltage* (I _C =-10mA, I _B =0)	-120	---	---	Vdc
V _{(BR)EBO}	Collector-Emitter Breakdown Voltage* (I _E =-1mA, I _C =0)	-5	---	---	Vdc
I _{CBO}	Collector-Base Cutoff Current (V _{CB} =-120Vdc, I _E =0)	---	---	-0.1	uAdc
I _{EBO}	Emitter-Base Cutoff Current (V _{EB} =-5.0Vdc, I _C =0)	---	---	-0.1	uAdc

ON CHARACTERISTICS


h _{FE}	Forward Current Transfer ratio (I _C =-0.1Adc, V _{CE} =-5.0Vdc) (Note 2)	80	---	240	---
V _{CE(sat)}	Collector-Emitter Saturation Voltage (I _C =-0.5Adc, I _B =-50mA)	---	---	-1.0	Vdc
V _{BE}	Base-Emitter Voltage (I _C =-0.5Adc, V _{CE} =-5.0Vdc)	---	---	-1.0	Vdc
f _T	Transition Frequency (I _C =-0.1Adc, V _{CE} =-5.0Vdc)	---	120	---	MHz
C _{ob}	Collector Output Capacitance (V _{CB} =-10V, I _E =0, f=1MHz)	---	---	30	pF

CLASSIFICATION OF H_{FE} (1)

Rank	O	Y
Range	80-160	120-240
Marking	DO	DY

PNP Silicon
Power Transistors

SOT-89

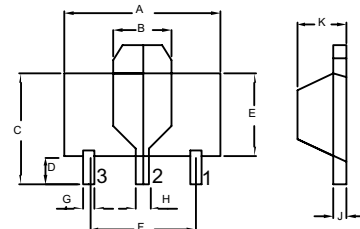







- 1.BASE
- 2.COLLECTOR
- 3.EMITTER

DIM	DIMENSINS				NOTES
	INCHES		MM		
A	.173	.181	4.39	4.60	
B	.063	.071	1.60	1.80	
C	.154	.165	3.91	4.19	
D	.031	.039	0.80	1.00	
E	.092	.100	2.34	2.54	
F	.118	----	3.00	----	TYP
G	.013	.019	0.33	0.48	
H	.015	.021	0.38	0.53	
J	.015	.016	0.38	0.41	
K	.055	.063	1.40	1.60	

2SA1201



Micro Commercial Components

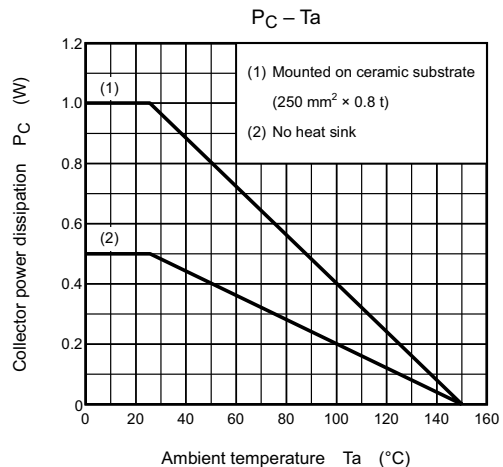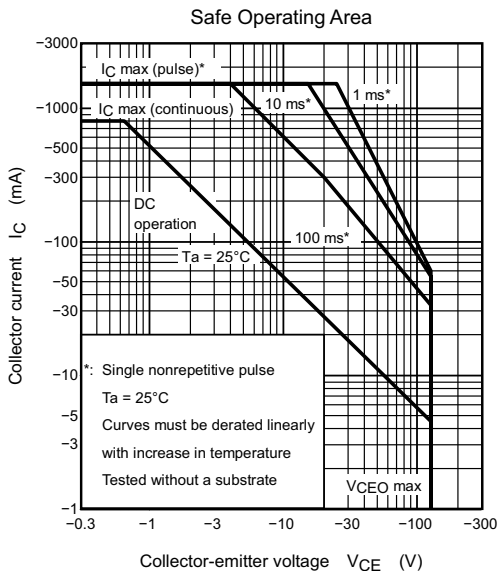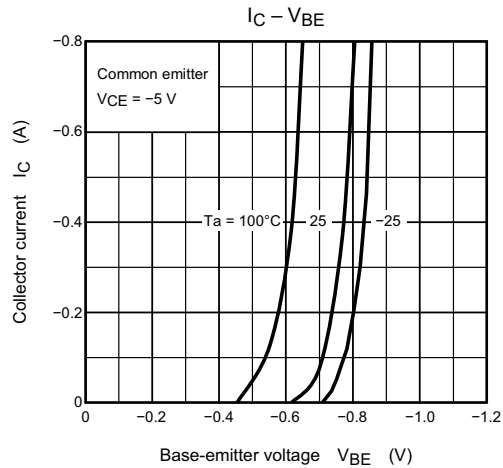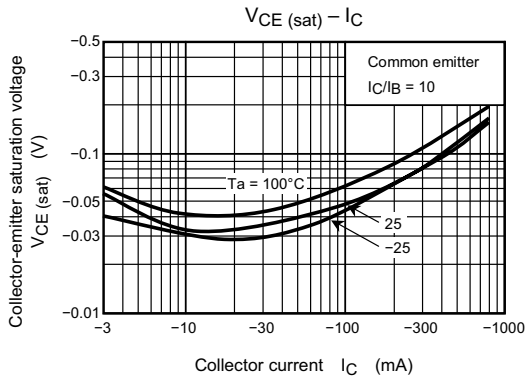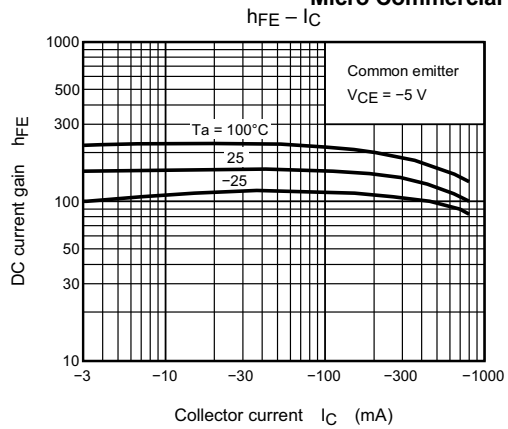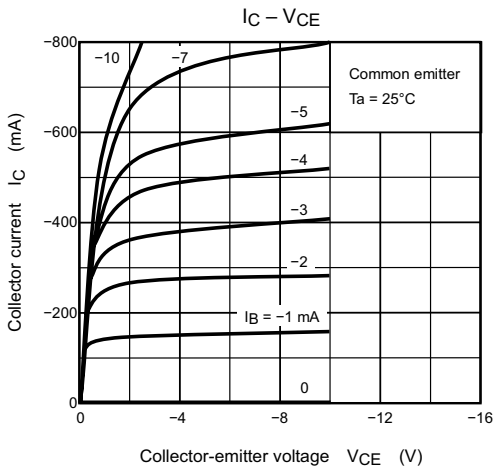



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;1Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com